




# Product Search

Screw terminal block / Plug-In terminal block/Lifting terminal block/Barrier terminal block  
Spring-type terminal block/Feed-through terminal block/ Rail terminal block/Wiring terminal block

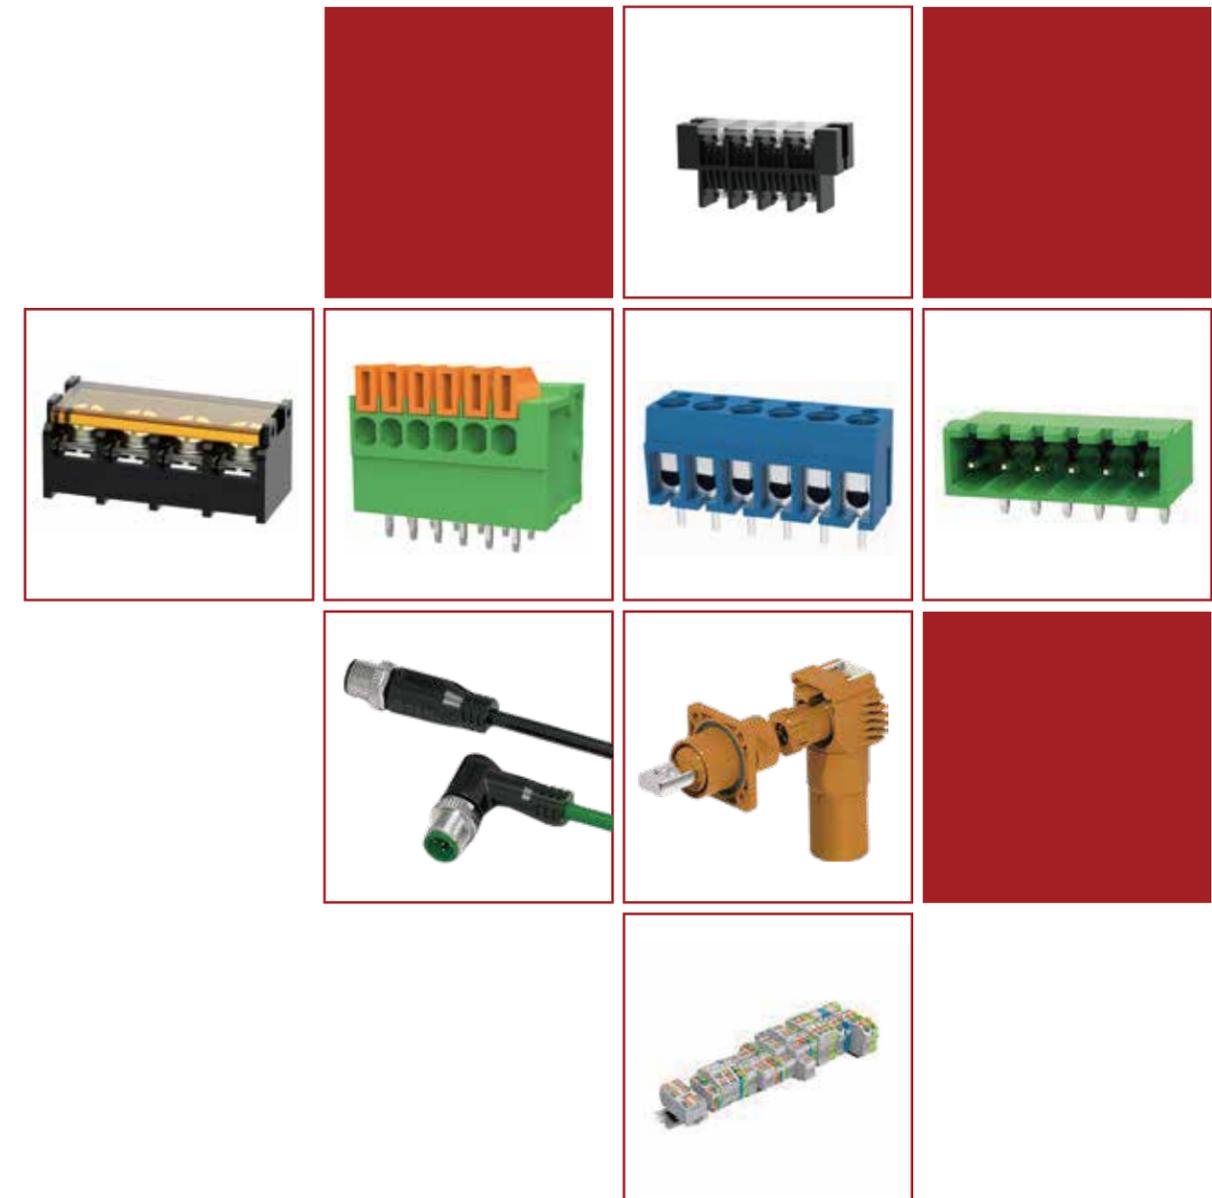

## Ningbo Dorabo Electric Co., Ltd

### Mainland China Headquarter

Information inquiry, consulting services, FAQs

+86-400-860-0988

info@terminalblock.net

### Technical advice consulting

Installation and debugging, application and configuration, troubleshooting

+86-18106644275

tech@terminalblock.net

### International Business Inquiry

Information inquiry, consulting services, FAQs

+86-13116659155 +86-13185980275

steven.lu@terminalblock.net info@terminalblock.net

### Domestic Business Inquiry

Product selection and solution consulting

+86-18058513799 +86-18106644275 +86-18966387535

sale@terminalblock.net

## Ningbo Dorabo Electric Co., Ltd

+86-400-860-0988



WeChat



Web



Catalogue

## Company Introduction

Founded in 2013, DORABO Electric is a well-recognized supplier for offering a comprehensive solution of industrial connectors. Since its inception, DORABO has prospered globally in the field of terminal blocks and industrial electrical connections, ranking among the leading players. Meanwhile, we carry out the concept of survival by quality, and our products are well received in more than 100 countries and regions such as China, the United States, Germany, the United Kingdom, Turkey, Japan, Singapore, etc. DORABO always strives to provide superior services for worldwide industries such as industrial automation, instrumentation, electric power, rail transportation, shipping, new energy, lift, lighting, security, aerospace and so on. Currently, all kinds of our products have been approved by CQC, UL, VDE, CE, etc. and our product also aligns with the standards of various management systems such as ISO9001, ISO14001 as well as environmental protection requirements of ROSH and REACH.



## Certification Display



## Industrial automation solutions

The application of connectors in industrial robots may encounter safety protection issues, DORABO Dibo Electric's connectors perfectly solve such problems.



## Rail Transit Solutions

The application of spring pressure connection technology makes short and long-distance transportation maintenance free. Connection becomes possible, DORABO Dibo Electric can provide more comprehensive Solution.



## Wind power generation solutions

Focusing on technological upgrading in the new energy industry, relying on next-generation intelligent connectivity Technology, providing a full process new energy connection from power generation, energy storage, to charging. Connect to application technology solutions.



## Intelligent Building Solutions

DORABO Dibo Electric is your high-quality partner throughout the entire process. Provide streetlight control interface, power and data connectors, relays, power and Customized interconnection solutions such as line filters help you create sustainable solutions. Continued, the future of efficiency and interconnectivity.




## 目录 Directory

	螺钉式接线端子 ..... 06 Screw terminal block
	插拔式接线端子 ..... 33 Plug-In terminal block
	栅栏式接线端子 ..... 86 Barrier terminal block
	弹簧式接线端子 ..... 106 Spring-type terminal block
	建筑布线式接线端子 ..... 120 Feed-through terminal block
	轨道式接线端子 ..... 121 Rail terminal block
	储能连接器 ..... 122 Energy storage connector
	圆形连接器 ..... 123 Circular Connector

Screw terminal block


# 螺钉式接线端子

The spring type terminal block utilizes the principle of lifting and lowering the clamp body in the most economical way, and takes into account the two major characteristics of compact structure and firm connection in design. Mainly based on 2P and 3P The cardinality can be independently concatenated and combined into any desired number of digits according to needs. The product can connect all types of wires with a cross-section of 0.08mm<sup>2</sup> to 16mm<sup>2</sup>,The spacing can be selected from 2.54mm to 15.0mm, and there are three entry methods: 90°, 135°, and 180°. The product design complies with international standards such as IEC60998 and UL1059 accurate Has obtained UL certification in the United States.

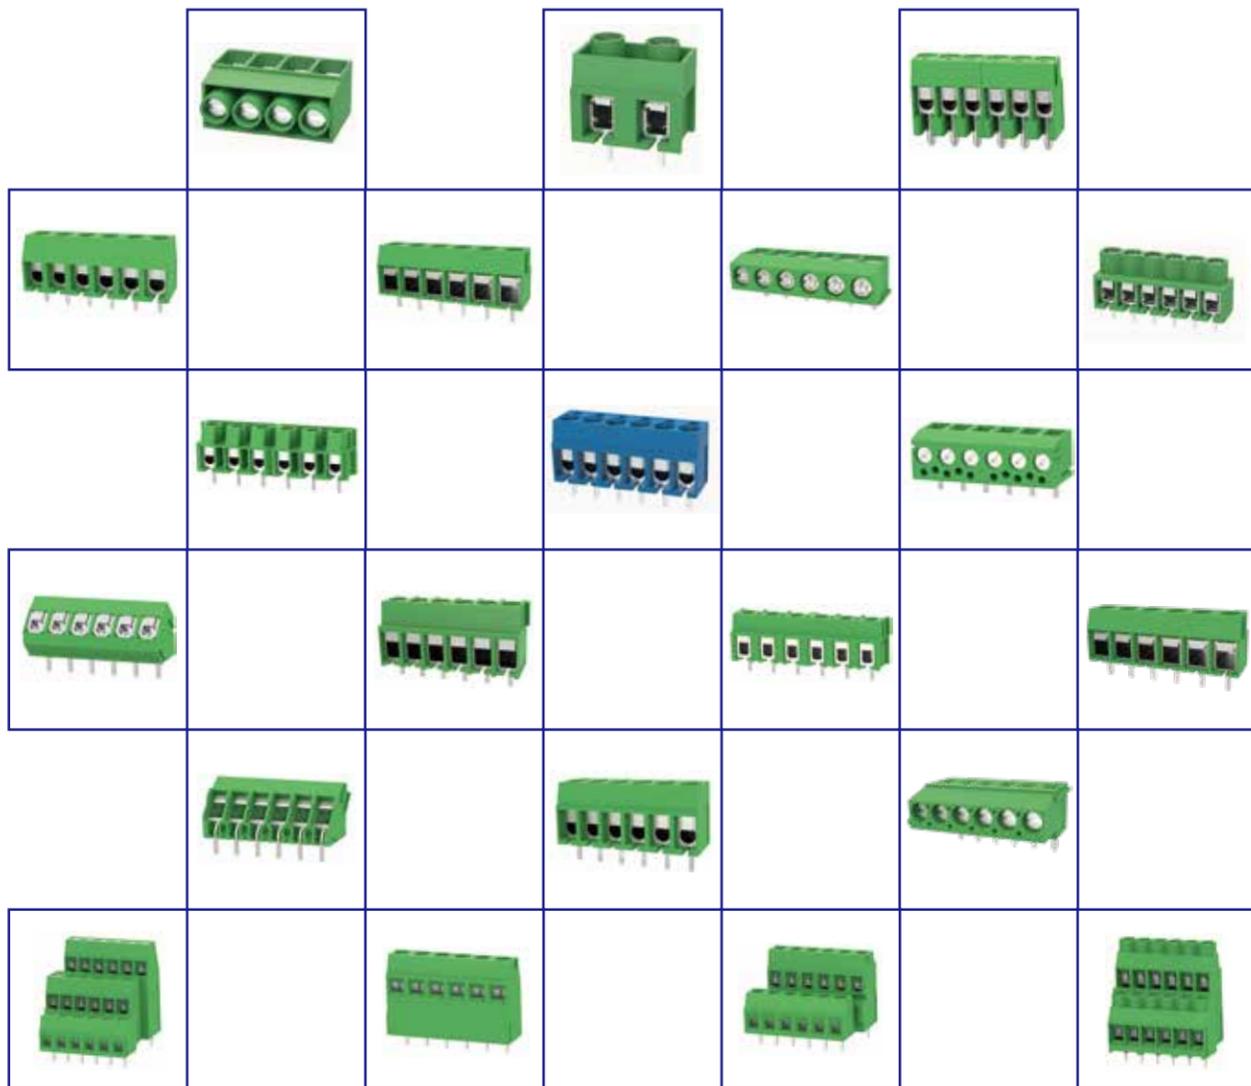


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B	C	D	
额定电压 Rated Voltage [V]	300	-	300	
额定电流 Rated Current [A]	15	-	10	
接线范围 Wire Range	26-12			
单/多芯线 Solid/Stranded [AWG]	26-12			
间距 Pitch [mm]	5.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.6/0.4			

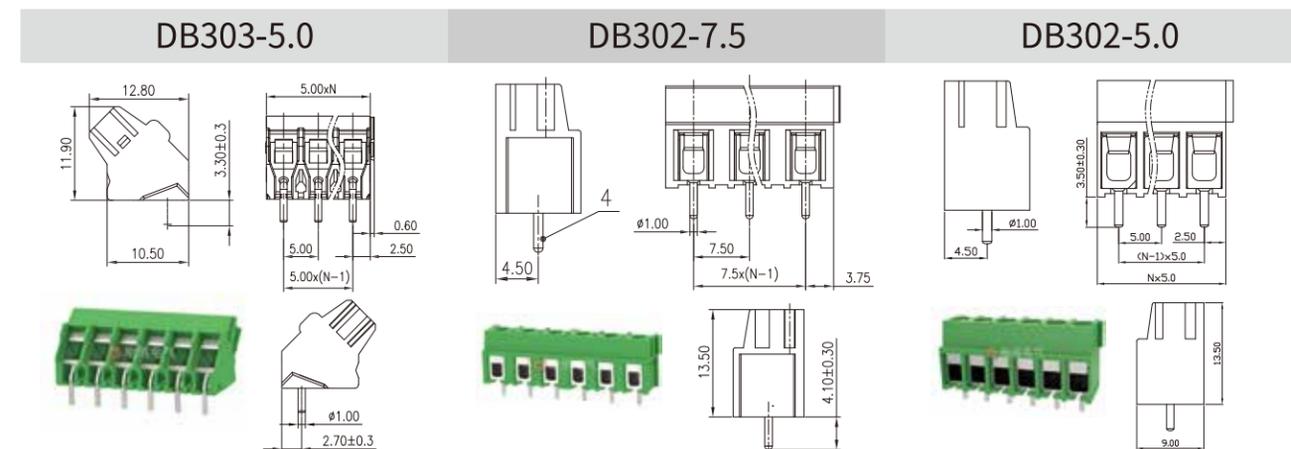


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B	C	D	
额定电压 Rated Voltage [V]	300	-	300	
额定电流 Rated Current [A]	10	-	10	
接线范围 Wire Range	26-16			
单/多芯线 Solid/Stranded [AWG]	26-16			
间距 Pitch [mm]	3.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2			

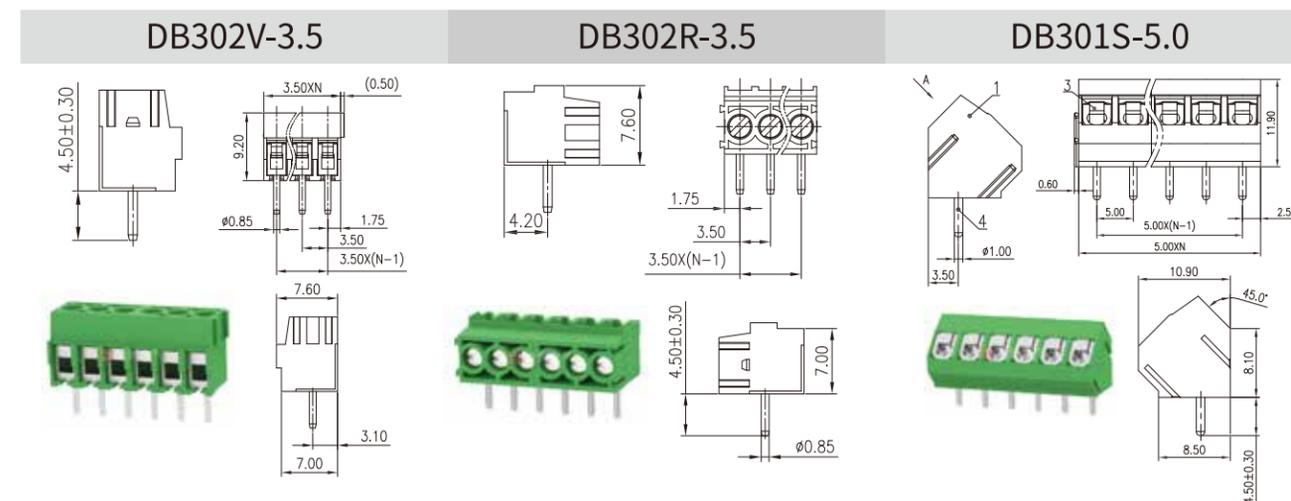


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C R US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	250 - 250	250	-	250
额定电流 Rated Current [A]	16 - 10	16	-	10
接线范围 Wire Range	22-14	22-14		
单/多芯线 Solid/Stranded [AWG]		22-14		
间距 Pitch [mm]	5.0	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4	M2.5/0.4		

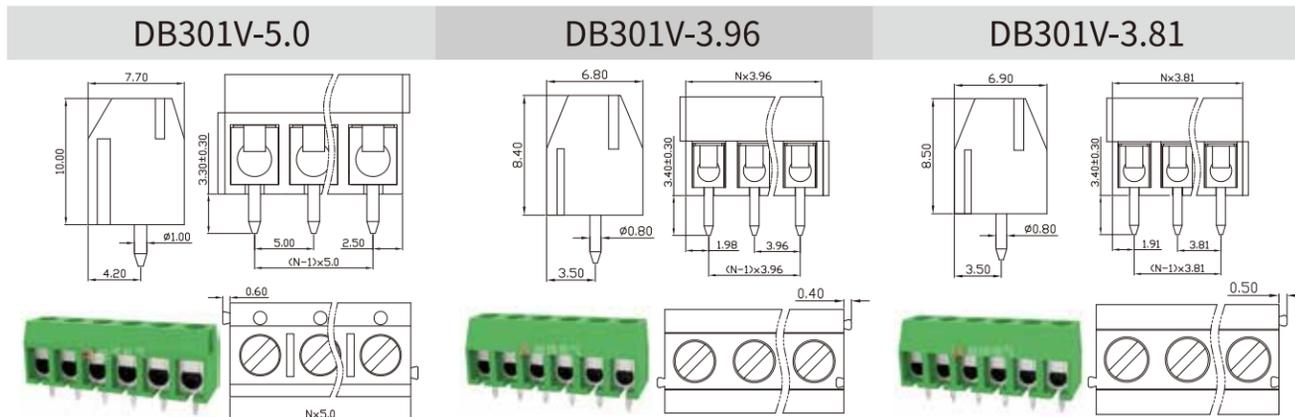


UL/CUL 技术参数 UL/CUL Technical Data		C R US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - -	300	-	-
额定电流 Rated Current [A]	7 - -	7	-	-
接线范围 Wire Range	24-18	24-18		
单/多芯线 Solid/Stranded [AWG]		24-18		
间距 Pitch [mm]	3.5	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2	M2/0.2		

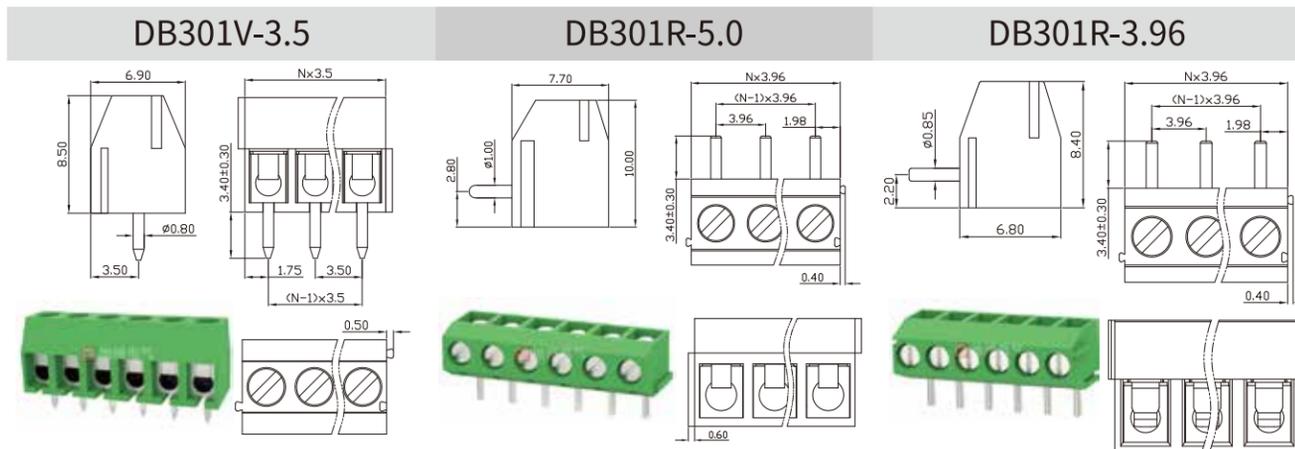


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C R US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	7 - 10	7	-	10
接线范围 Wire Range	24-18	24-18		
单/多芯线 Solid/Stranded [AWG]		24-18		
间距 Pitch [mm]	3.81	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2	M2.0/0.2		

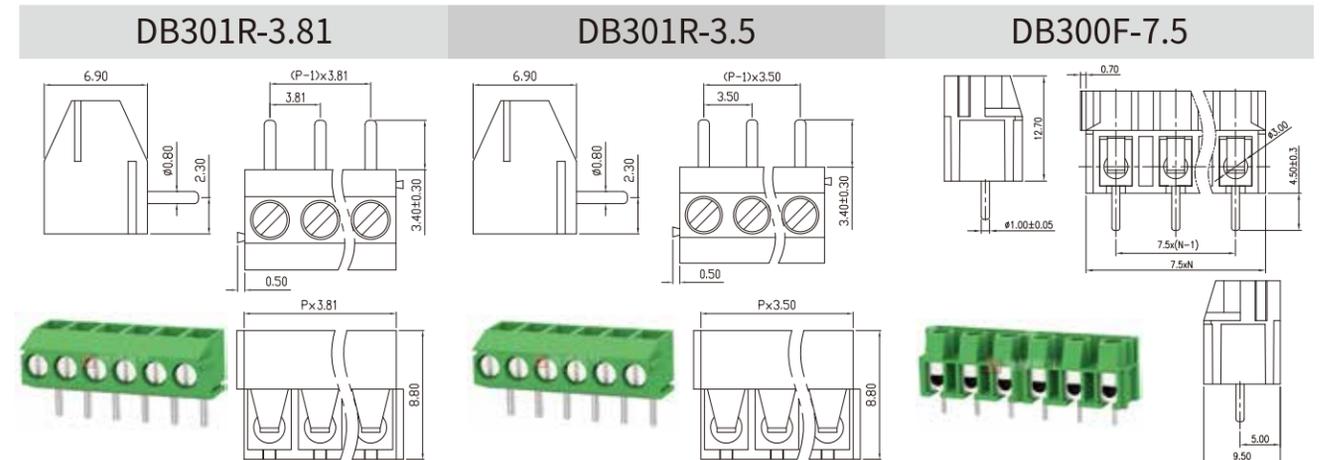

UL/CUL 技术参数 UL/CUL Technical Data		C R US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	130 - 130	130	-	130
额定电流 Rated Current [A]	16 - 10	16	-	10
接线范围 Wire Range	22-14	22-14		
单/多芯线 Solid/Stranded [AWG]		22-14		
间距 Pitch [mm]	7.5	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3.0/0.5	M3.0/0.5		

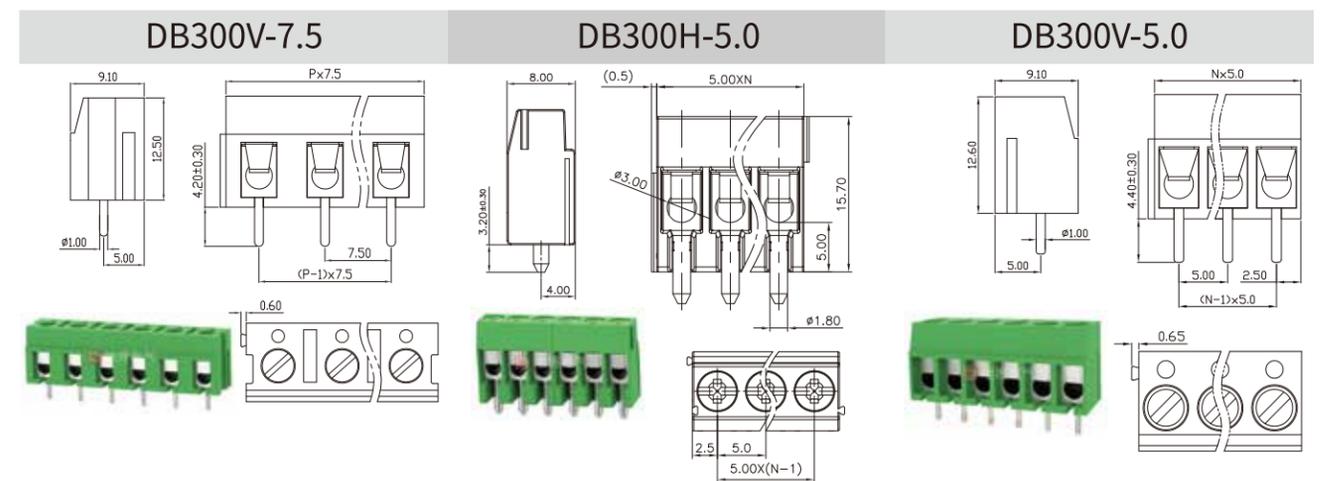


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	7	-	-
接线范围 Wire Range	24-18		
单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range	22-14		
单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	130	-	-
额定电流 Rated Current [A]	7	-	-
接线范围 Wire Range	24-18		
单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		


DB300V-3.81

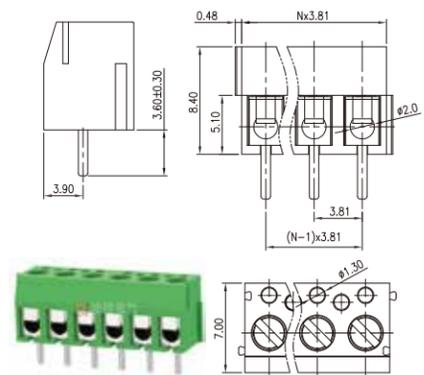


DB300R-5.0

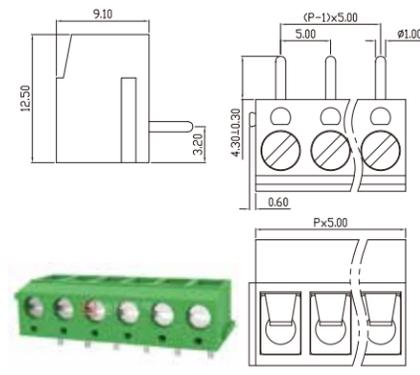


DB300R-3.81

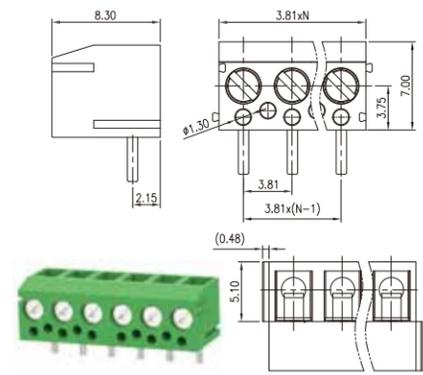


DB166-7.5

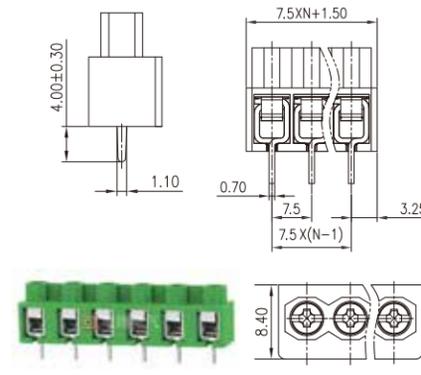

DB166-5.0

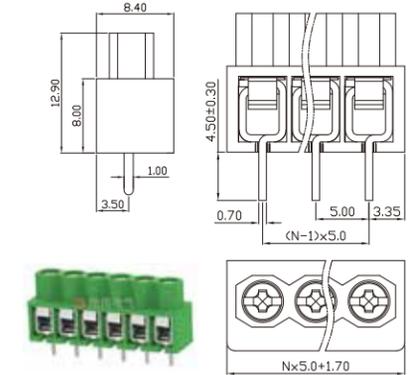

DB126-7.5-3P

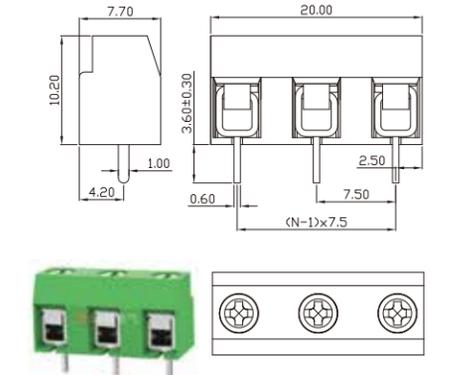

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.35		


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	26-14		
单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.25		


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	26-14		
单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.25		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	26-14		
单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.25		


DB167-7.62

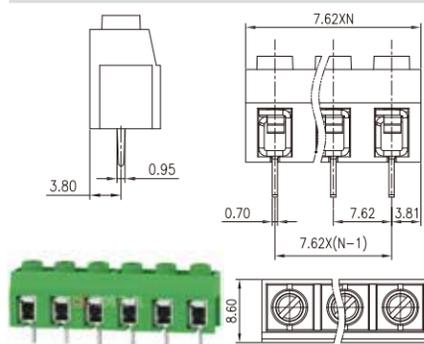


DB167V-5.0

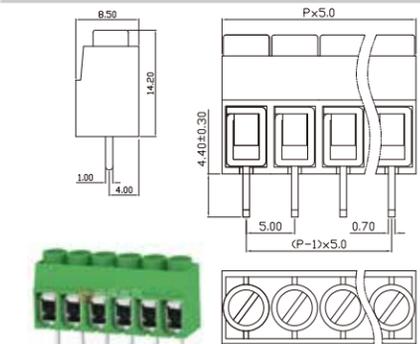


DB167R-5.0

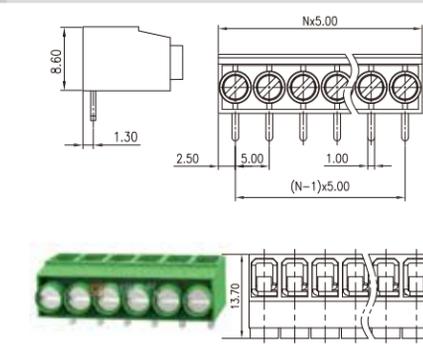


DB126-7.5-2P

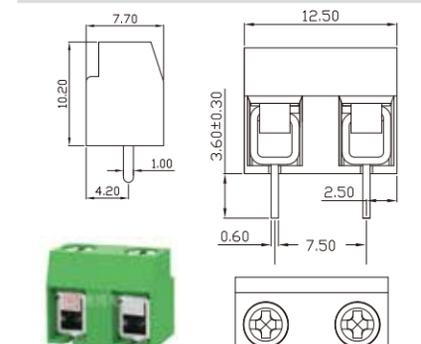

DB126V-5.0

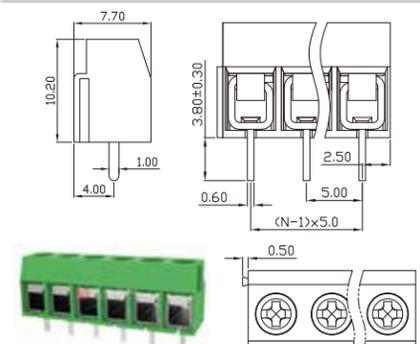


DB126R-5.0

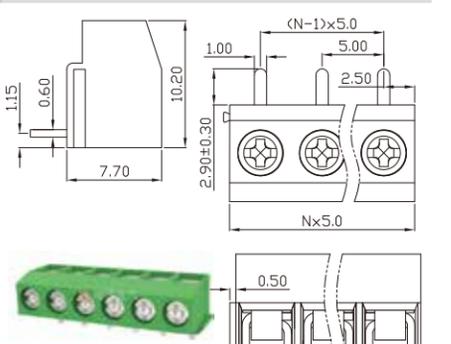

Screw terminal block

# 螺钉式接线端子




Fixed connectors can easily and safely transmit signals, data, and power to printed circuit boards. They are not only applicable to numerous fields in various industries, but also It can also be used in Industry 4.0 applications. Our COMBICON product range, which is applicable to all product families, offers both metric and English needle pitches, including 2.5 mm pin pitch micro terminal base to 20 mm pin pitch power module wiring terminal. The product design complies with international standards such as IEC60998 and UL1059. Has obtained UL certification in the United States.

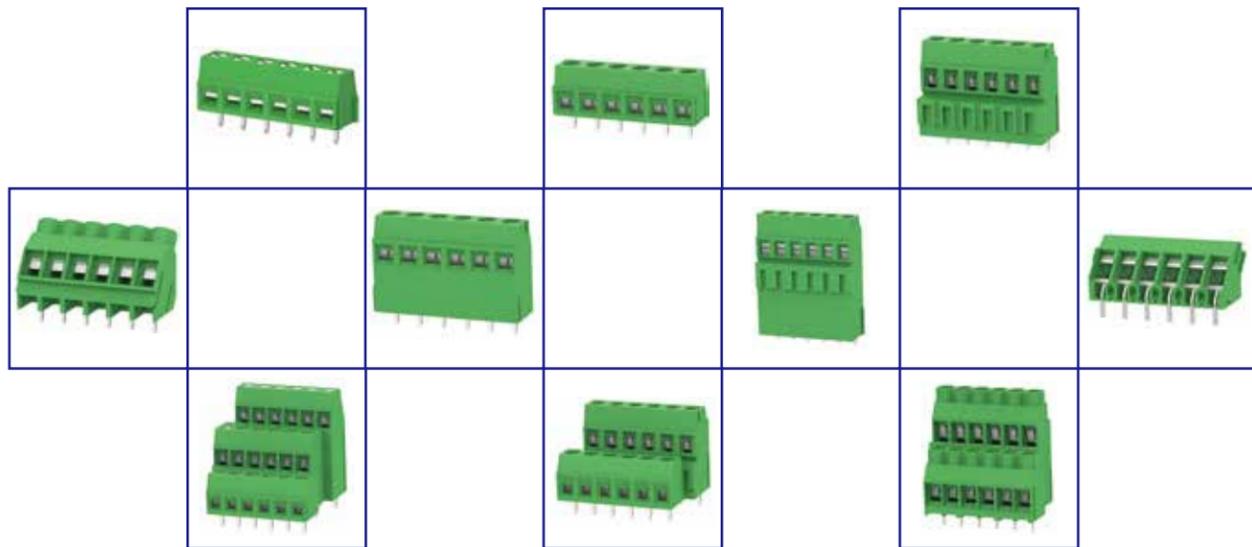

UL/CUL 技术参数 UL/CUL Technical Data		UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

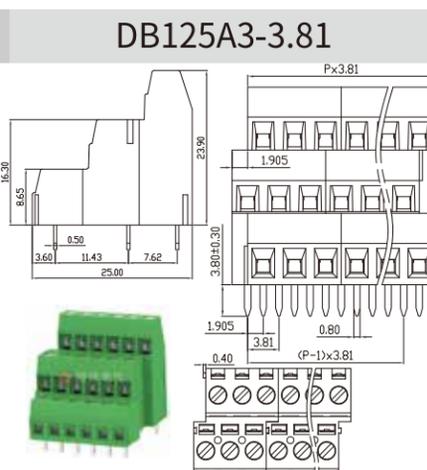
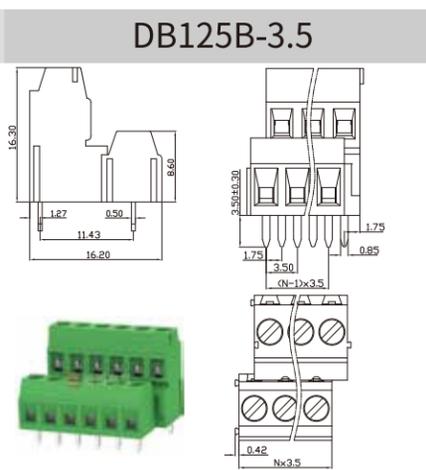
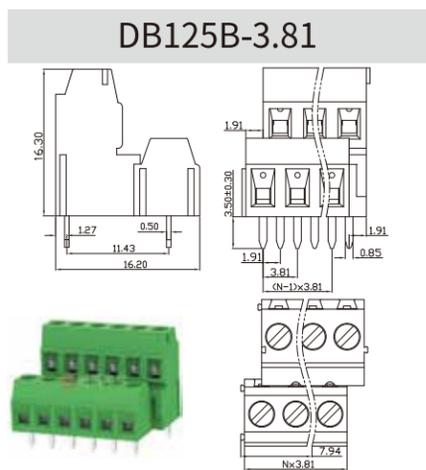


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		




UL/CUL 技术参数 UL/CUL Technical Data		UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

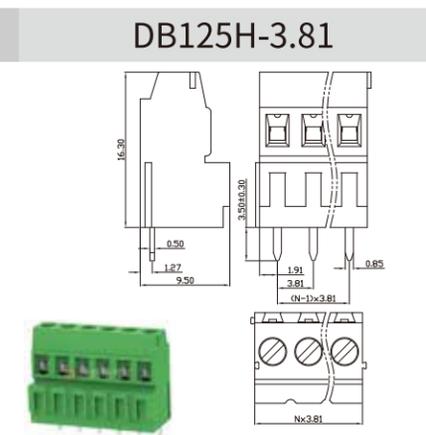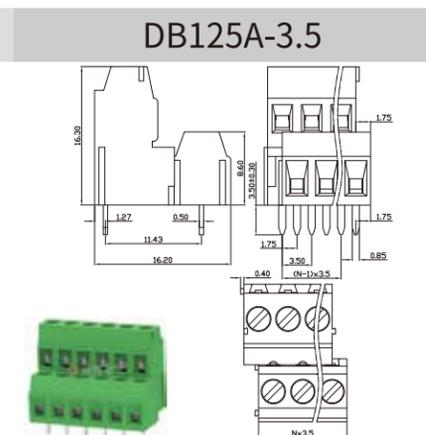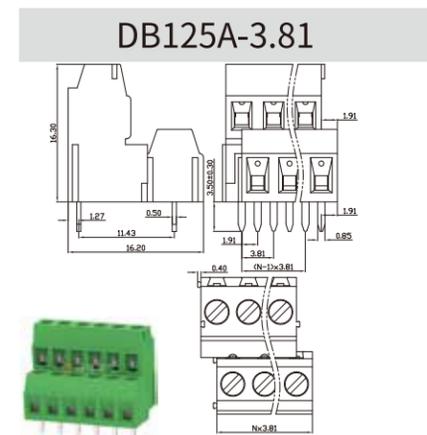

UL/CUL 技术参数 UL/CUL Technical Data		UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		


UL/CUL 技术参数 UL/CUL Technical Data		UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		16	-	-
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		16	-	-
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

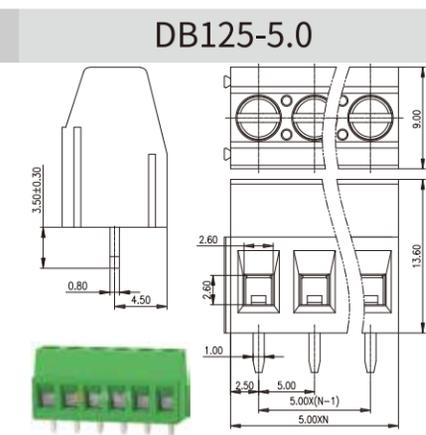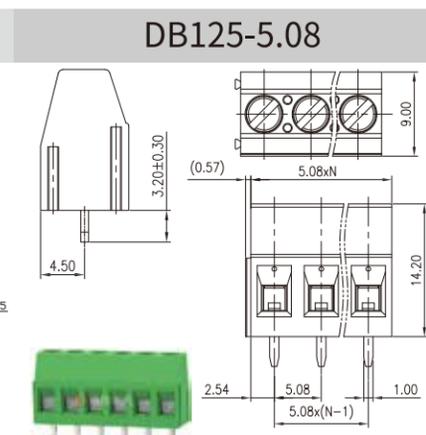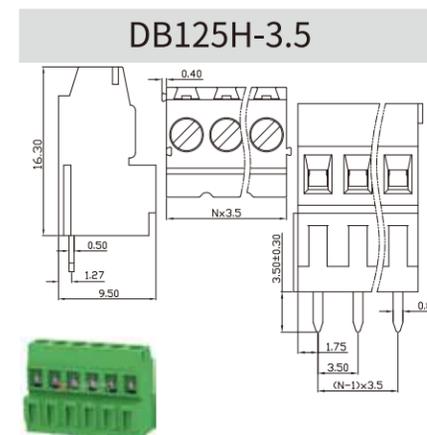


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - -	300	-	-
额定电流 Rated Current [A]	150 - -	150	-	-
接线范围 Wire Range	单/多芯线 Solid/Stranded [AWG]	30-14		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.0/0.2		

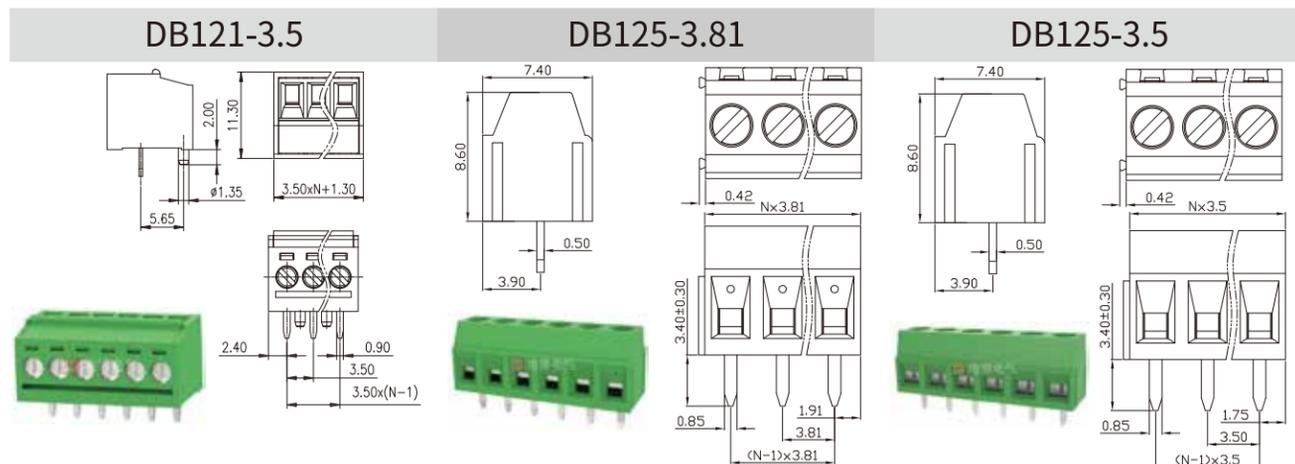


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	150 - -	150	-	-
额定电流 Rated Current [A]	7 - -	7	-	-
接线范围 Wire Range	单/多芯线 Solid/Stranded [AWG]	26-18		
间距 Pitch [mm]		2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M1.6/0.1		

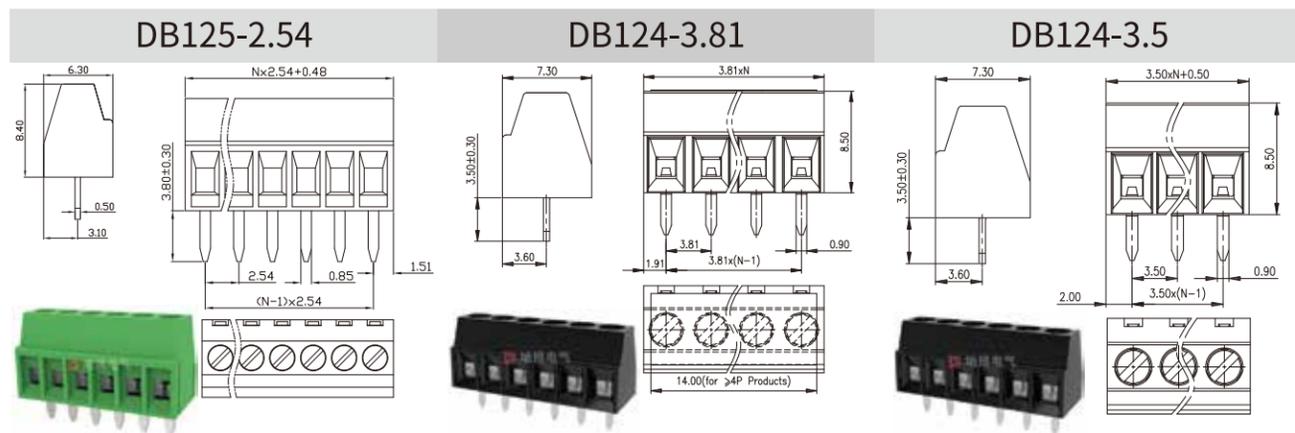


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	200 - 200	200	-	200
额定电流 Rated Current [A]	13.5 - 13.5	13.5	-	13.5
接线范围 Wire Range	单/多芯线 Solid/Stranded [AWG]	30-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - -	300	-	-
额定电流 Rated Current [A]	30 - -	30	-	-
接线范围 Wire Range	单/多芯线 Solid/Stranded [AWG]	26-10		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3.0/0.5		

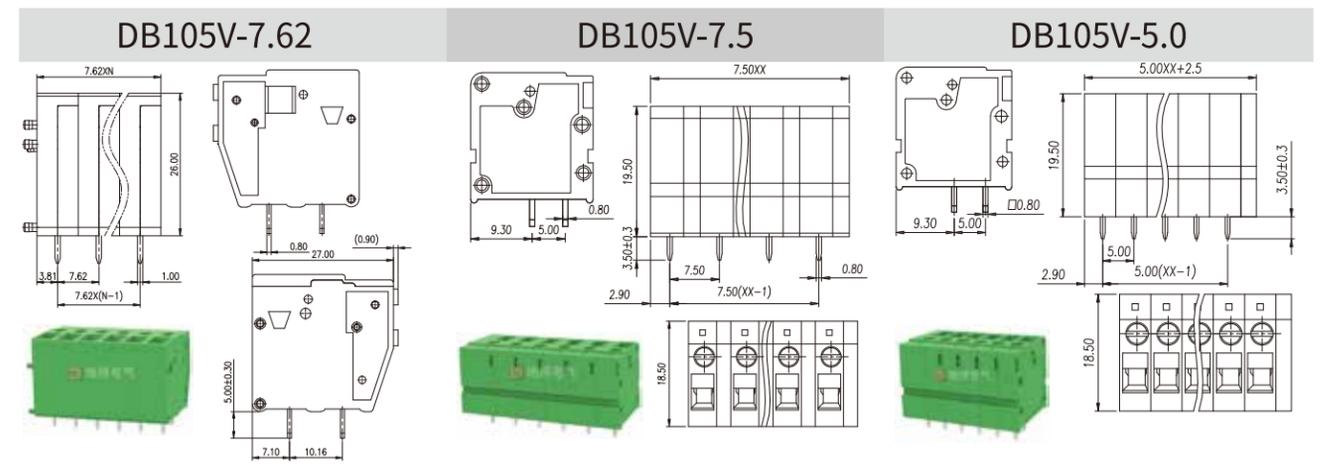


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - -	300	-	-
额定电流 Rated Current [A]	30 - -	30	-	-
接线范围 Wire Range	单/多芯线 Solid/Stranded [AWG]	26-10		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3.0/0.5		

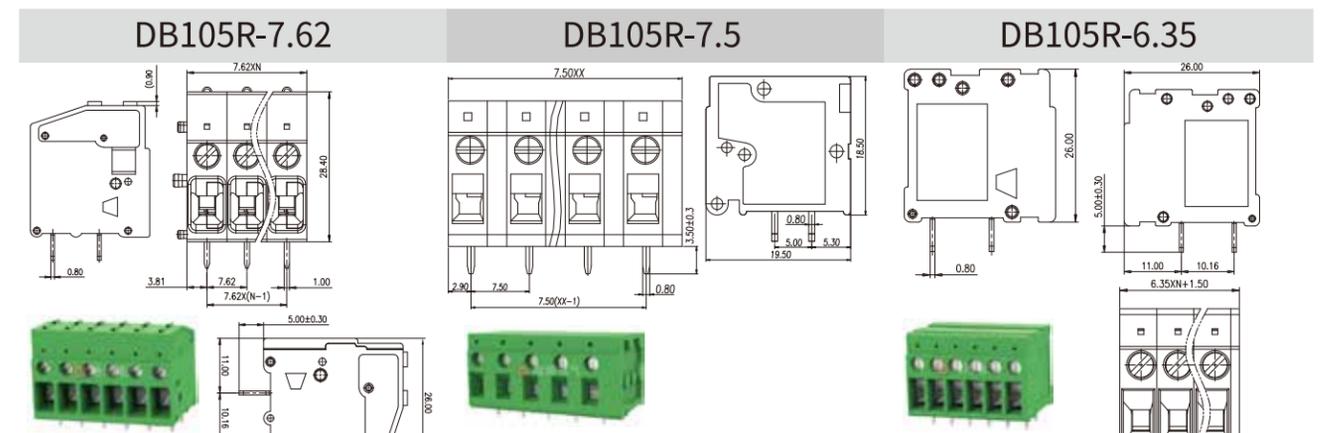


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	20 - 10	20	-	10
接线范围 Wire Range	单/多芯线 Solid/Stranded [AWG]	26-10		
间距 Pitch [mm]		6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3.0/0.5		

# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

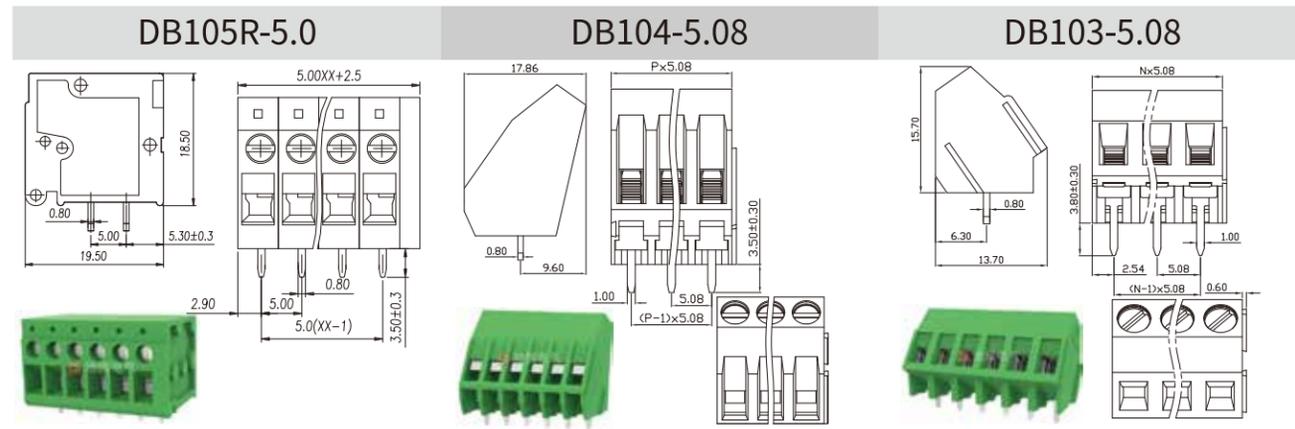


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		16	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

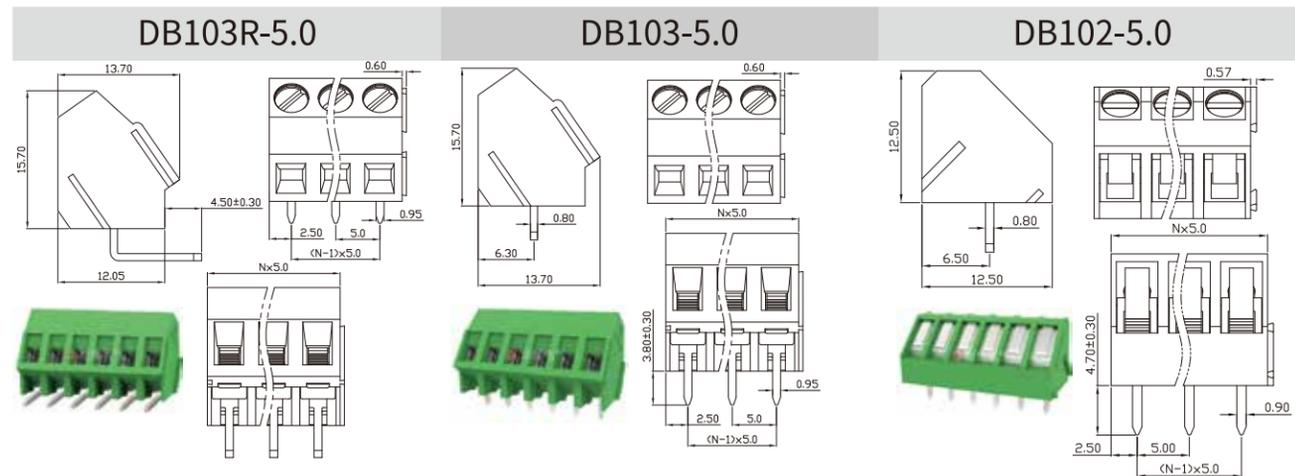


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		26-10		
单/多芯线 Solid/Stranded [AWG]		26-10		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

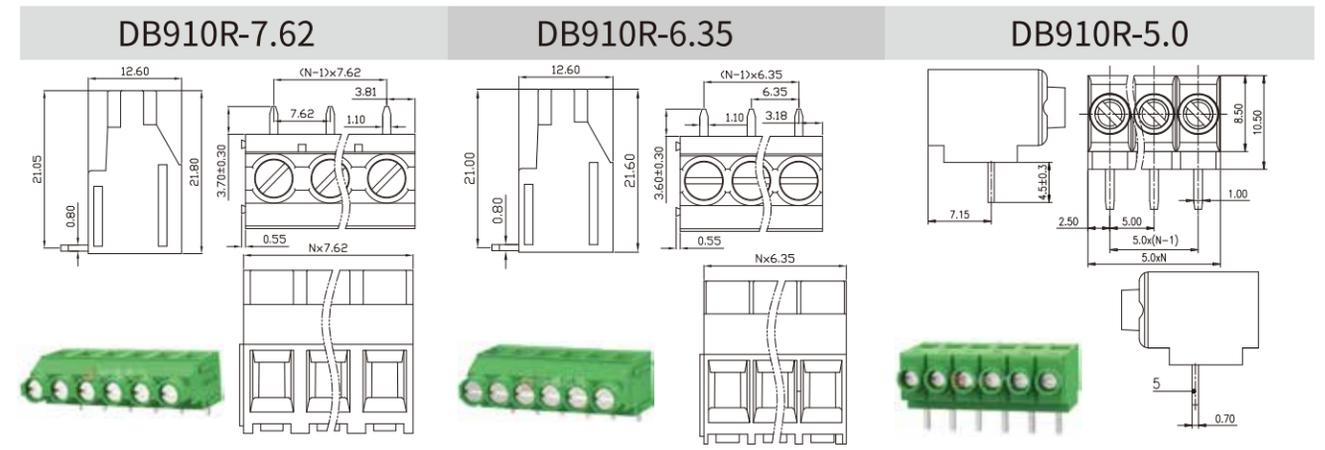

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

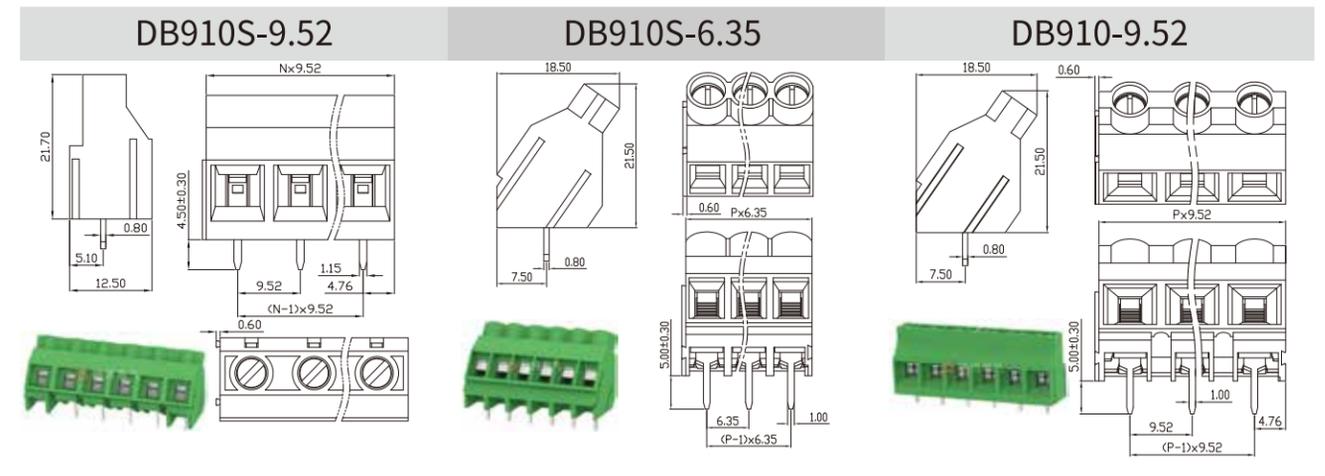


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		26-10		
单/多芯线 Solid/Stranded [AWG]		26-10		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	50
接线范围 Wire Range		26-10		
单/多芯线 Solid/Stranded [AWG]		26-10		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		26-10		
单/多芯线 Solid/Stranded [AWG]		26-10		
间距 Pitch [mm]		6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		


DB910-7.62

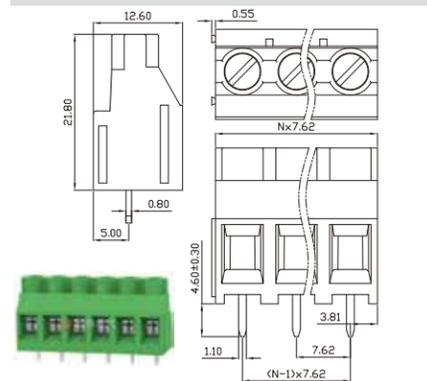


DB910-7.5

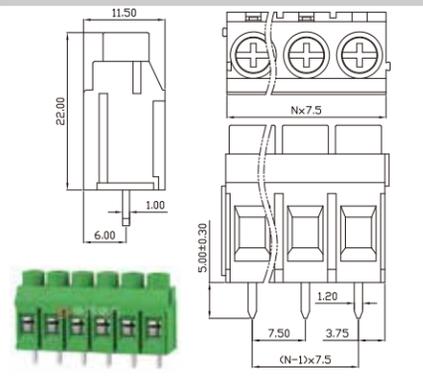


DB910-6.35

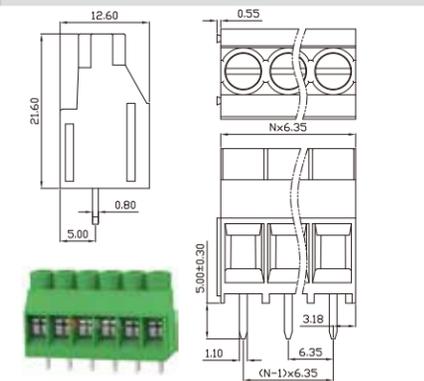


DB910VA-10.16

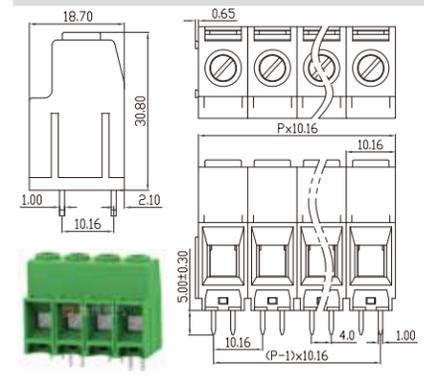

DB910VA-6.35

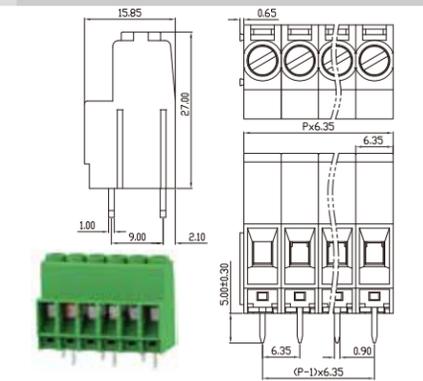

DB910RF-7.5

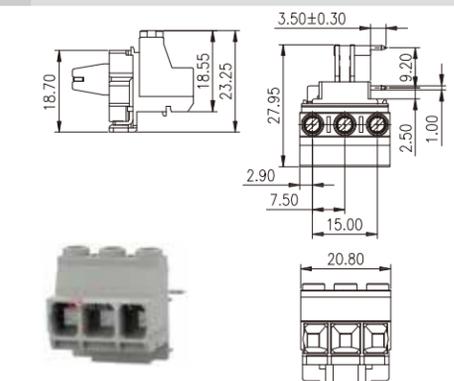

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3.0/0.5		


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	300
额定电流 Rated Current [A]		20	20	5
接线范围 Wire Range		30-12		
单/多芯线 Solid/Stranded [AWG]		30-12		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.6		


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		


DB910-5.0

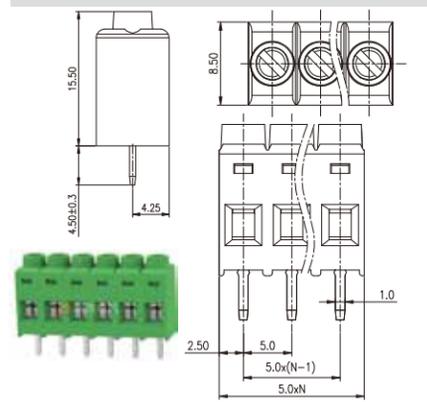


DB910A-9.52

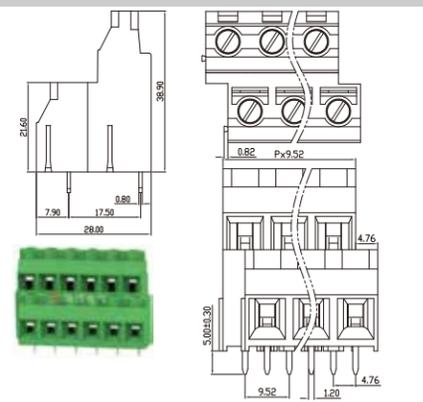


DB910A-6.35

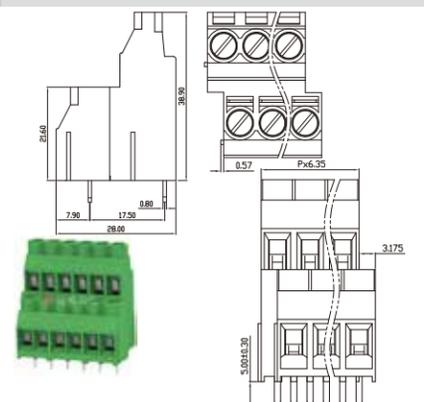


DB910LF-7.5

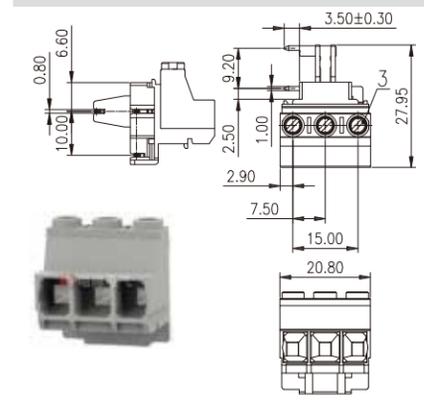

DB930-9.52

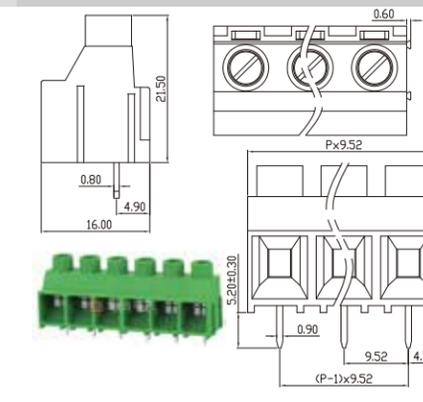

DB930A-9.52

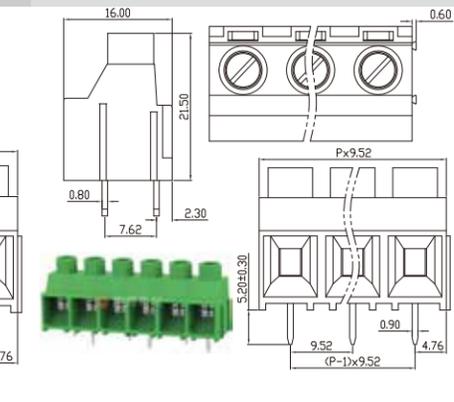




# 螺钉式接线端子 Screw terminal block

# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		9.52		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	300
额定电流 Rated Current [A]		100	-	10
接线范围 Wire Range		18-3		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		19.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M5.0/2.0		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	-
额定电流 Rated Current [A]		160	160	-
接线范围 Wire Range		26-2/0		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		17.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M6/5.5		

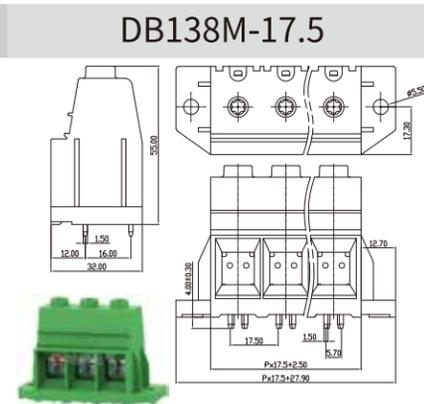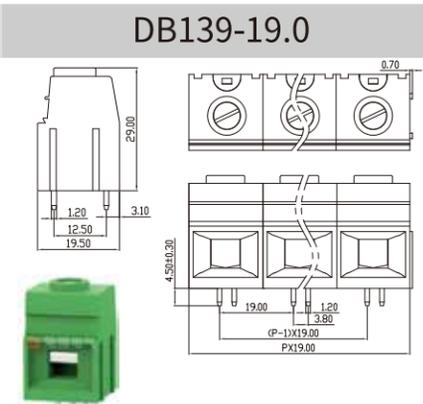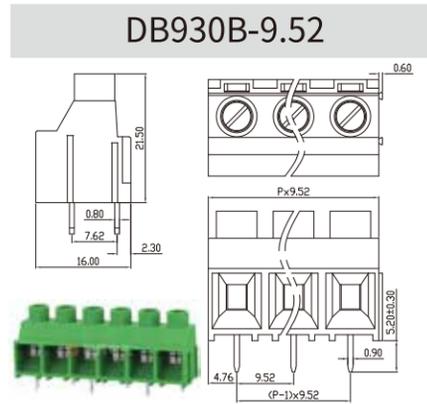

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	-
额定电流 Rated Current [A]		160	160	-
接线范围 Wire Range		26-2/0		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		17.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M6/5.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	600
额定电流 Rated Current [A]		115	-	5
接线范围 Wire Range		20-2		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		15.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M5/2.0		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	600
额定电流 Rated Current [A]		115	-	5
接线范围 Wire Range		20-2		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		15.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M5/2.0		

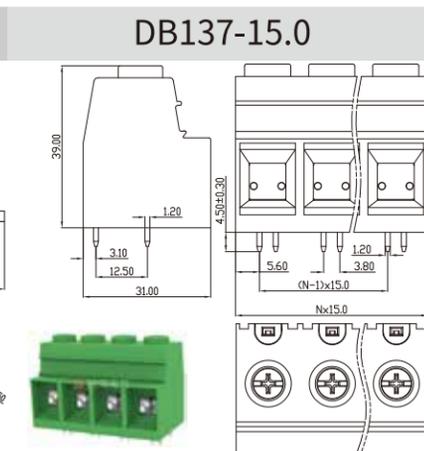
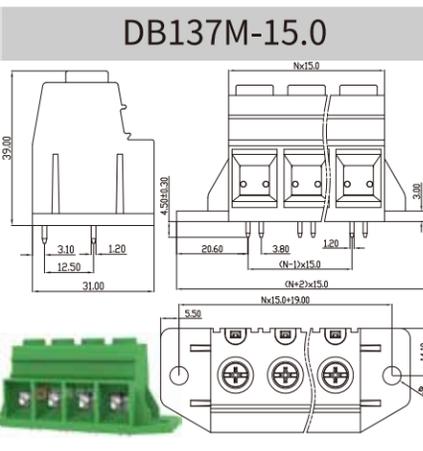
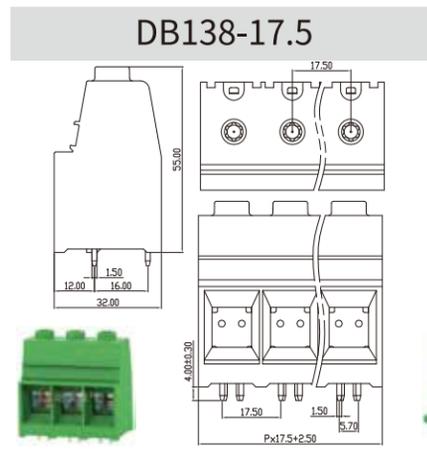


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	-
额定电流 Rated Current [A]		65	-	-
接线范围 Wire Range		20-6		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	-
额定电流 Rated Current [A]		65	-	-
接线范围 Wire Range		20-6		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	300
额定电流 Rated Current [A]		65	-	10
接线范围 Wire Range		26-6		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		12.7		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

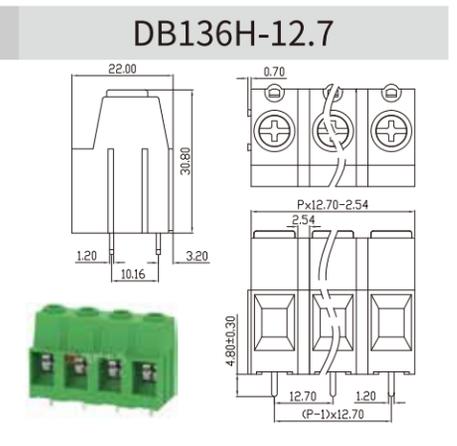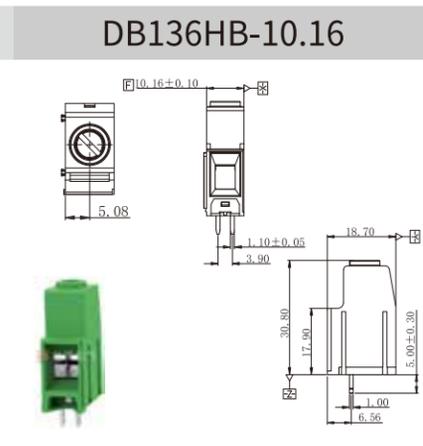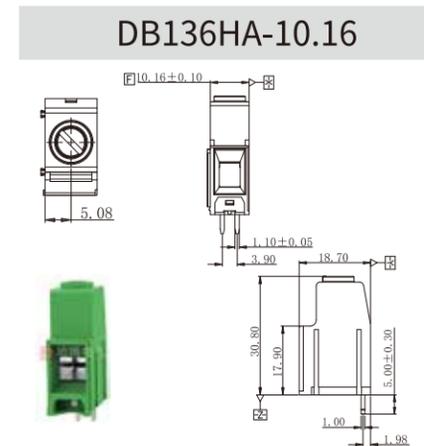

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	300
额定电流 Rated Current [A]		65	-	10
接线范围 Wire Range		26-6		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	-	300
额定电流 Rated Current [A]		65	-	10
接线范围 Wire Range		26-6		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		52	-	5
接线范围 Wire Range		20-6		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

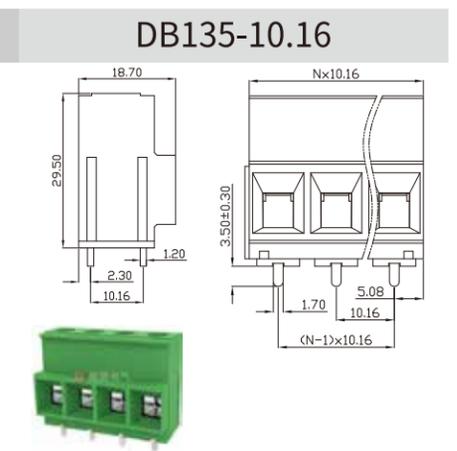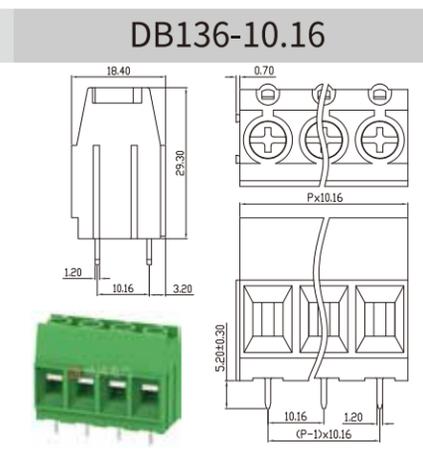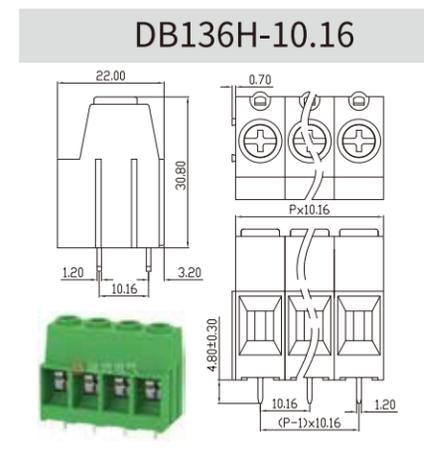


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	65	-	10
接线范围 Wire Range	26-6		
单/多芯线 Solid/Stranded [AWG]	26-6		
间距 Pitch [mm]	12.7		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4.0/1.2		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	65	-	10
接线范围 Wire Range	26-6		
单/多芯线 Solid/Stranded [AWG]	26-6		
间距 Pitch [mm]	12.7		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4.0/1.2		


UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	65	-	10
接线范围 Wire Range	20-6		
单/多芯线 Solid/Stranded [AWG]	20-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

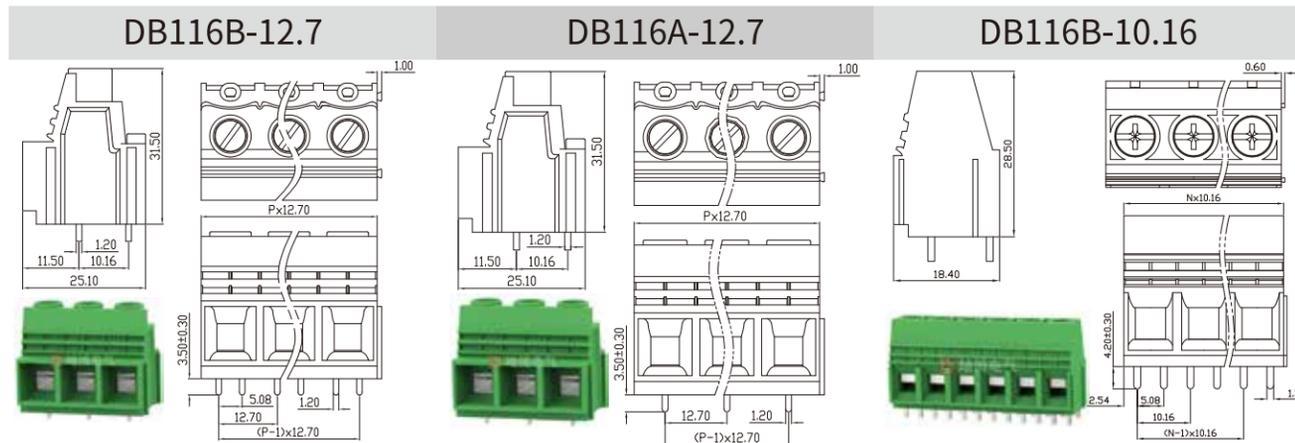

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	65	-	5
接线范围 Wire Range	20-6		
单/多芯线 Solid/Stranded [AWG]	20-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	20	20	10
接线范围 Wire Range	26-12		
单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

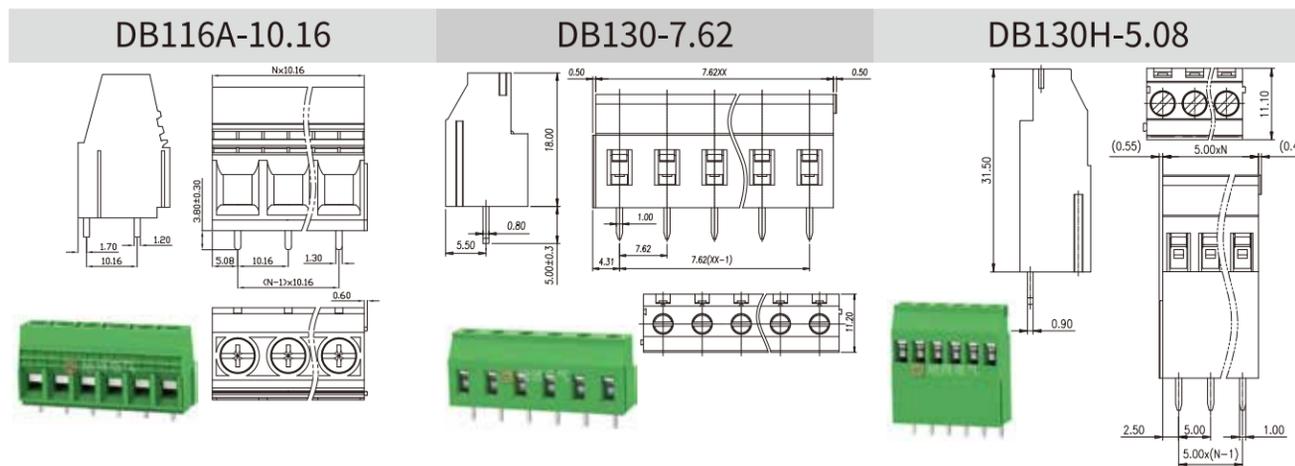


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	26-12		
单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	26-12		
单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	26-12		
单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

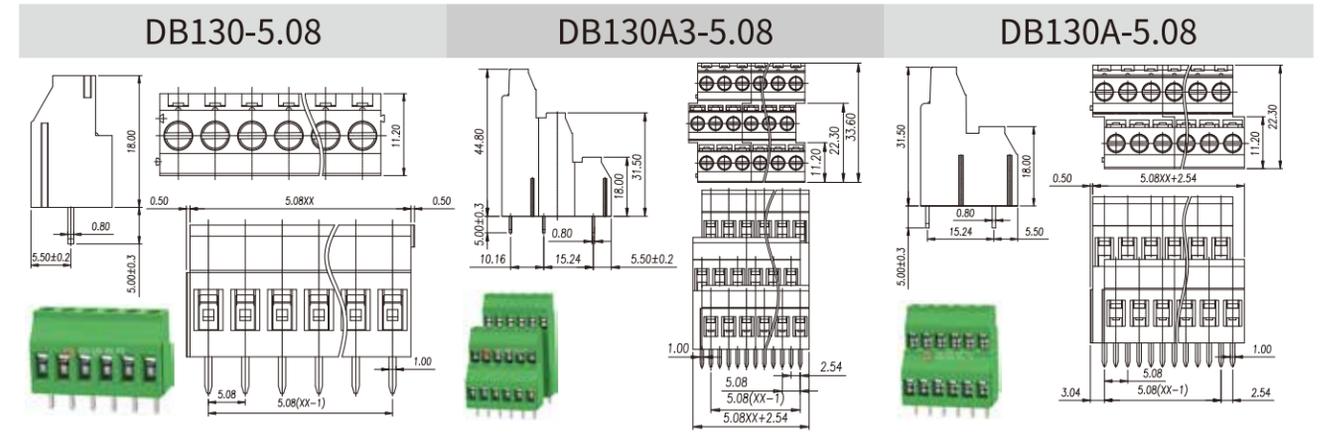

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	26-12		
单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	26-12		
单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	0.2-2.5		
单/多芯线 Solid/Stranded [AWG]	0.2-2.5		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.6		

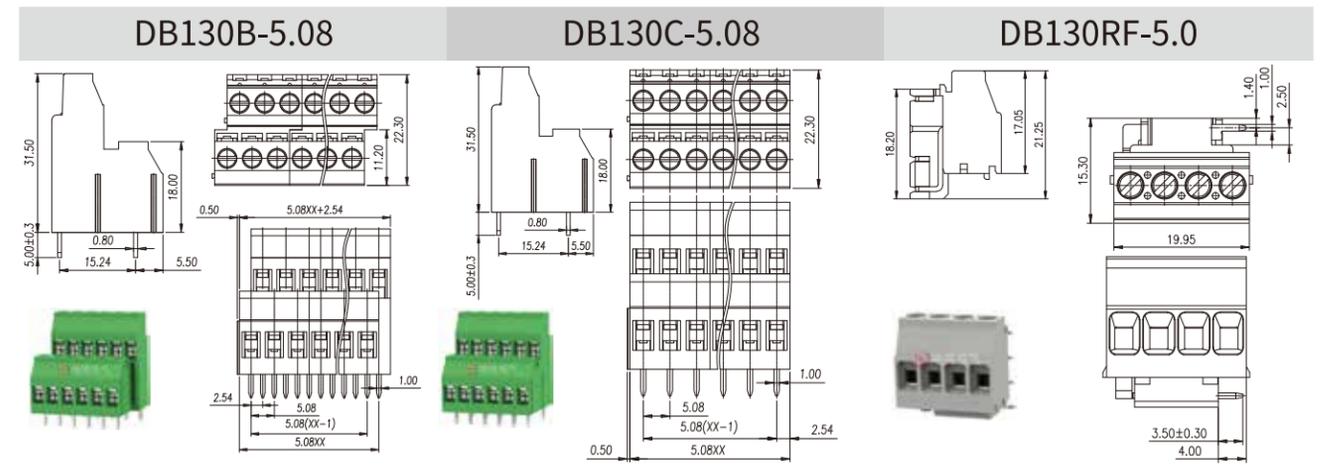


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	20 - 10	20	-	10
接线范围 Wire Range	0.2-2.5	0.2-2.5		
单/多芯线 Solid/Stranded [AWG]		0.2-2.5		
间距 Pitch [mm]	5.0	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.6	M3/0.6		

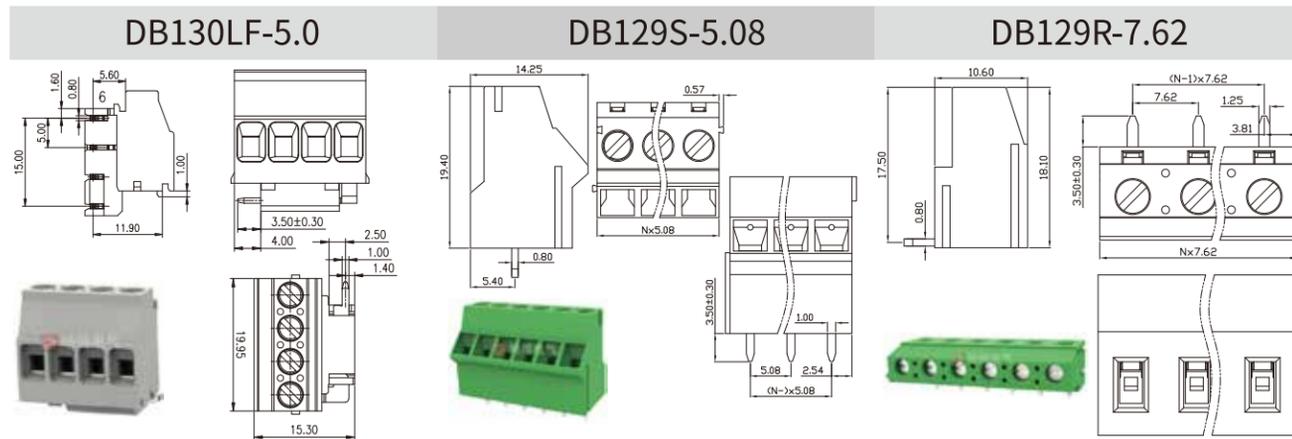


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	20 - 10	20	-	10
接线范围 Wire Range	22-12	22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]	7.5	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5	M3/0.5		

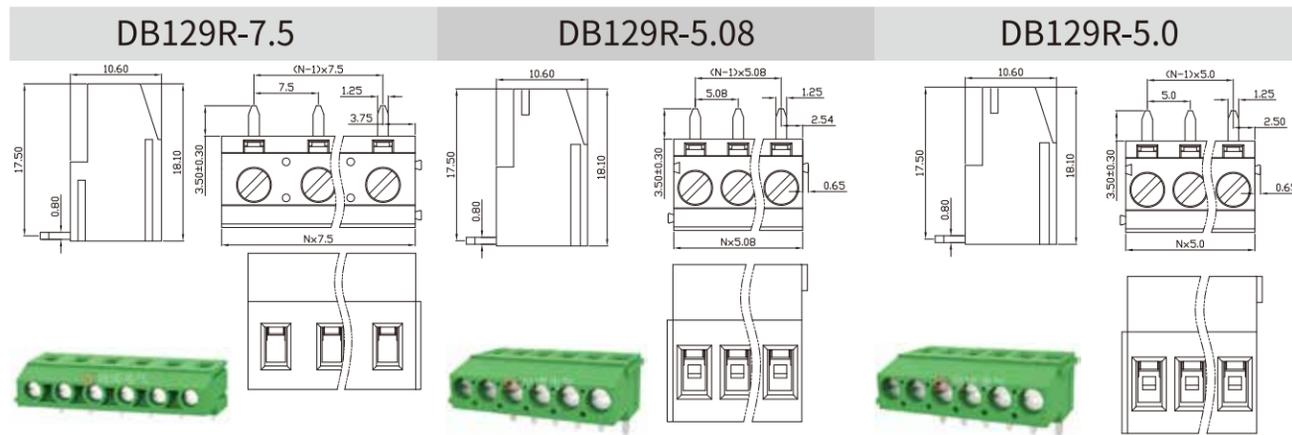


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	20 - 10	20	-	10
接线范围 Wire Range	26-12	26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]	5.08	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3.0/0.5	M3.0/0.5		

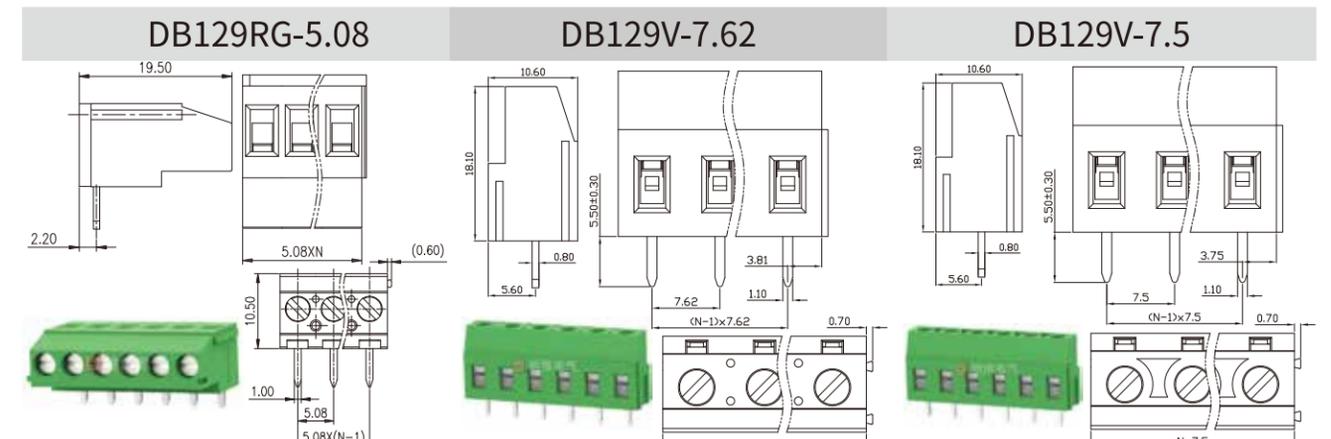


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	20 - 10	20	-	10
接线范围 Wire Range	22-12	22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]	5.08	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5	M3/0.5		

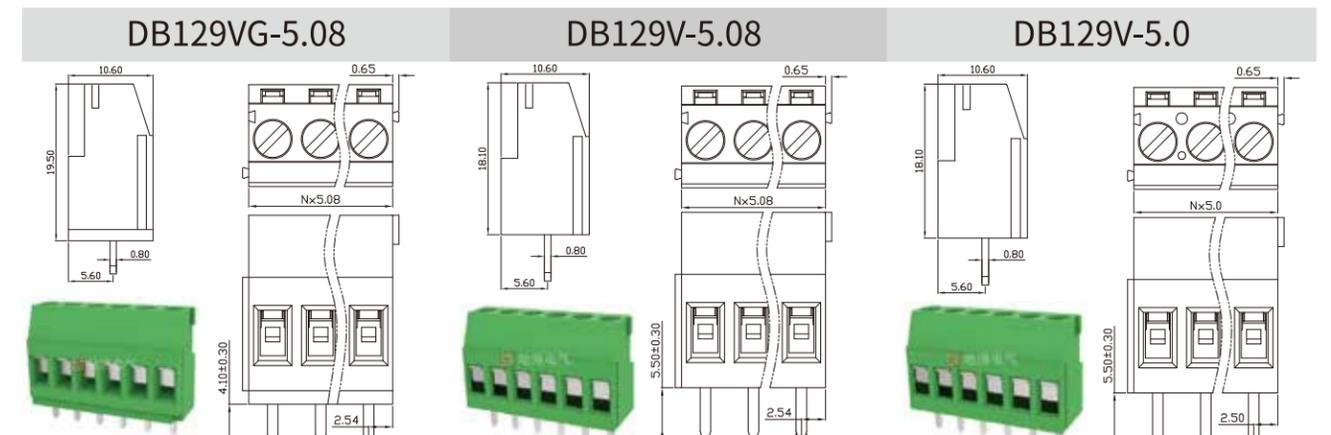


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data						
等级	Use Group	B	C	D	等级	Use Group	B	C	D	等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300	额定电压	Rated Voltage [V]	300	-	300	额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10	额定电流	Rated Current [A]	16	-	10	额定电流	Rated Current [A]	20	-	10
接线范围	Wire Range	28-12			接线范围	Wire Range	22-12			接线范围	Wire Range	22-12		
单/多芯线	Solid/Stranded [AWG]				单/多芯线	Solid/Stranded [AWG]				单/多芯线	Solid/Stranded [AWG]			
间距	Pitch [mm]	5.08			间距	Pitch [mm]	7.62			间距	Pitch [mm]	7.5		
螺丝	Screw/扭矩 Torque(Max) [N.m]	M3/0.35			螺丝	Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4			螺丝	Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

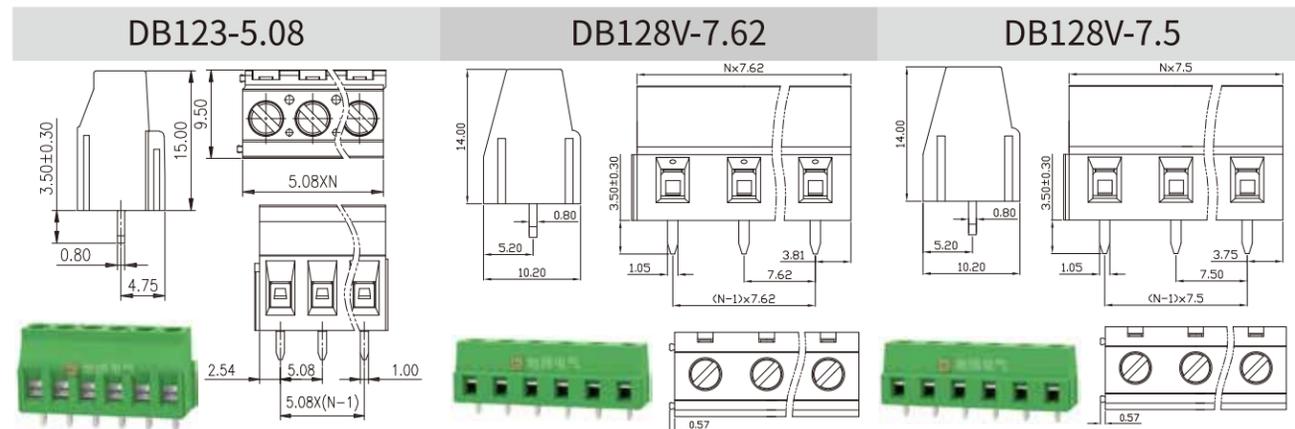


UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data						
等级	Use Group	B	C	D	等级	Use Group	B	C	D	等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300	额定电压	Rated Voltage [V]	300	-	300	额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	16	-	10	额定电流	Rated Current [A]	16	-	10	额定电流	Rated Current [A]	16	-	10
接线范围	Wire Range	22-12			接线范围	Wire Range	22-12			接线范围	Wire Range	22-12		
单/多芯线	Solid/Stranded [AWG]				单/多芯线	Solid/Stranded [AWG]				单/多芯线	Solid/Stranded [AWG]			
间距	Pitch [mm]	5.08			间距	Pitch [mm]	5.0			间距	Pitch [mm]	7.62		
螺丝	Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4			螺丝	Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4			螺丝	Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

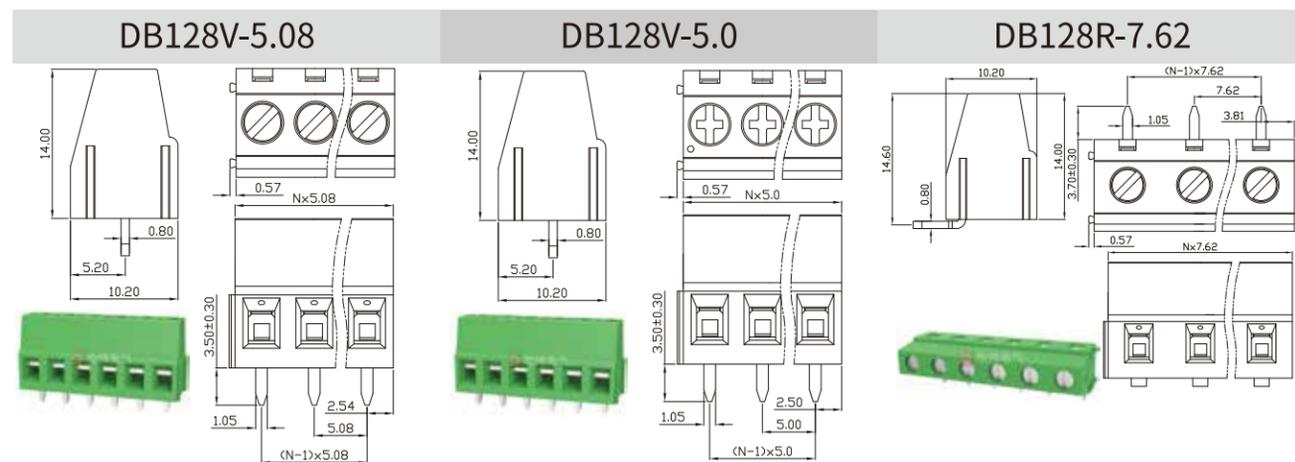


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data						
等级	Use Group	B	C	D	等级	Use Group	B	C	D	等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300	额定电压	Rated Voltage [V]	300	-	300	额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	16	-	10	额定电流	Rated Current [A]	16	-	10	额定电流	Rated Current [A]	16	-	10
接线范围	Wire Range	22-12			接线范围	Wire Range	22-12			接线范围	Wire Range	22-12		
单/多芯线	Solid/Stranded [AWG]				单/多芯线	Solid/Stranded [AWG]				单/多芯线	Solid/Stranded [AWG]			
间距	Pitch [mm]	7.5			间距	Pitch [mm]	5.08			间距	Pitch [mm]	5.0		
螺丝	Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4			螺丝	Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4			螺丝	Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

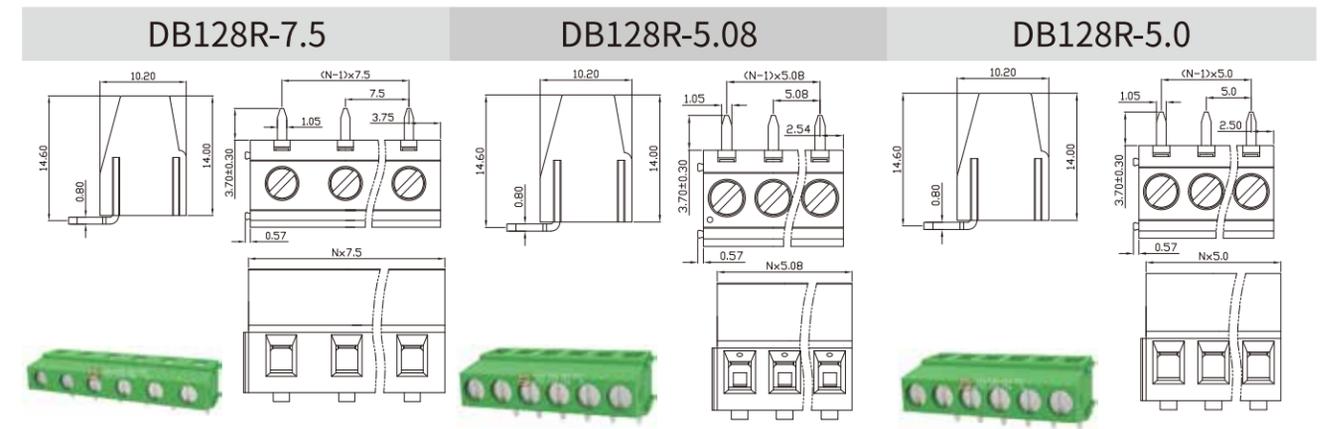


UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data						
等级	Use Group	B	C	D	等级	Use Group	B	C	D	等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300	额定电压	Rated Voltage [V]	300	-	300	额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	16	-	10	额定电流	Rated Current [A]	16	-	10	额定电流	Rated Current [A]	16	-	10
接线范围	Wire Range	22-12			接线范围	Wire Range	22-12			接线范围	Wire Range	22-12		
单/多芯线	Solid/Stranded [AWG]				单/多芯线	Solid/Stranded [AWG]				单/多芯线	Solid/Stranded [AWG]			
间距	Pitch [mm]	5.08			间距	Pitch [mm]	5.0			间距	Pitch [mm]	5.0		
螺丝	Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4			螺丝	Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4			螺丝	Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

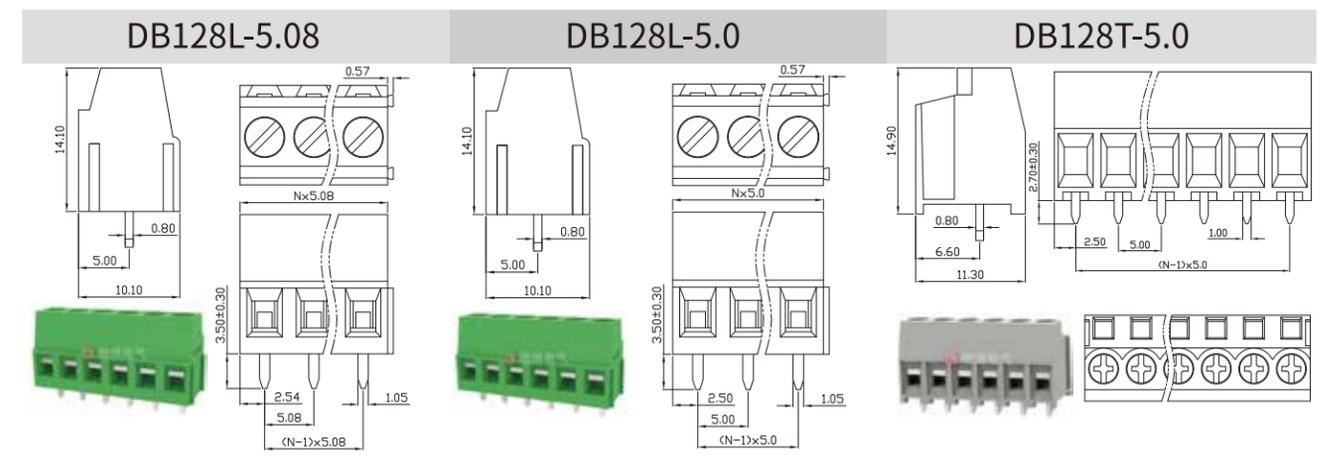


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	10 - 10	10	-	10
接线范围 Wire Range	22-12	22-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	5.08	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4	M2.5/0.4		

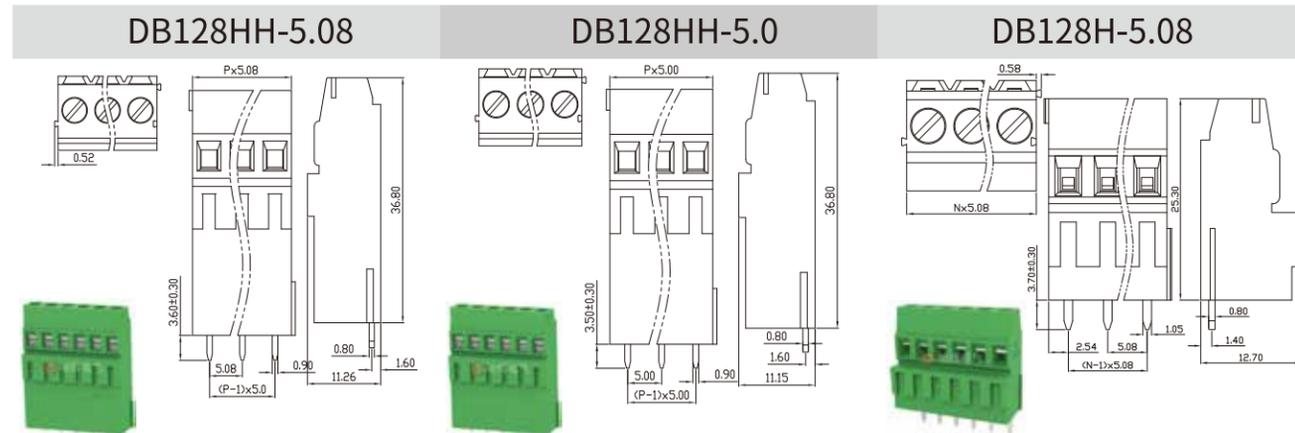


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	16 - 10	16	-	10
接线范围 Wire Range	22-12	22-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	5.0	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4	M2.5/0.4		

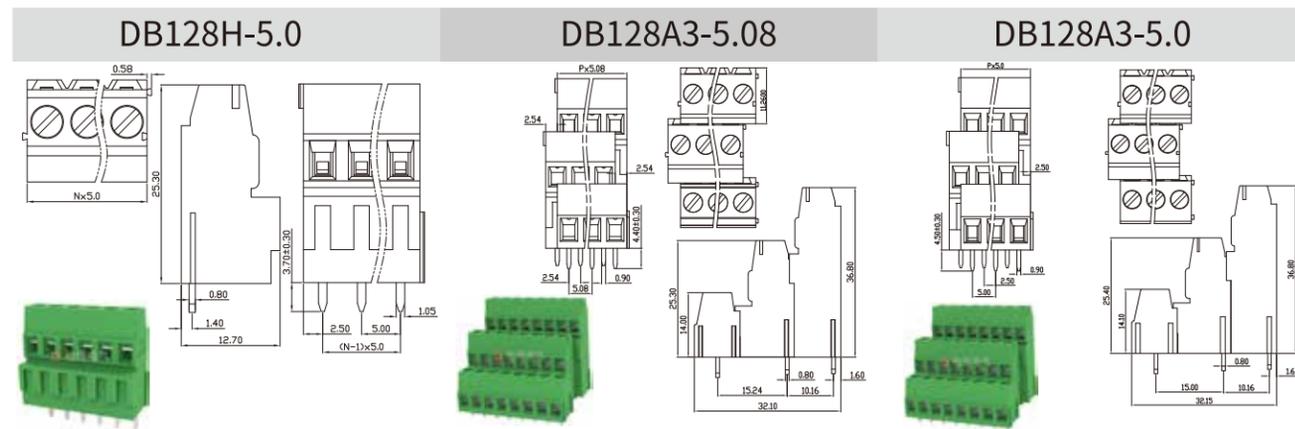


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	10 - 10	10	-	10
接线范围 Wire Range	22-12	22-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	5.08	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4	M2.5/0.4		

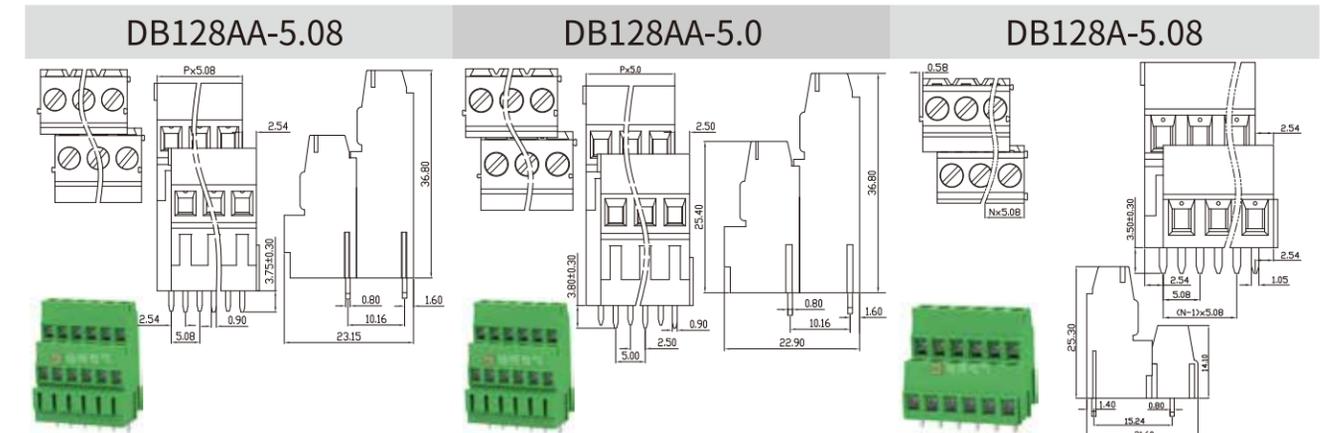

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	16 - 10	16	-	10
接线范围 Wire Range	22-12	22-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	5.0	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4	M2.5/0.4		



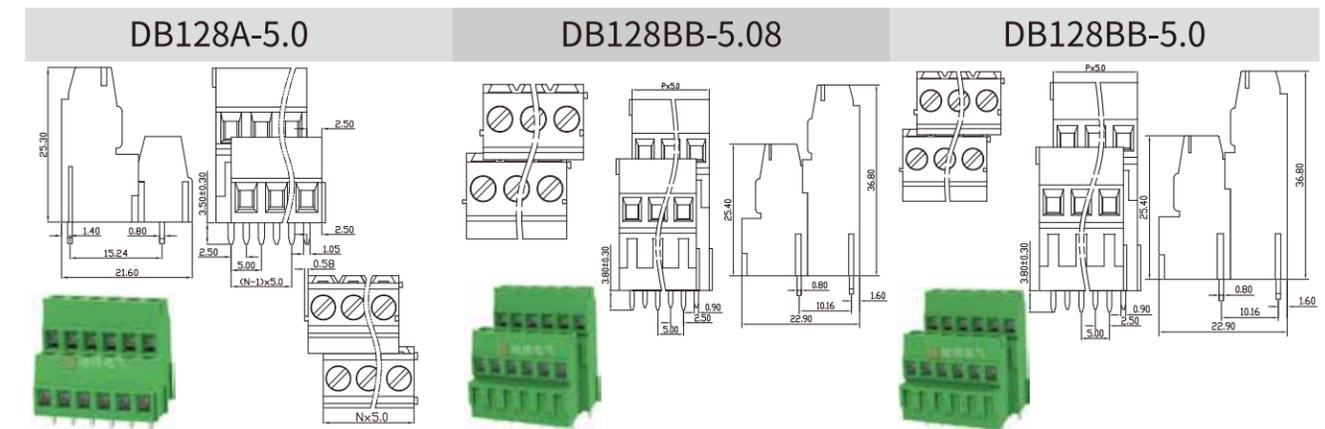


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		16	-	2.0
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		16	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		12	-	-
接线范围 Wire Range		26-14		
单/多芯线 Solid/Stranded [AWG]		26-14		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.50		

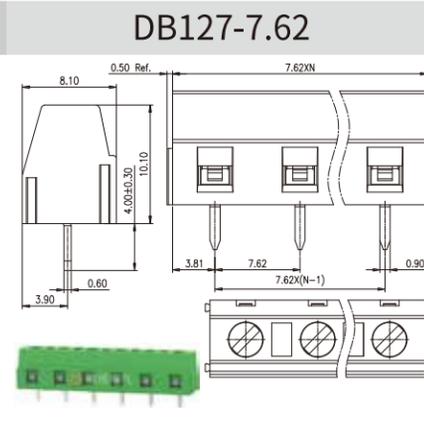
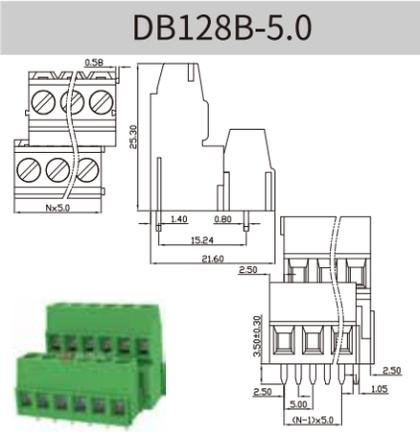
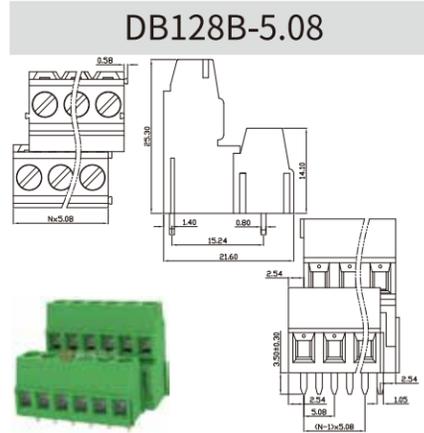


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		26-14		
单/多芯线 Solid/Stranded [AWG]		26-14		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		12-10		
单/多芯线 Solid/Stranded [AWG]		12-10		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.35		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		26-14		
单/多芯线 Solid/Stranded [AWG]		26-14		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

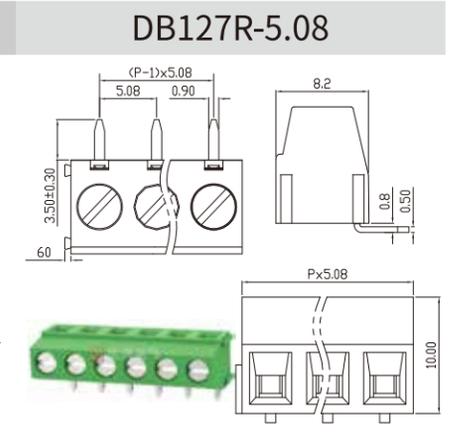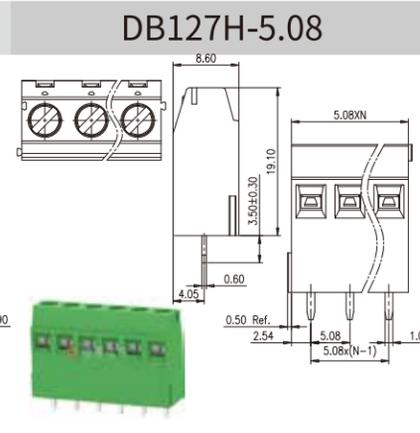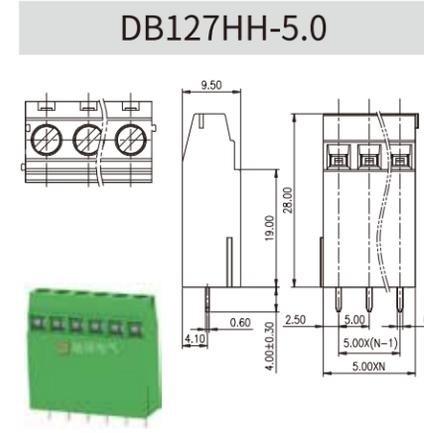

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		26-14		
单/多芯线 Solid/Stranded [AWG]		26-14		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		







UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		26-14		
单/多芯线 Solid/Stranded [AWG]		26-14		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		26-14		
单/多芯线 Solid/Stranded [AWG]		26-14		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		26-14		
单/多芯线 Solid/Stranded [AWG]		26-14		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M.3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		26-14		
单/多芯线 Solid/Stranded [AWG]		26-14		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

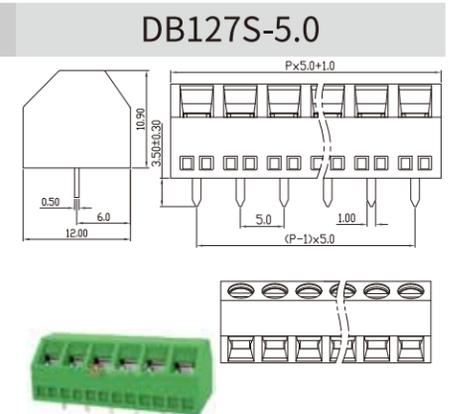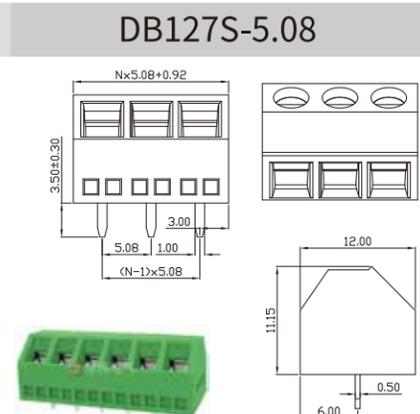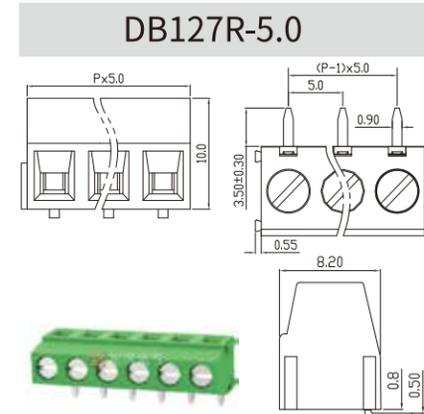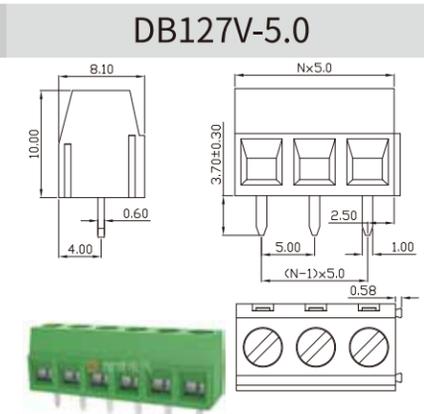
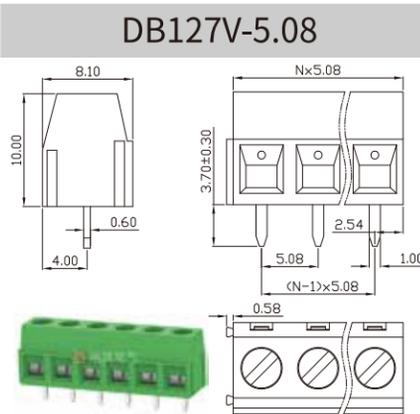
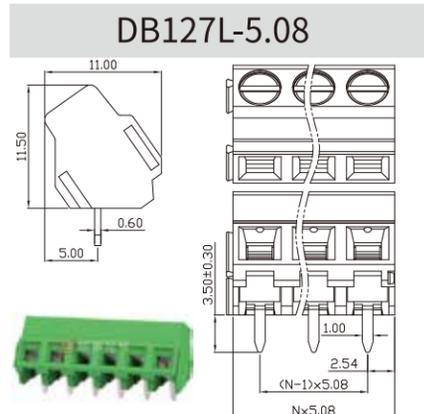


# 螺钉式接线端子 Screw terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		26-16		
单/多芯线 Solid/Stranded [AWG]		26-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		26-16		
单/多芯线 Solid/Stranded [AWG]		26-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		



UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		26-14		
单/多芯线 Solid/Stranded [AWG]		26-14		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

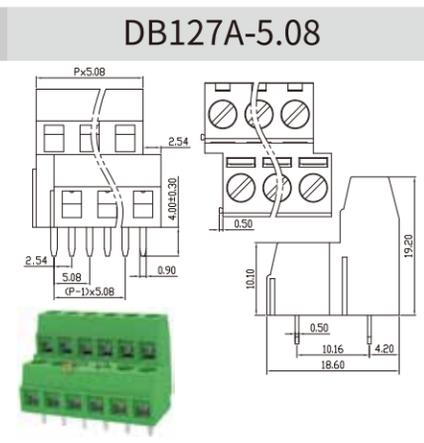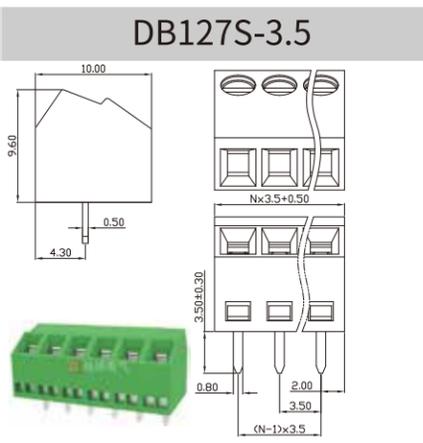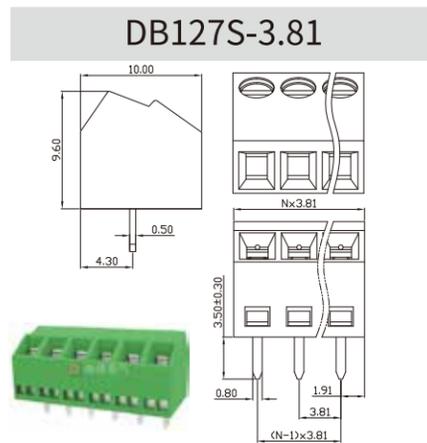

UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		26-14		
单/多芯线 Solid/Stranded [AWG]		26-14		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		26-14		
单/多芯线 Solid/Stranded [AWG]		26-14		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		


UL/CUL 技术参数 UL/CUL Technical Data		cUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

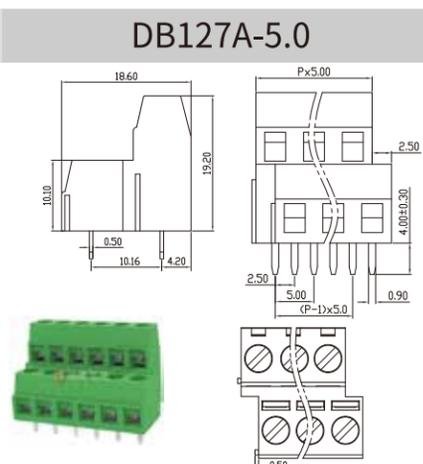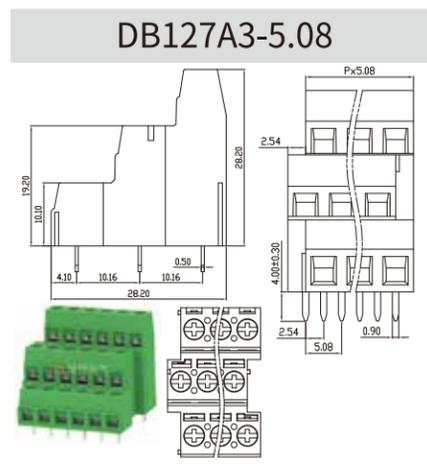

## Plug-In terminal block

# 插拔式接线端子

Pluggable terminal block are used to connect wires and printed circuit boards, allowing for easy and safe transmission of signals, data, and power. Needle pitch from 2.5 mm to 15 mm, current The strength can reach 125 A, and our XS to XL COMBICON range always provides the correct solution for your equipment or control cabinet design. Supports multiple The connection method and installation method are highly flexible and suitable for all applications. The product design complies with international standards such as IEC60998 and UL1059. ObtainedUL certified in the United States.



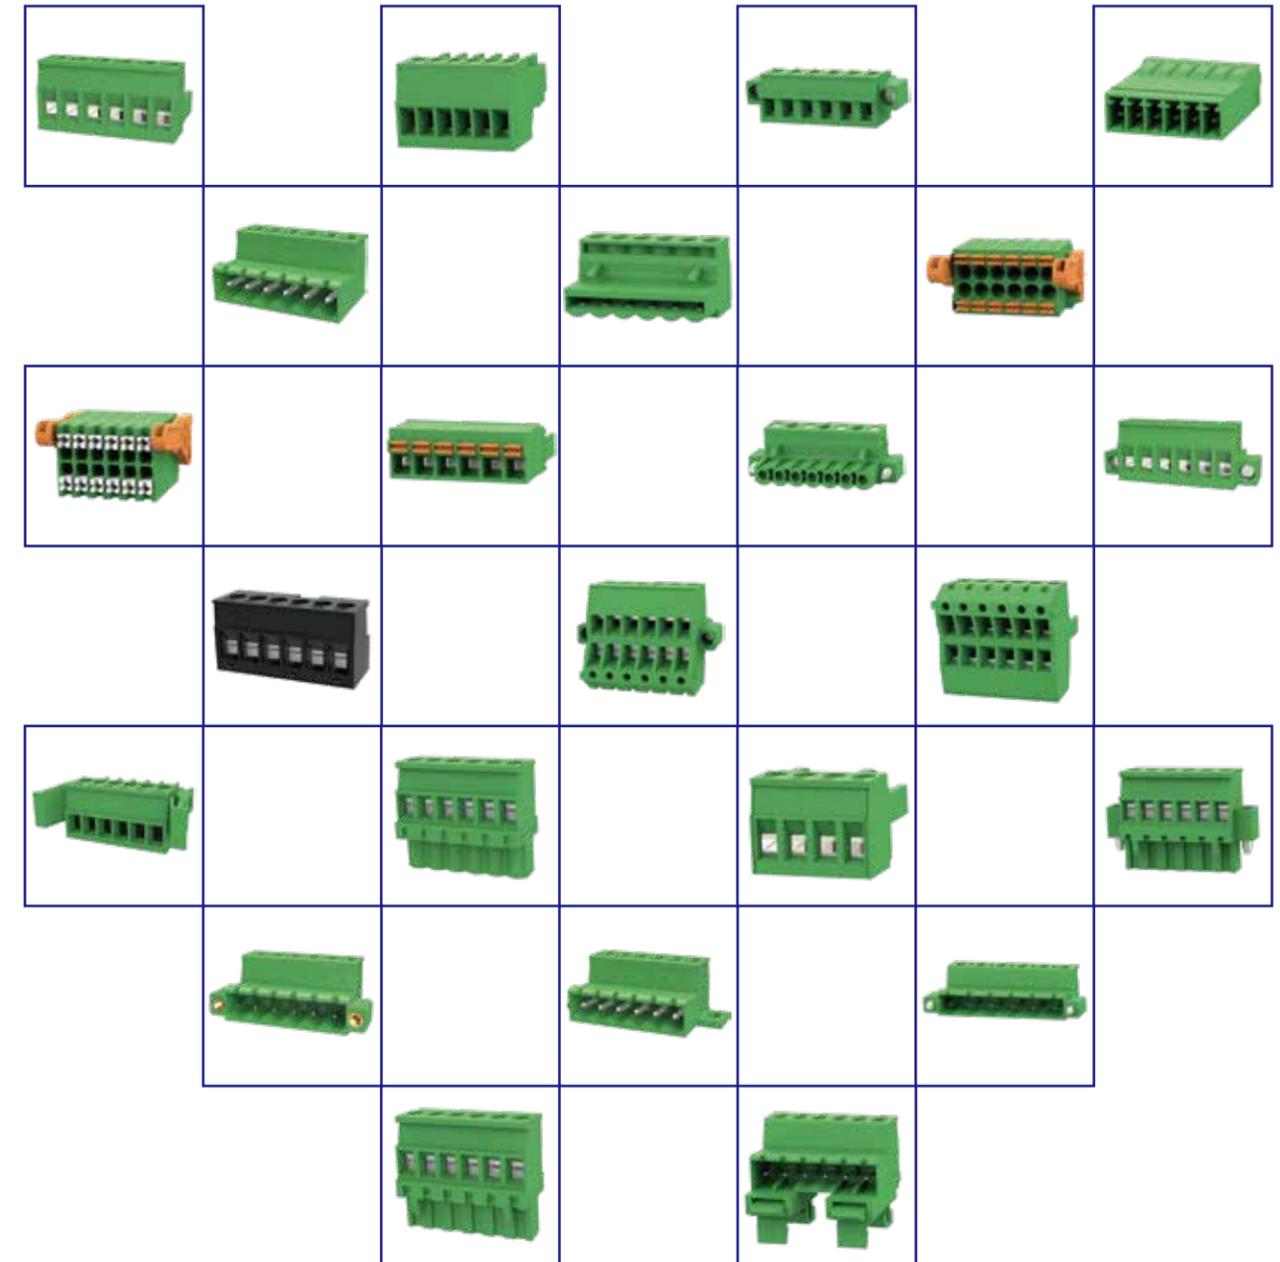


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	10	-	-
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		




UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

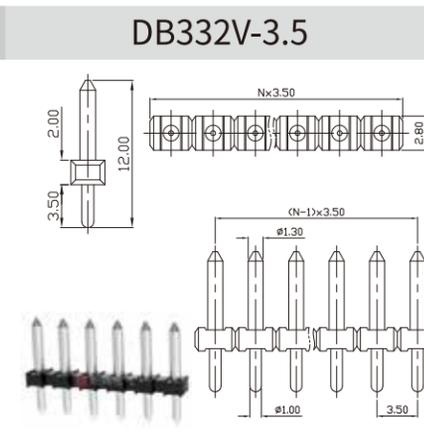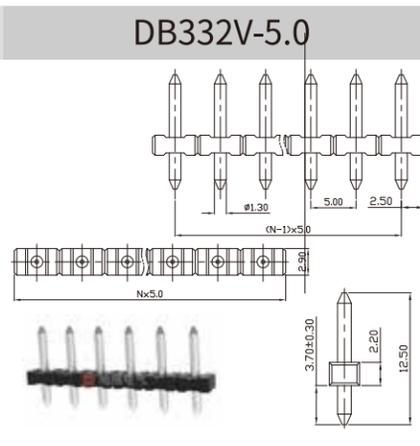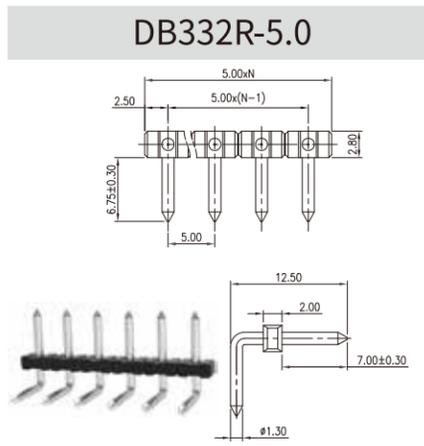

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	22-14		
单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	250
额定电流 Rated Current [A]	12	-	14
接线范围 Wire Range	22-14		
单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	22-14		
单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

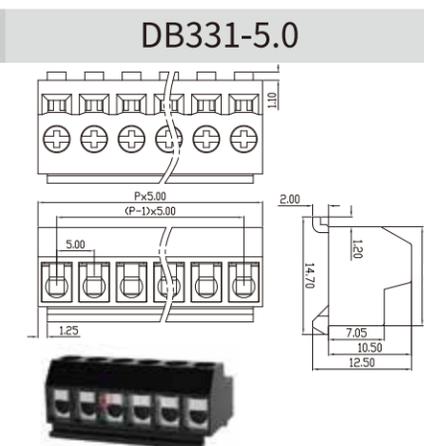
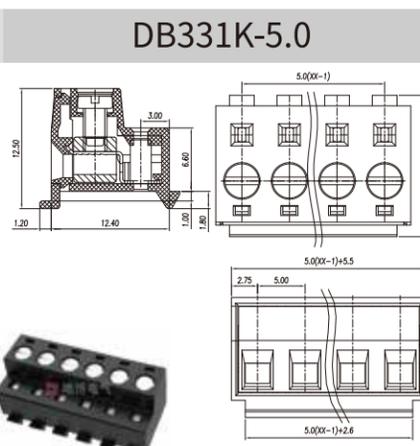
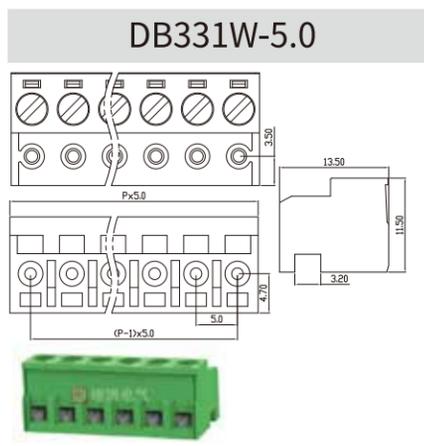


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.2		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	250
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		




UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	26-16		
单/多芯线 Solid/Stranded [AWG]	26-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	0.2		

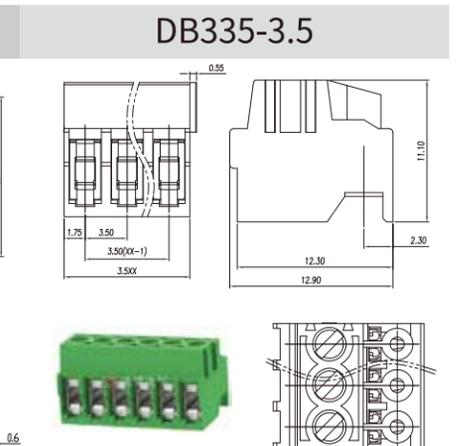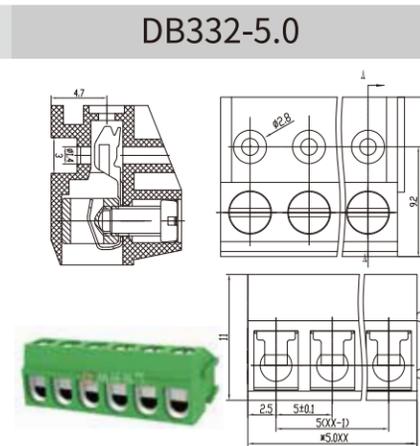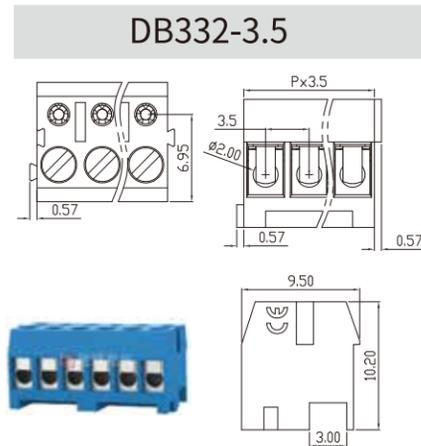

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	15
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	300
额定电流 Rated Current [A]	65	65	5
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

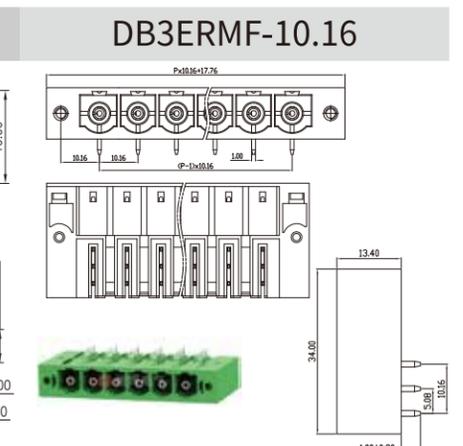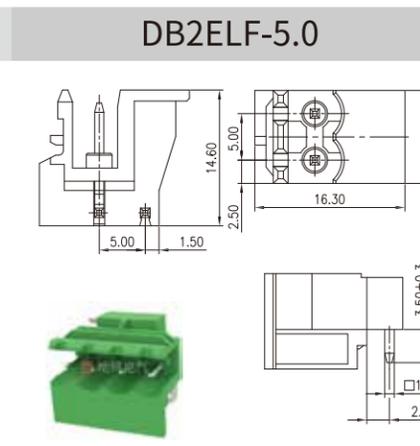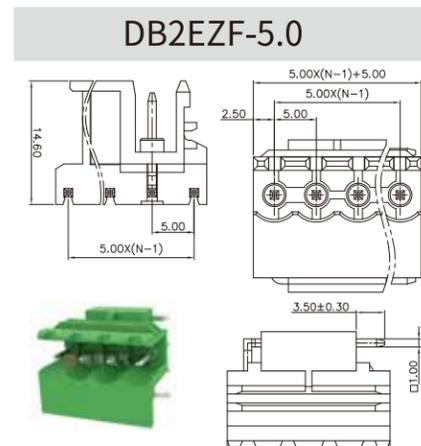


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	300
额定电流 Rated Current [A]		65	65	5
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


DB3ERCF-10.16

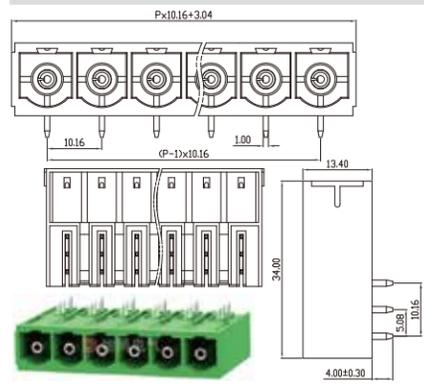

DB3ERC-10.16

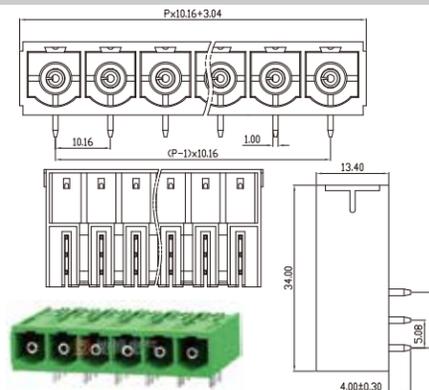


DB3ERM-10.16

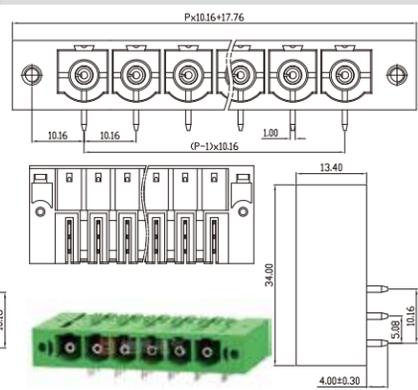


UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	300
额定电流 Rated Current [A]		65	65	5
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


DB3EVM-10.16

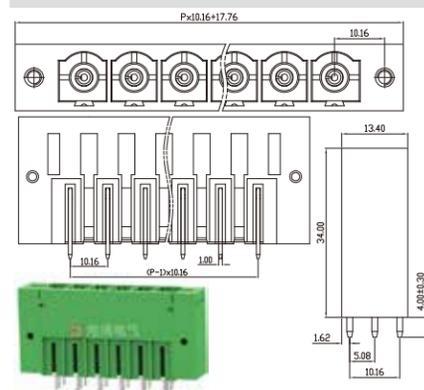

DB3EVC-10.16

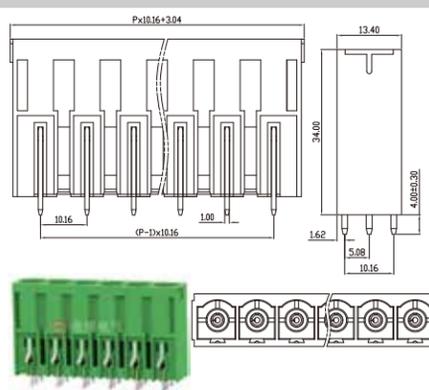


DB3CM-7.62

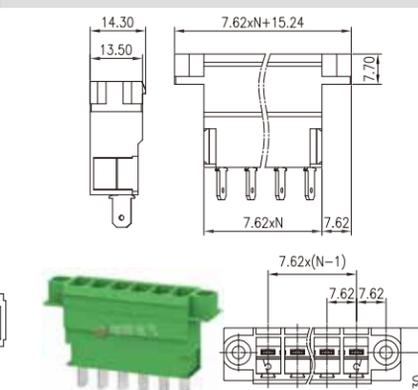


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	300
额定电流 Rated Current [A]		42	42	5
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


DB3ERL-7.62

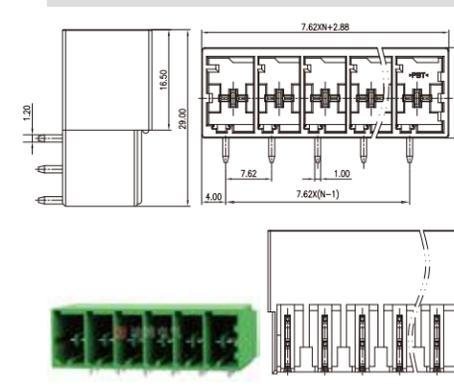

DB3EVL-7.62

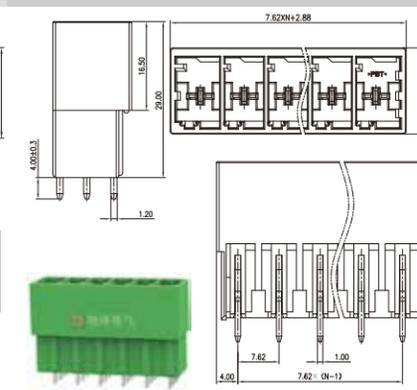


DB3EVM-7.62

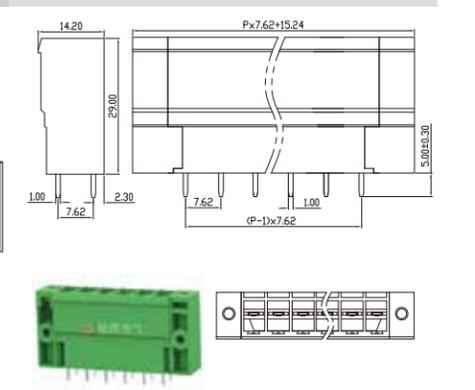


UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


DB3EVC-7.62

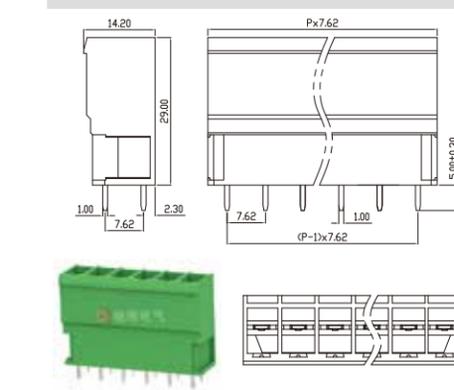

DB3ERM-7.62

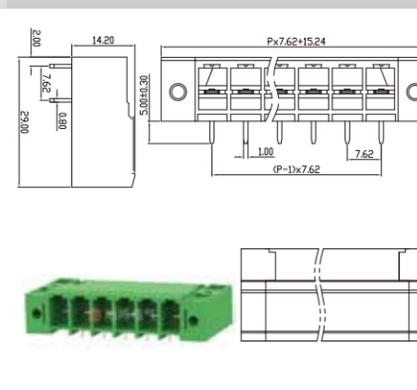

DB3ERC-7.62

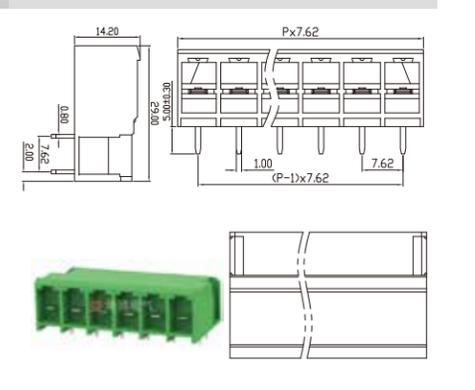






# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	7.05			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.08			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			




UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

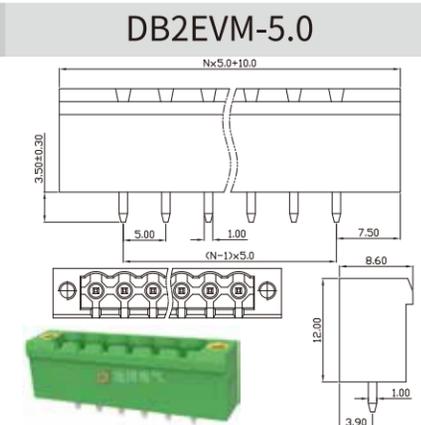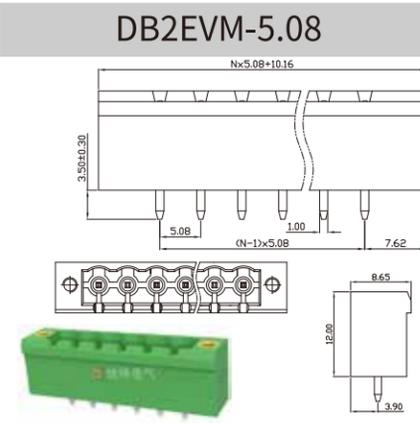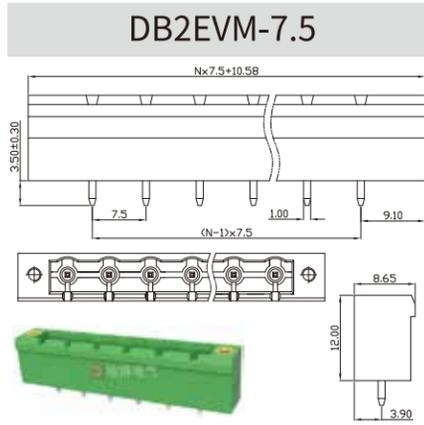

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 8	8	-	8
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	3.81			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 8	8	-	8
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	3.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.08			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

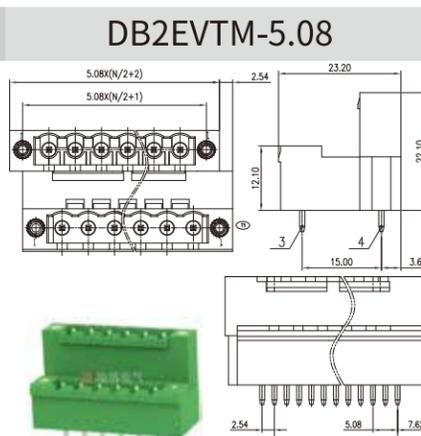
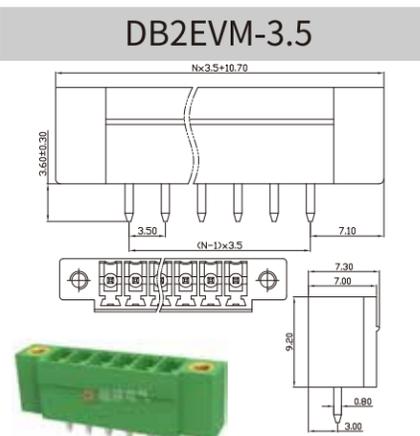
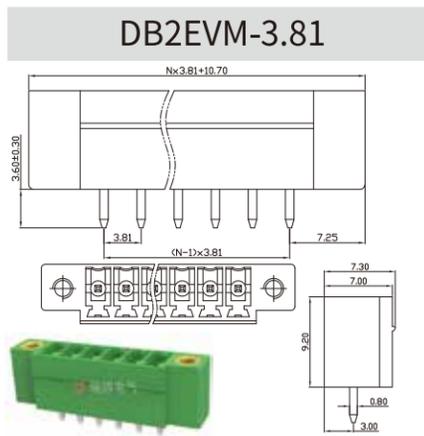


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.08			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.08			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			




UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.08			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

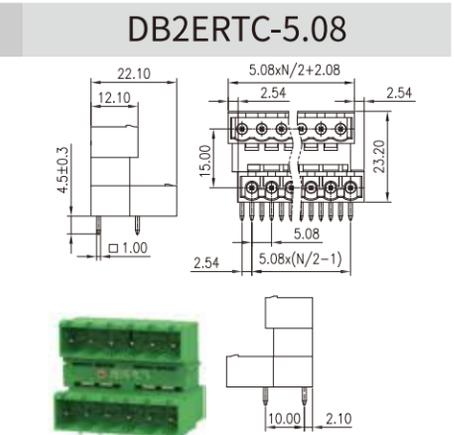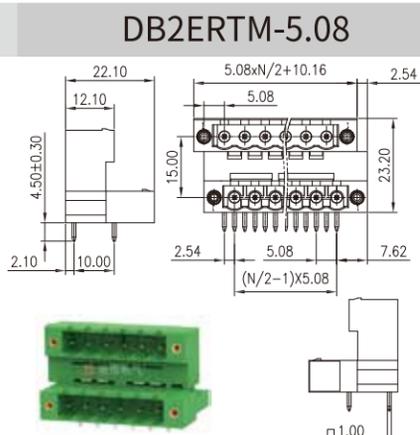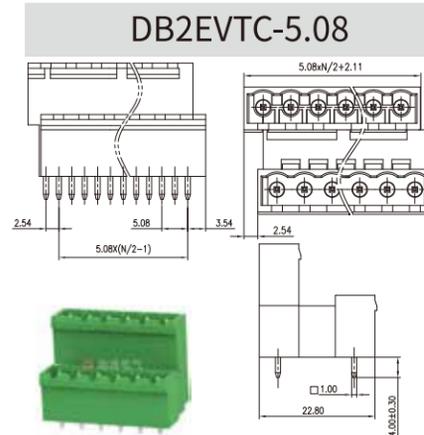

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.08			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.08			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 10	8	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	3.81			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

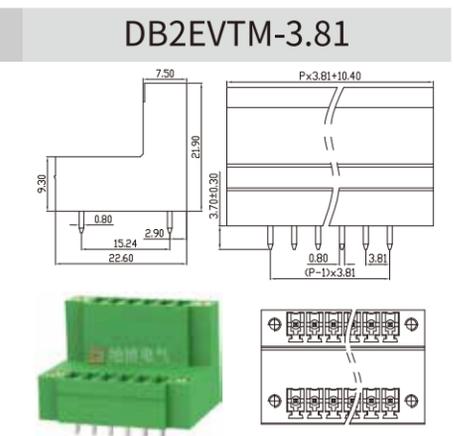
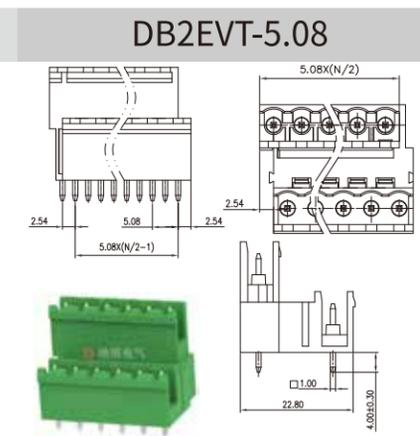
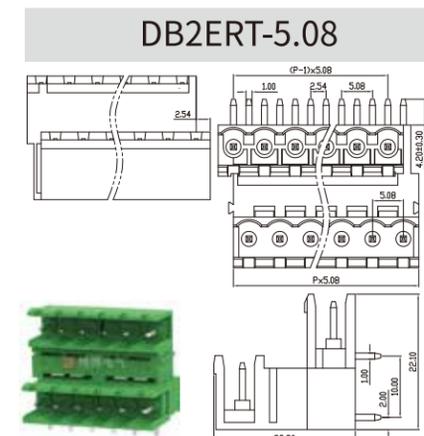


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

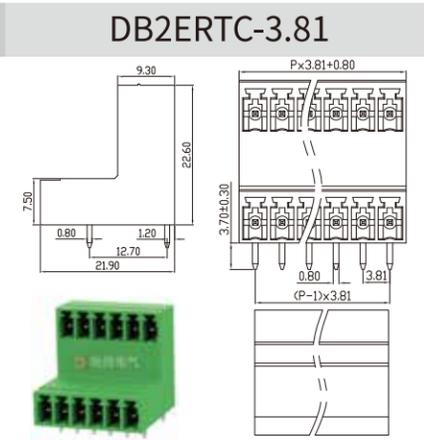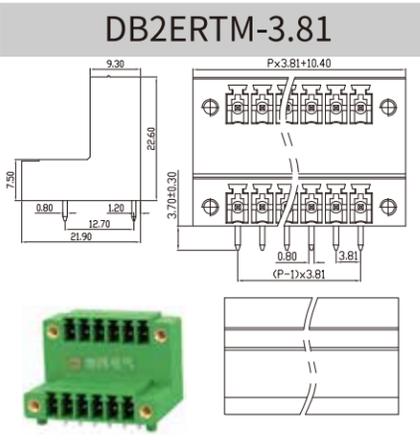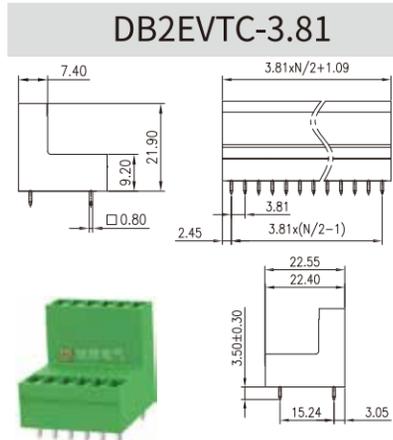

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

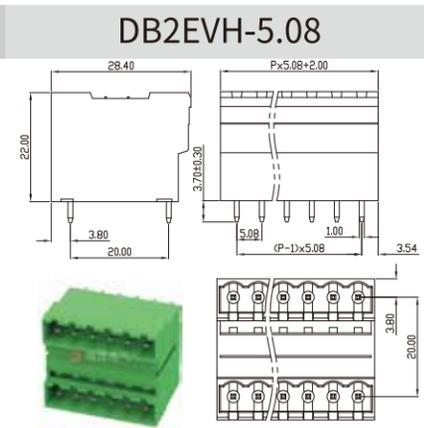
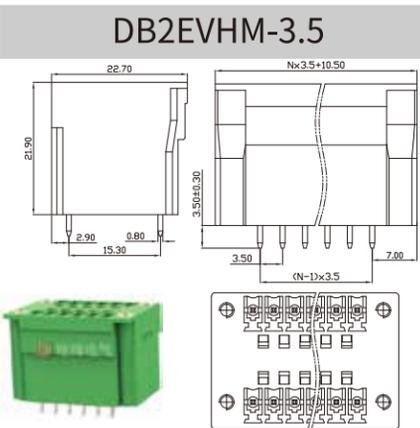
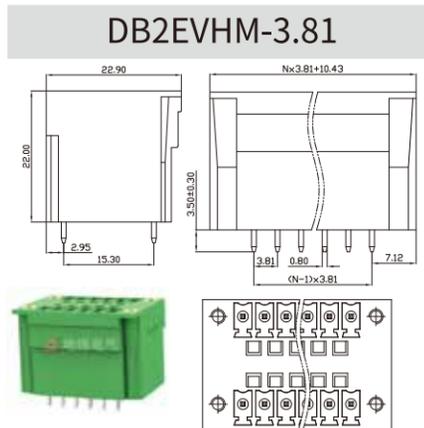


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		125	-	-
额定电流 Rated Current [A]		4	-	-
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		2.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

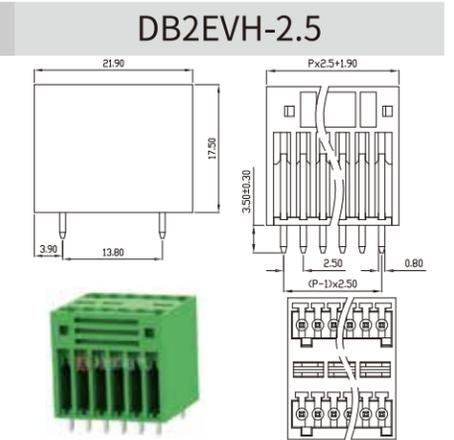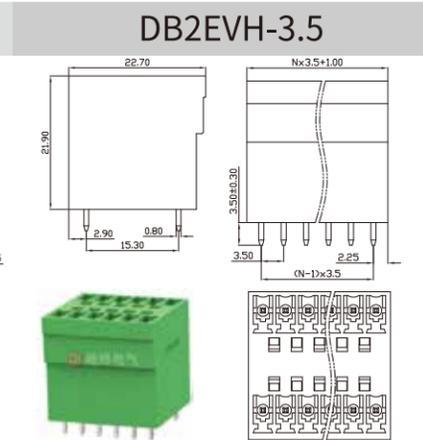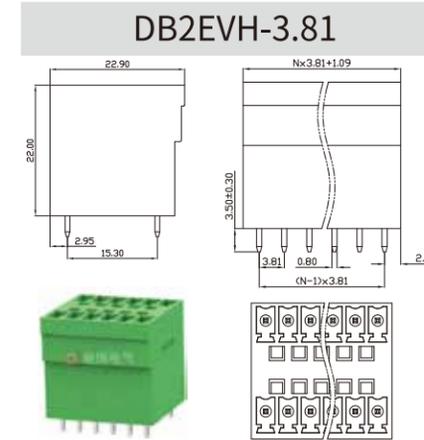

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

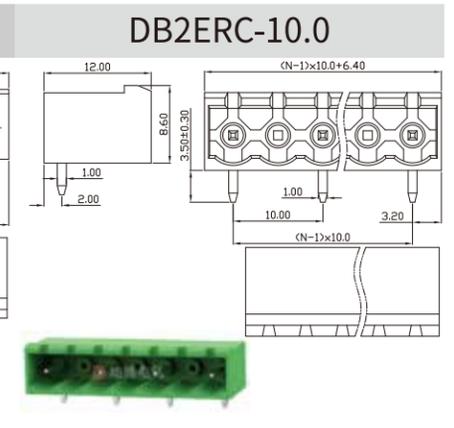
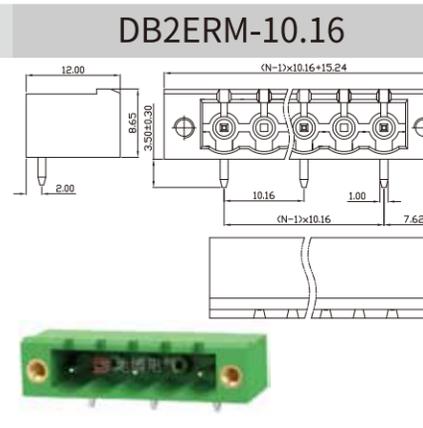
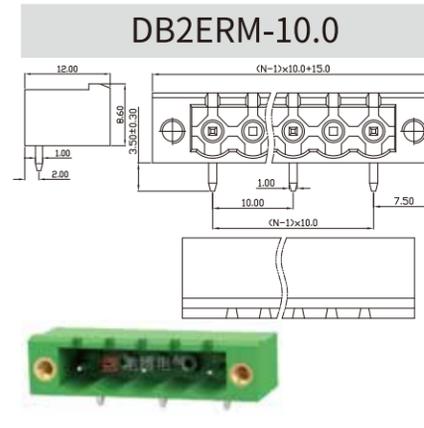


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	-			
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	10.16			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	-			
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			




UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	-			
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	10.16			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

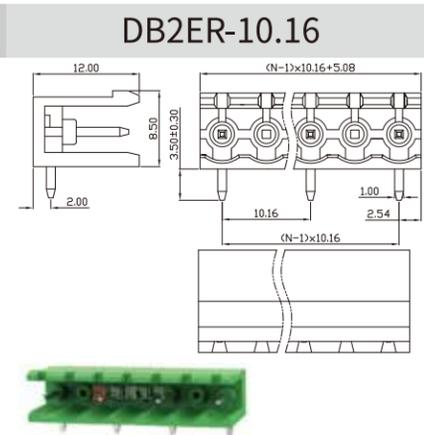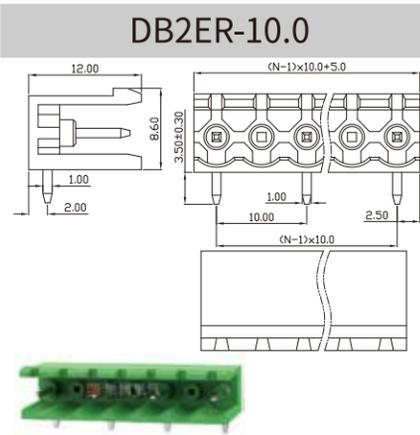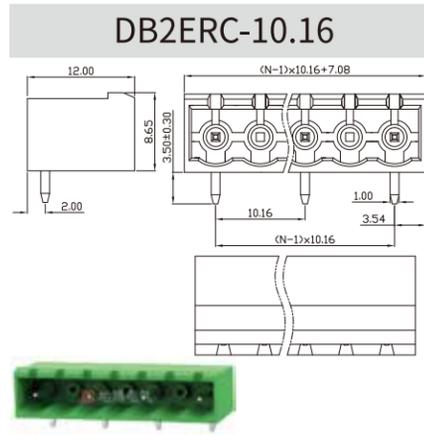

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	-			
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	-			
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	10.16			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	-			
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

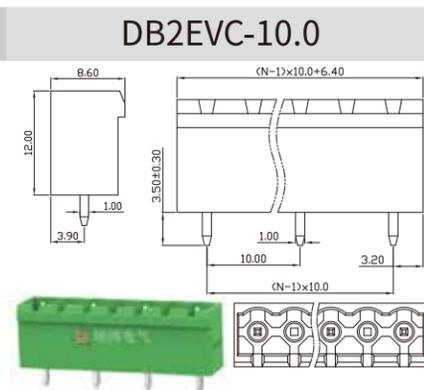
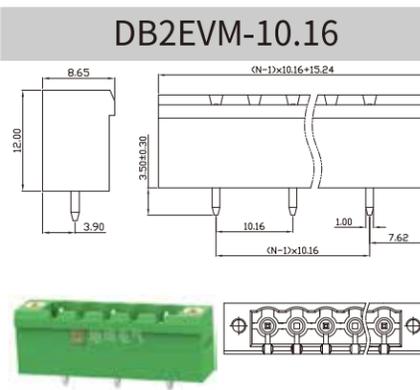
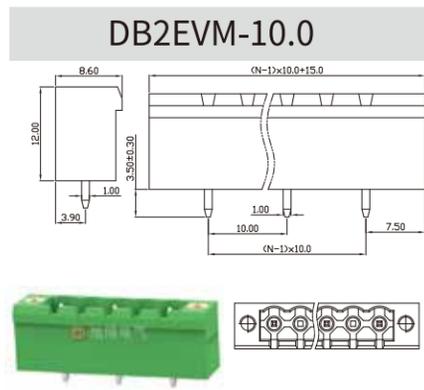


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	-			
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	10.16			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	-			
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	10.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			




UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	-			
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	10.16			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

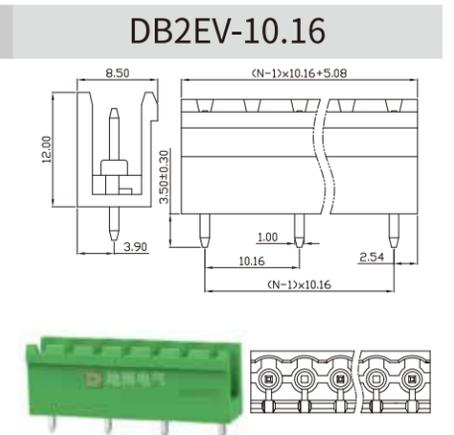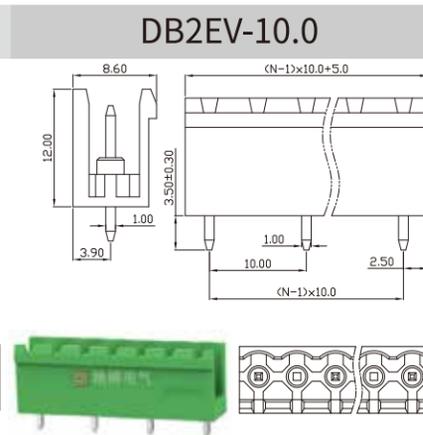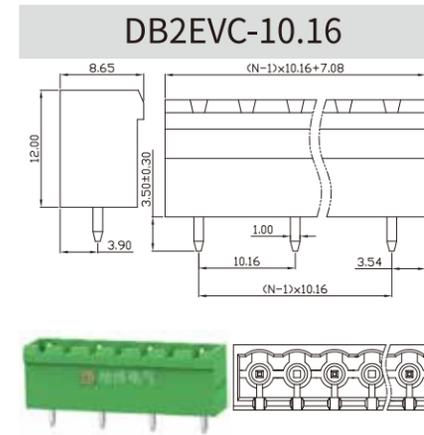

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	-			
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	7.62			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	-			
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	7.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	-			
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.08			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

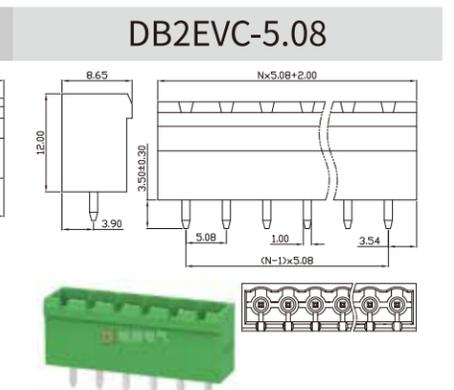
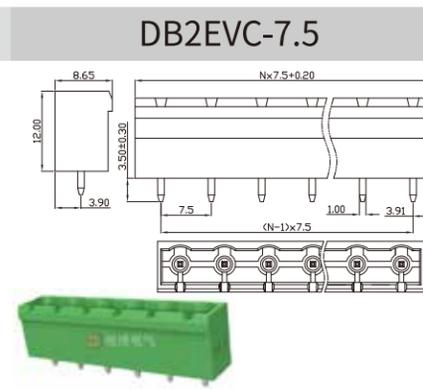
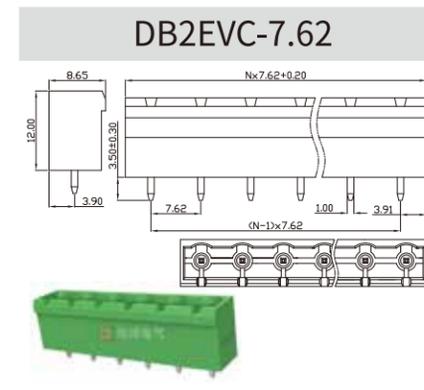


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		




UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

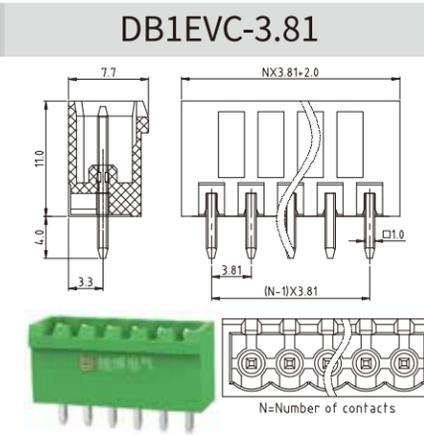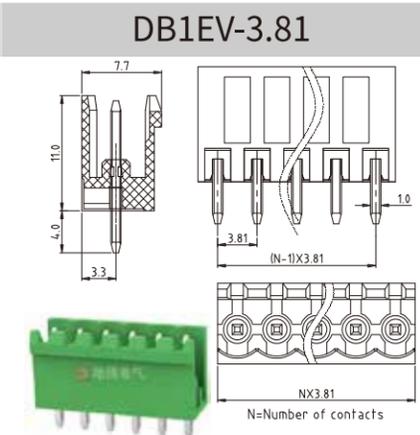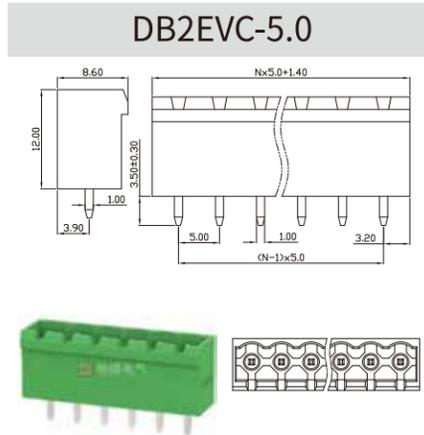

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

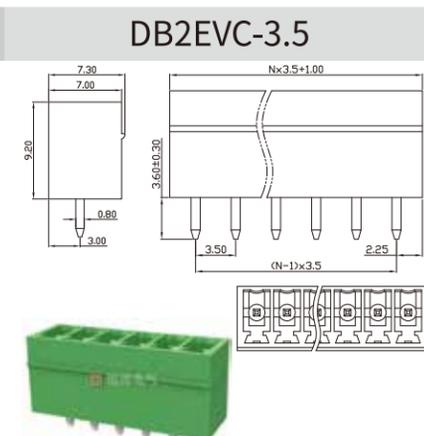
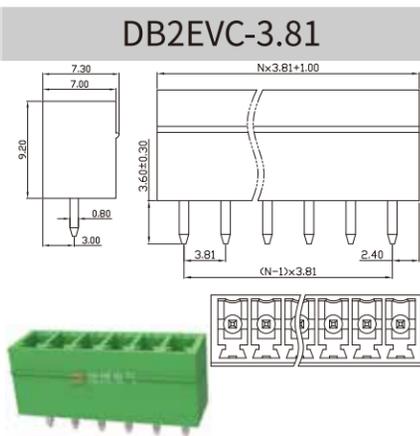
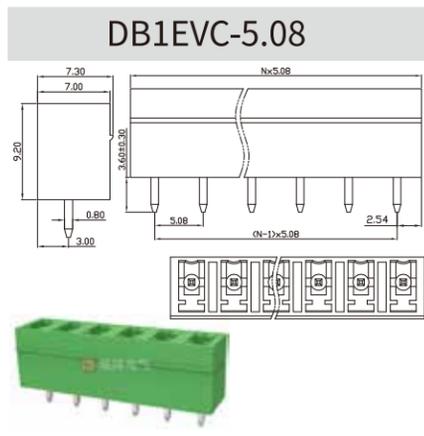


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		




UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

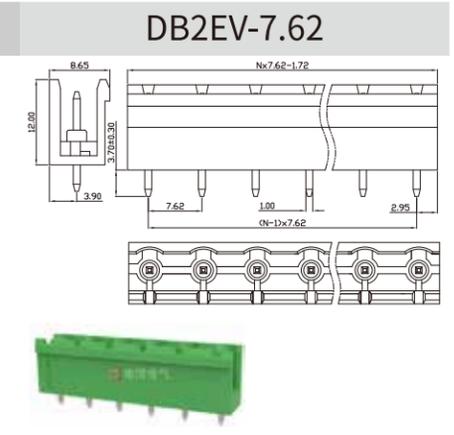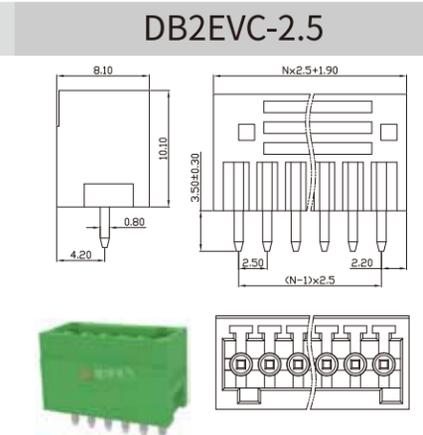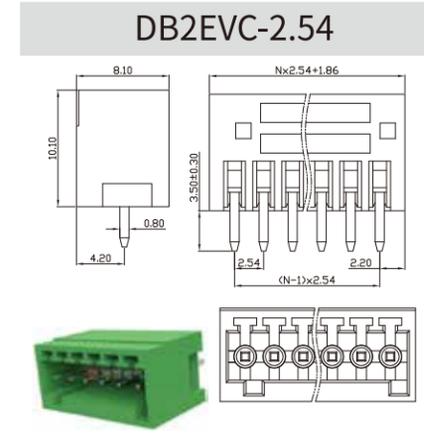

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

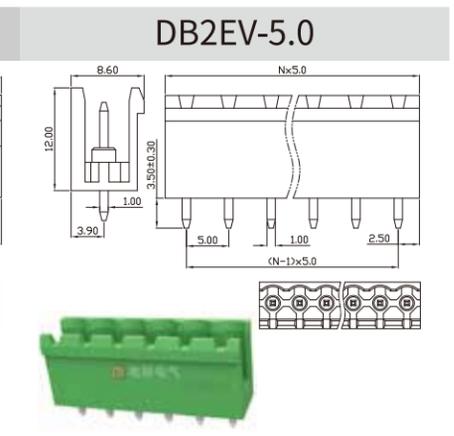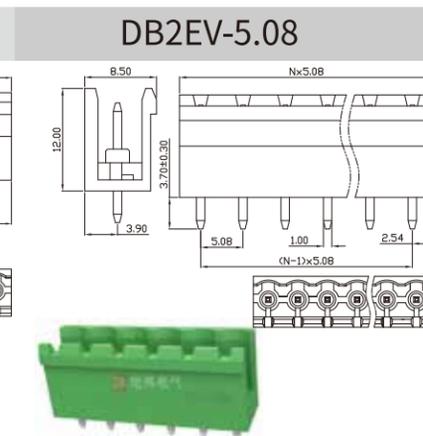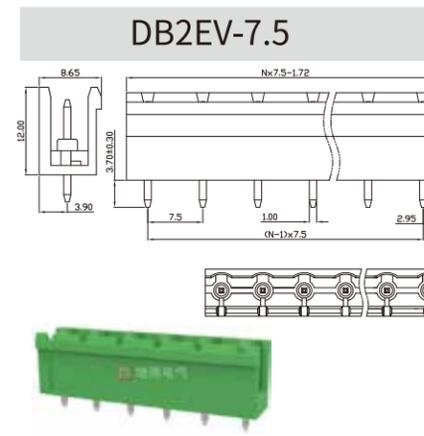


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


DB2ERM-7.62

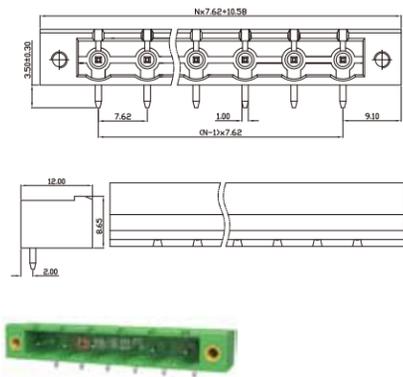


DB2ERM-7.5

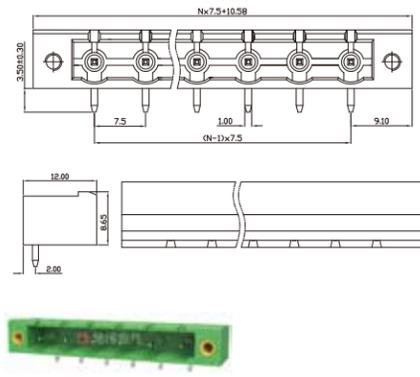


DB2ERM-5.08

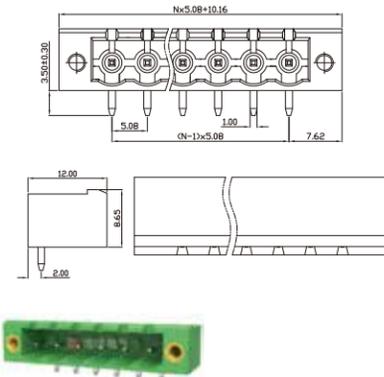


DB2ERM-3.5

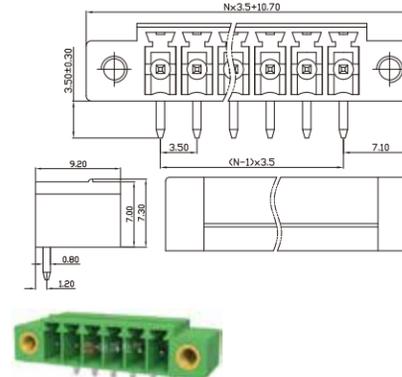

DB2ERMF-5.08

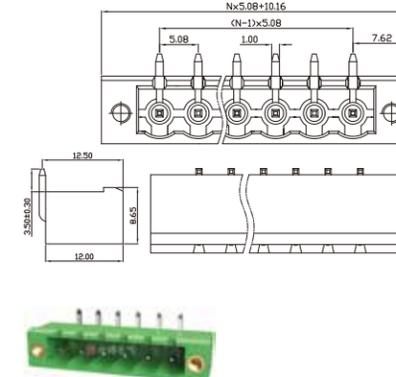

DB2ERMF-3.81

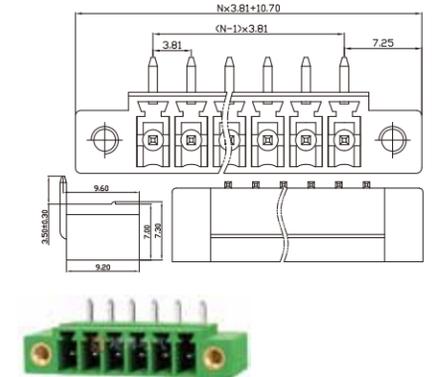

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	50	-
额定电流 Rated Current [A]		8	8	-
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	50	-
额定电流 Rated Current [A]		8	8	-
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


DB2ERM-5.0

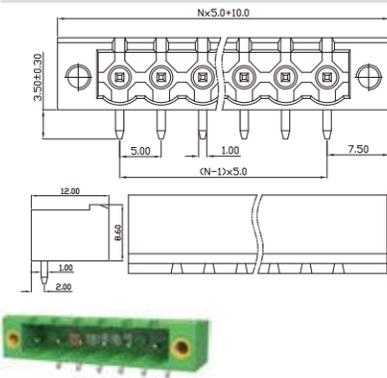


DB1ERM-5.08

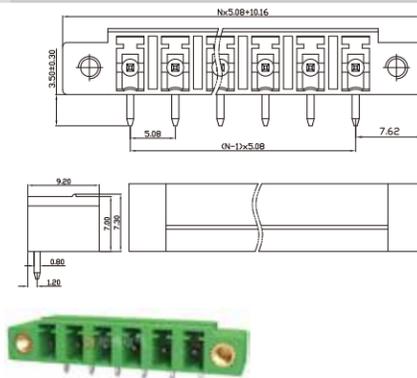


DB2ERM-3.81

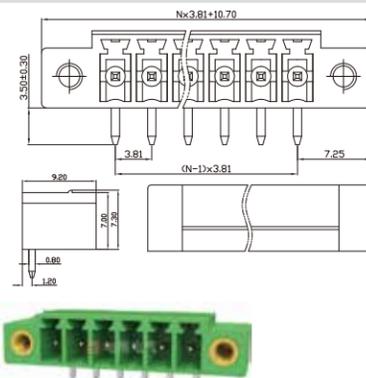


DB2ERMF-3.5

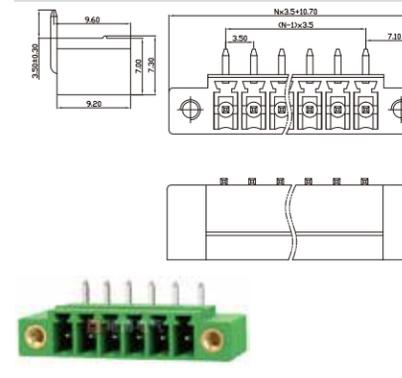

DB2ERHCM-3.5

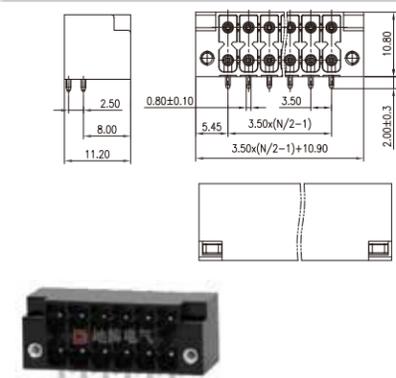

DB2ERHC-3.5

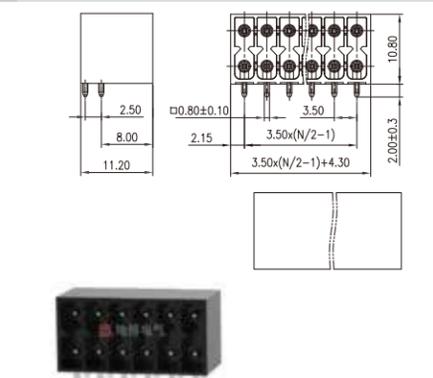




# 插拔式接线端子 Plug-In terminal block

# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	50	-
额定电流 Rated Current [A]		8	8	-
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	-	-
额定电流 Rated Current [A]		10	-	-
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

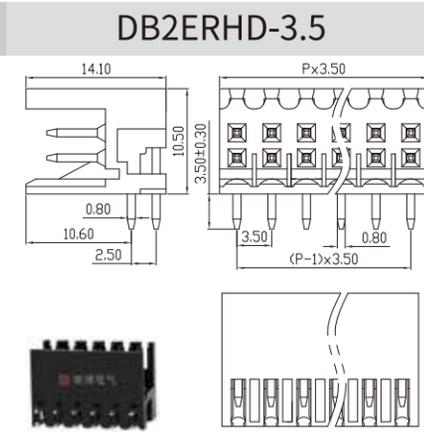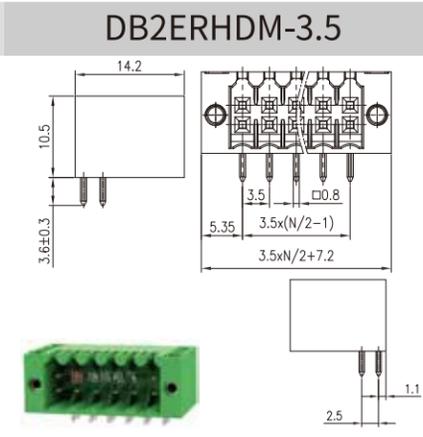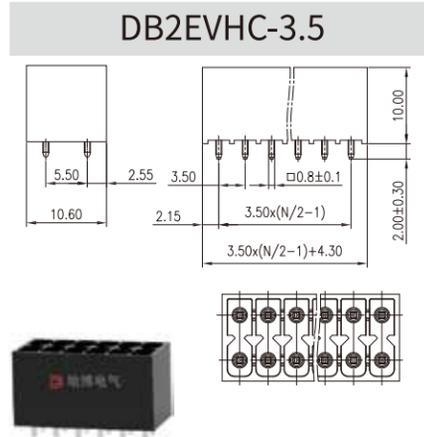

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	-	-
额定电流 Rated Current [A]		10	-	-
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	50	-
额定电流 Rated Current [A]		10	10	-
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	50	-
额定电流 Rated Current [A]		10	10	-
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

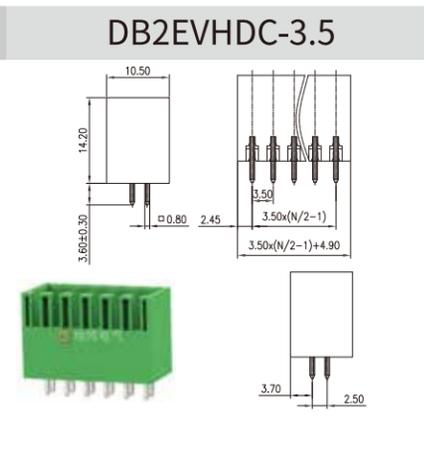
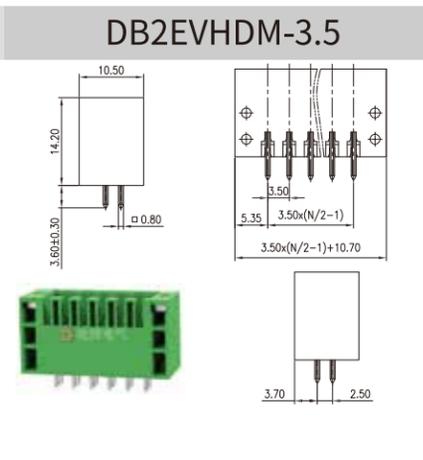
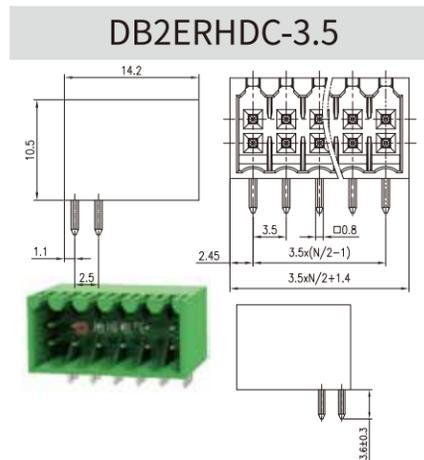


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

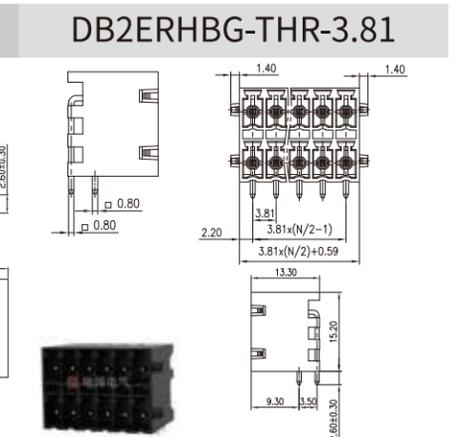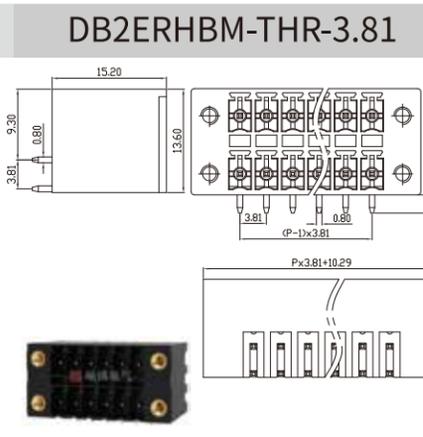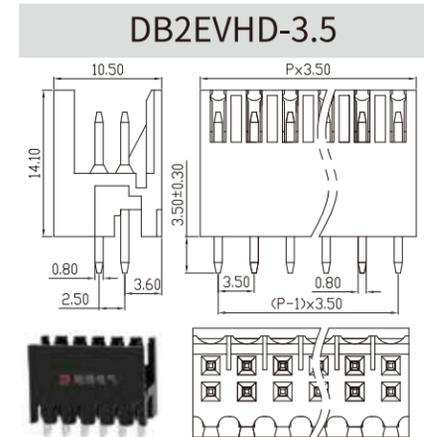

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

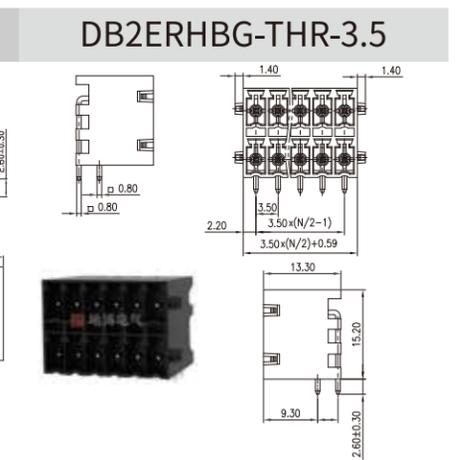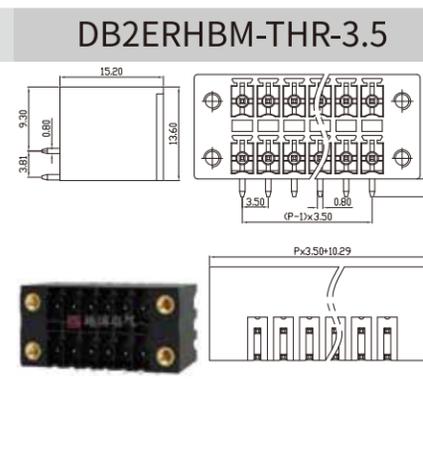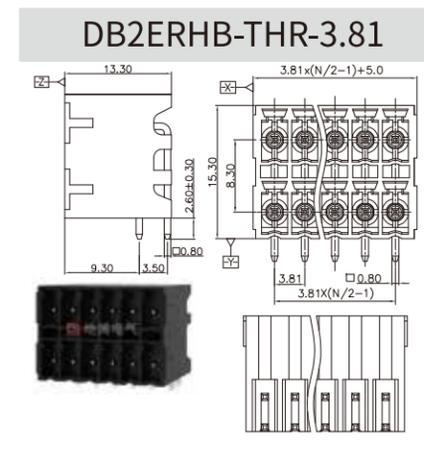


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


DB2ERHB-THR-3.5

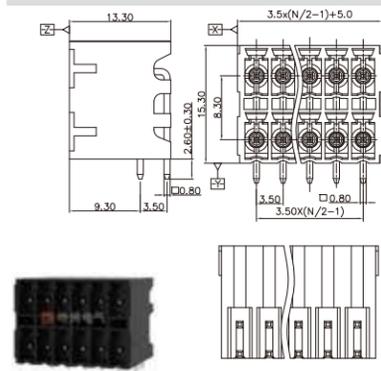


DB2EVHBM-THR-3.81

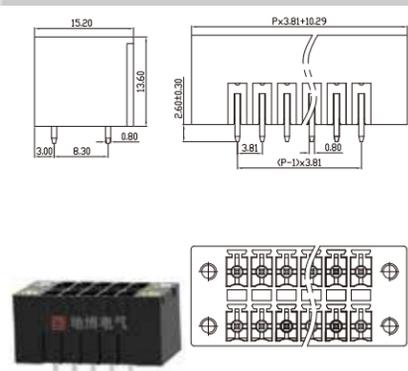


DB2EVHBM-THR-3.81

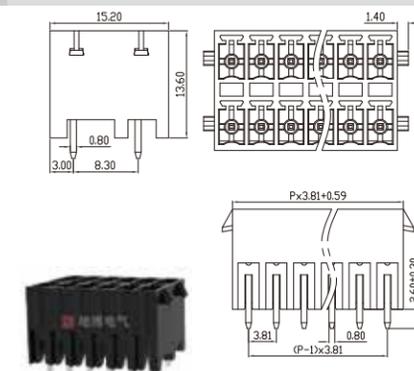


DB2EVHB-THR-3.5

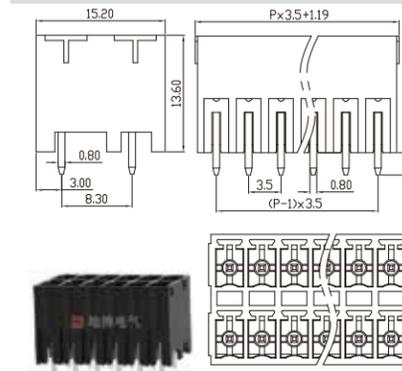

DB2ERHM-5.08

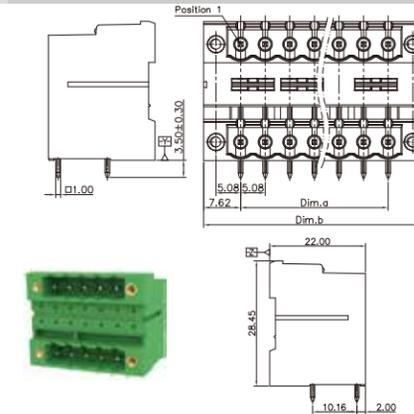

DB2ERHM-3.81

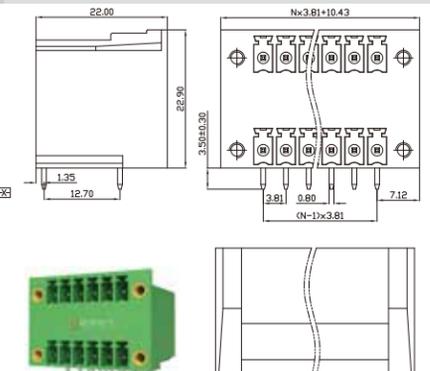

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


DB2EVHB-THR-3.81

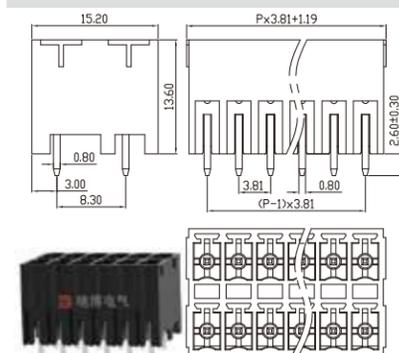


DB2EVHBM-THR-3.5

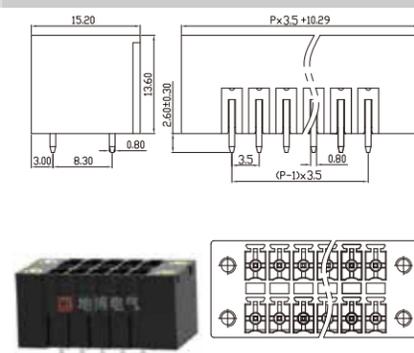


DB2EVHBM-THR-3.5

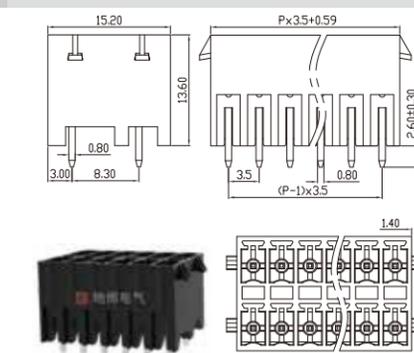


DB2ERHM-3.5

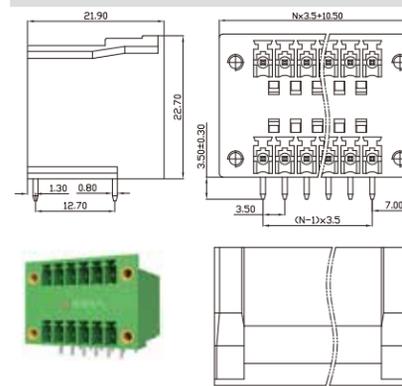

DB2ERH-5.08

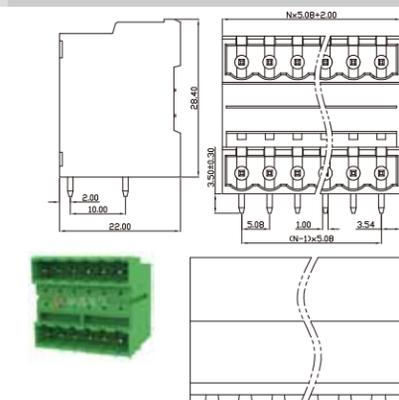

DB2ERH-3.81



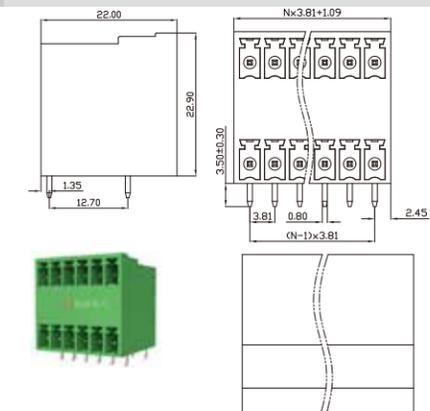


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 8	8	-	8
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	3.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	125 - -	125	-	-
额定电流 Rated Current [A]	4 - -	4	-	-
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	2.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.08			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

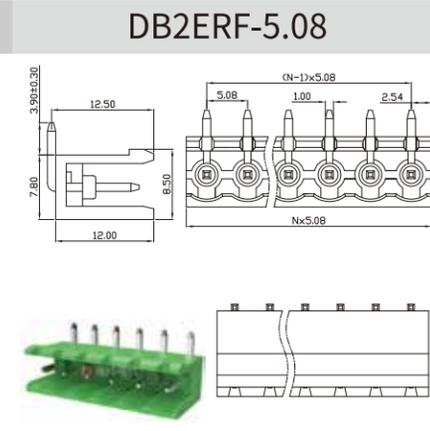
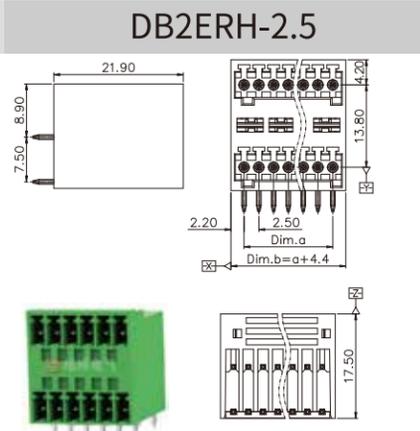
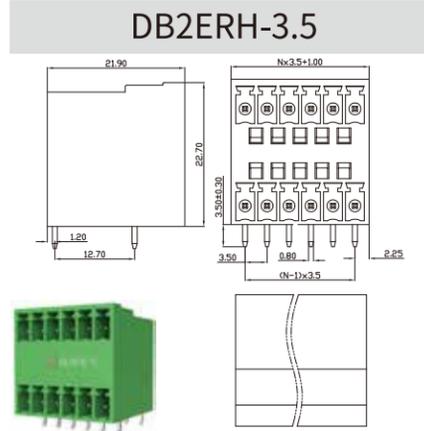


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	7.62			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	7.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.08			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

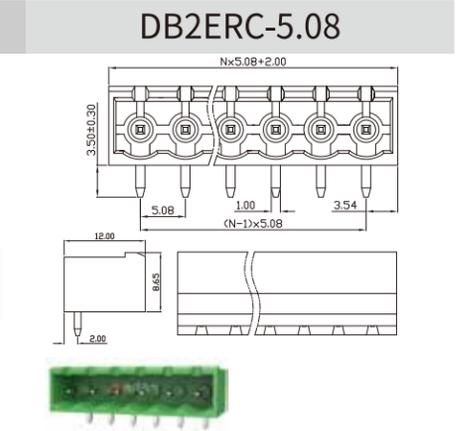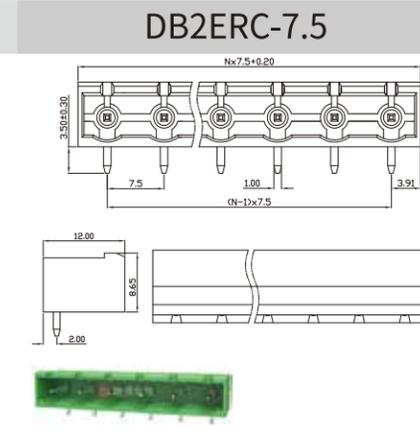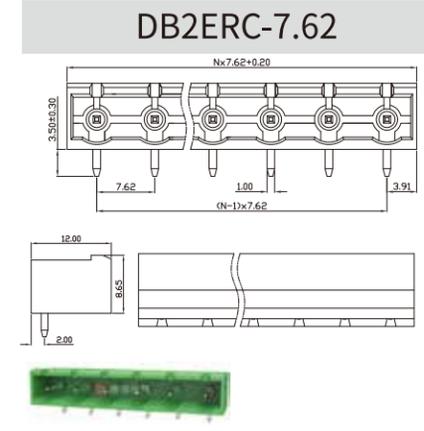

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.08			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			







UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 8	8	-	8
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	3.81			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 8	8	-	8
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	3.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	12 - 10	12	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	3.81			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	12 - 10	12	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	3.81			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

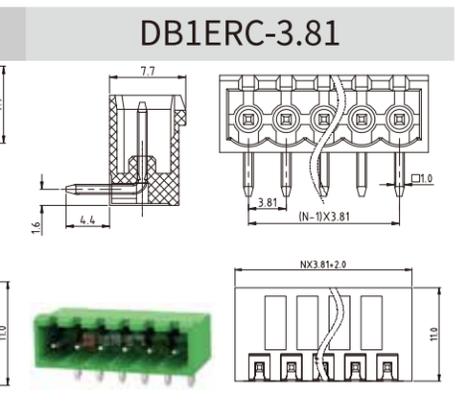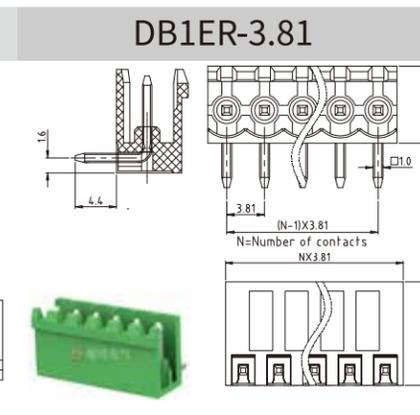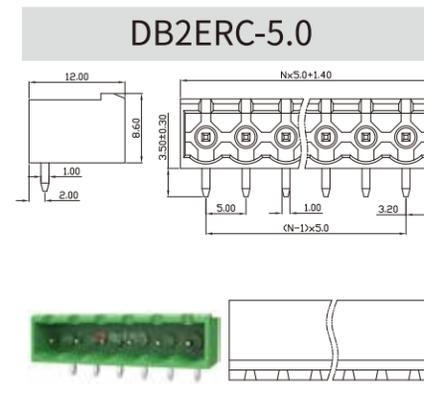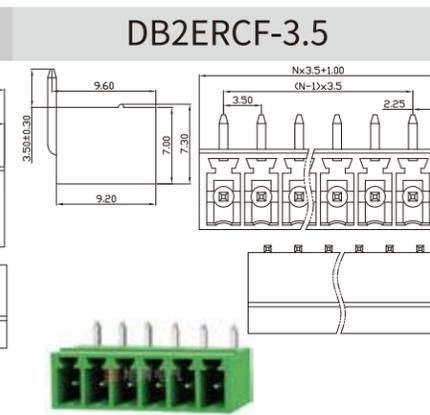
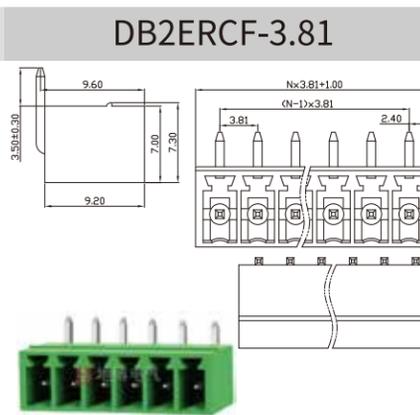
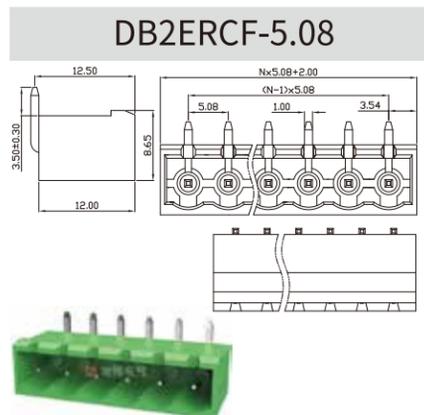


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 8	8	-	8
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.08			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 8	8	-	8
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	3.81			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	12 - 10	12	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	3.81			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

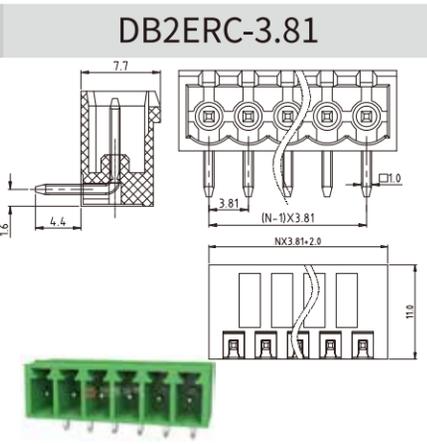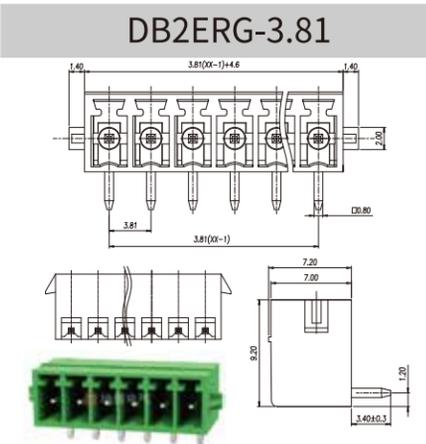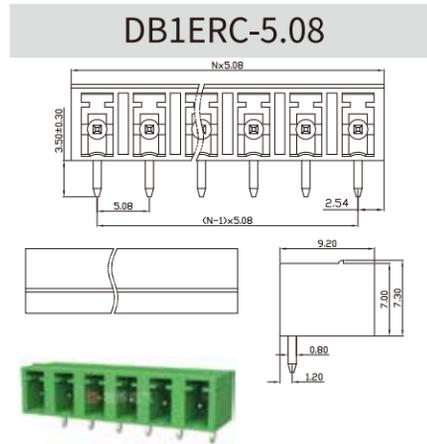

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 8	8	-	8
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	3.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 8	8	-	8
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	3.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	150 - -	150	-	-
额定电流 Rated Current [A]	5 - -	5	-	-
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	2.54			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

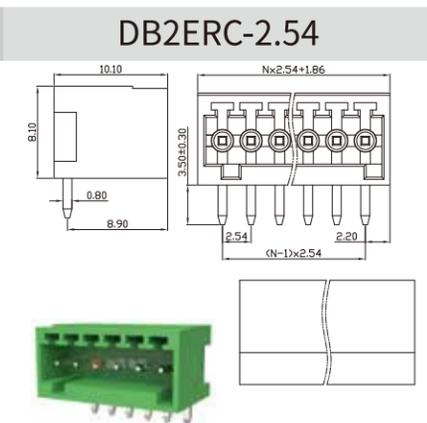
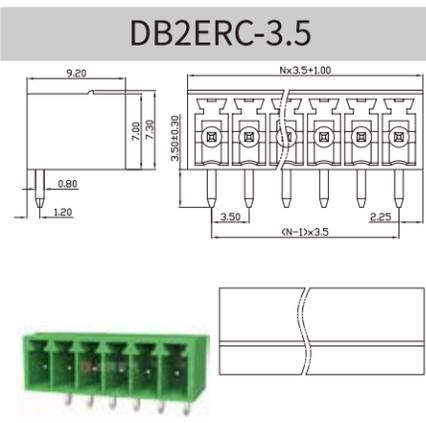
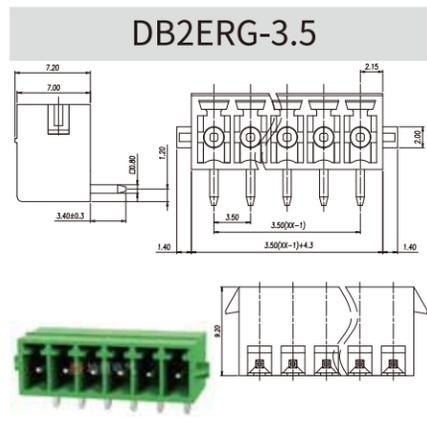


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	150 - -	150	-	-
额定电流 Rated Current [A]	5 - -	5	-	-
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	2.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	7.62			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	7.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

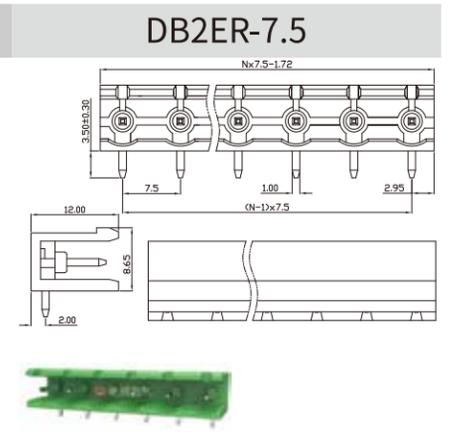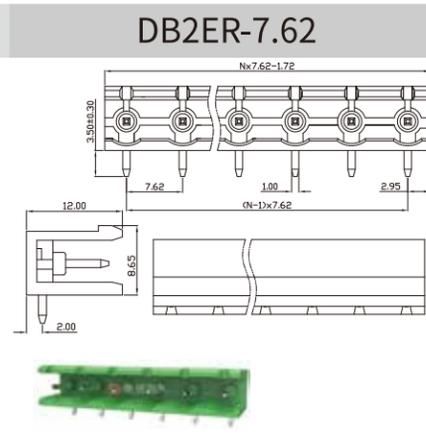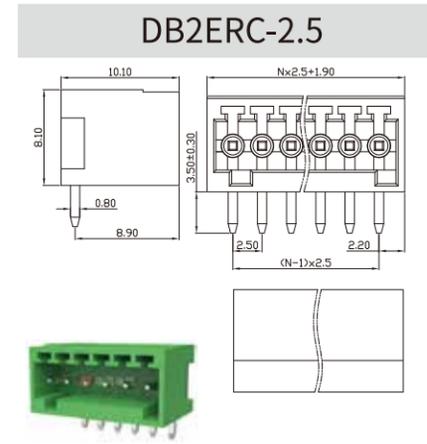

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.08			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - -	300	-	-
额定电流 Rated Current [A]	10 - -	10	-	-
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-			
间距 Pitch [mm]	5.08			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			

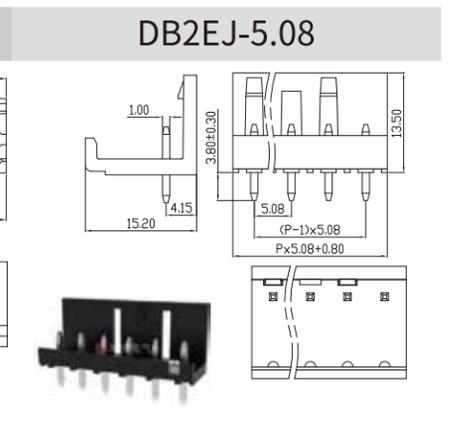
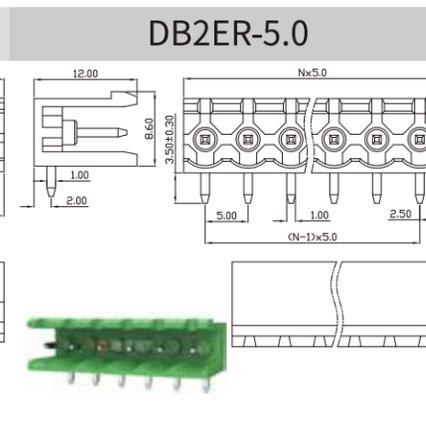
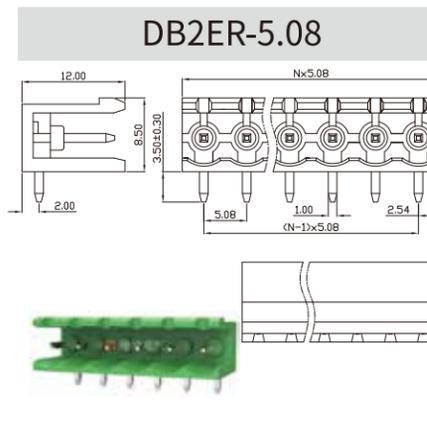


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

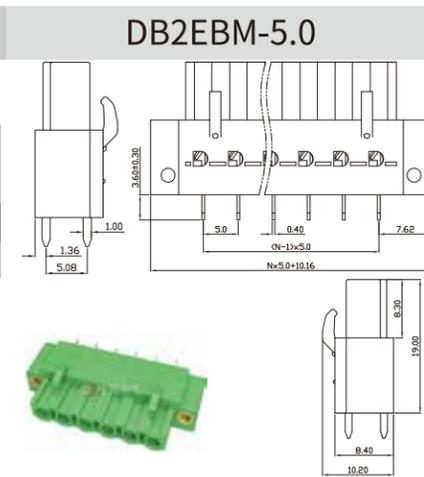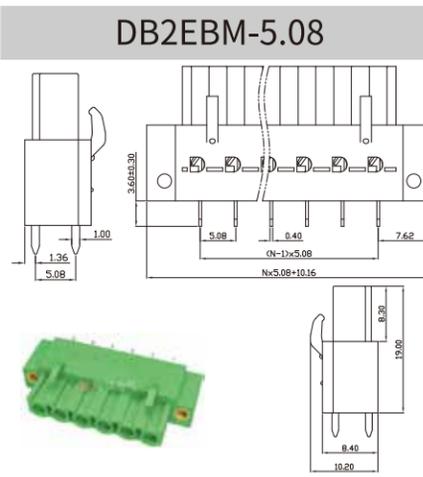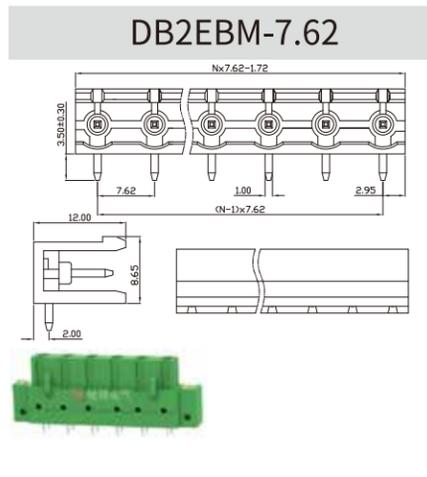

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

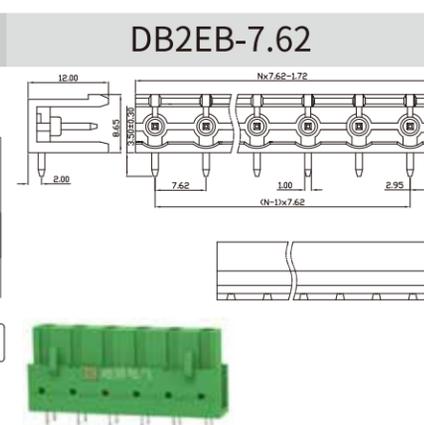
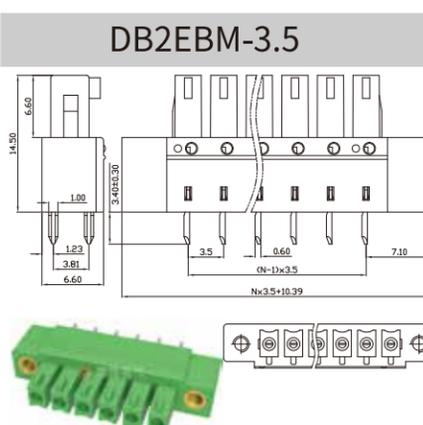
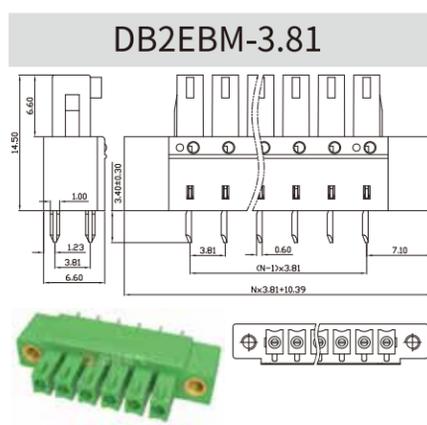


# 插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

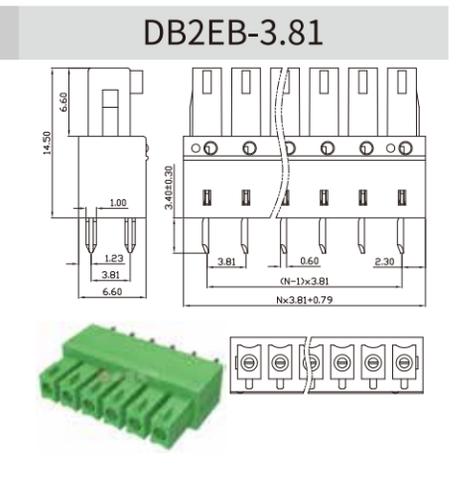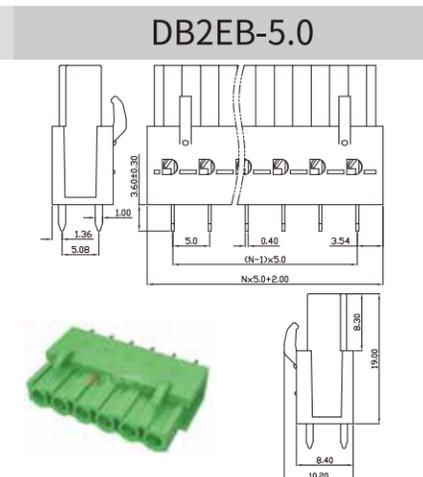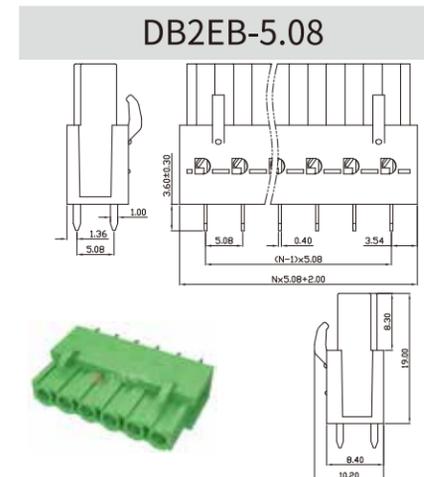

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

