



插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8	额定电流 Rated Current [A]	15	-	10	额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range				接线范围 Wire Range				接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]			
间距 Pitch [mm]	3.81			间距 Pitch [mm]	5.08			间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]				螺丝 Screw/扭矩 Torque(Max) [N.m]				螺丝 Screw/扭矩 Torque(Max) [N.m]			

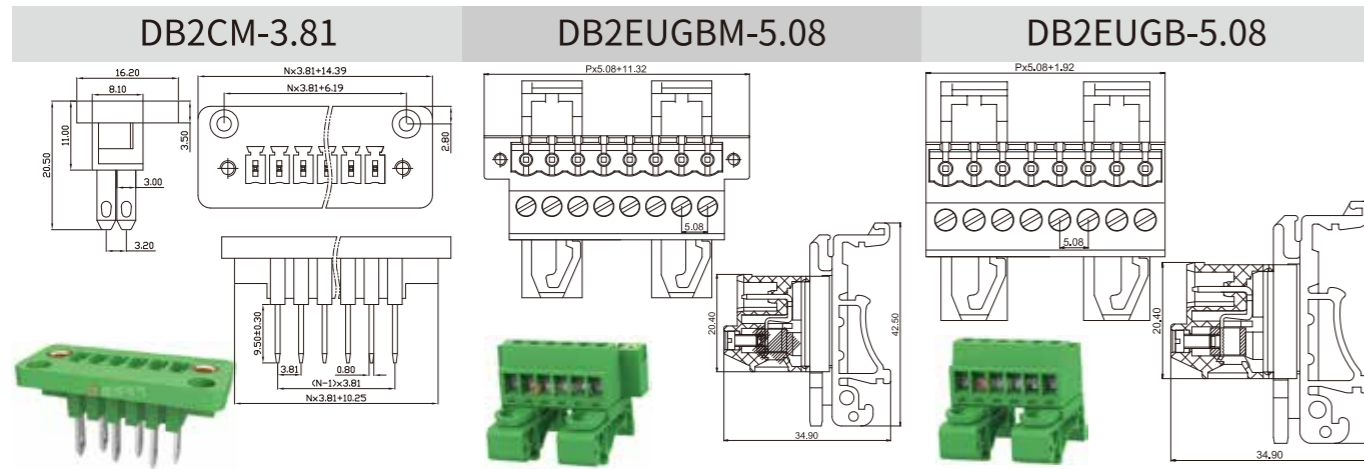


UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8	额定电流 Rated Current [A]	15	-	10	额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range	24-12			接线范围 Wire Range	24-12			接线范围 Wire Range	24-16		
单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]			
间距 Pitch [mm]	5.08			间距 Pitch [mm]	5.08			间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4			螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4			螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

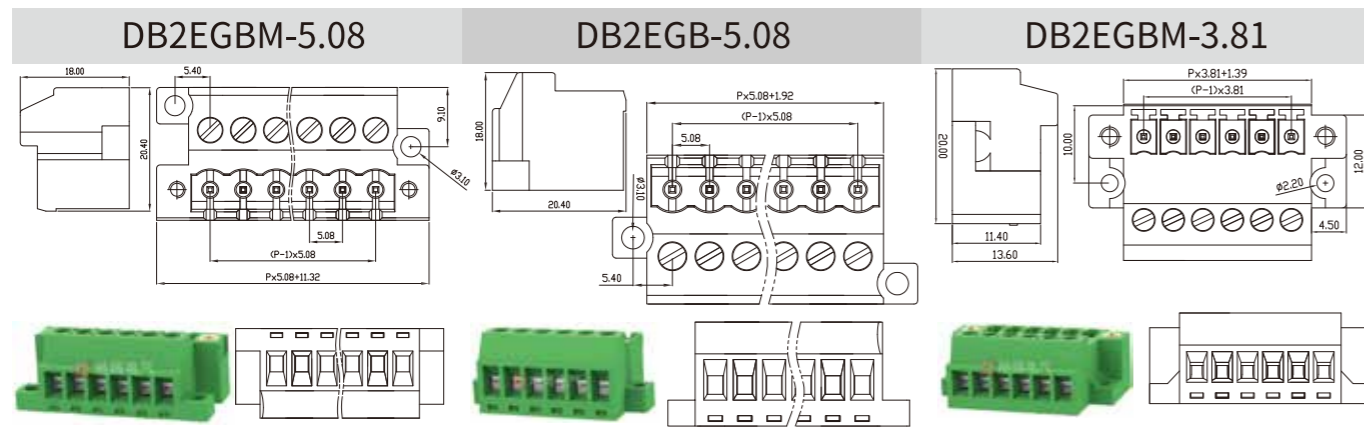


插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10	额定电流 Rated Current [A]	15	-	10	额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	24-16			接线范围 Wire Range	24-12			接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]			
间距 Pitch [mm]	3.81			间距 Pitch [mm]	5.08			间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2			螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.2			螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

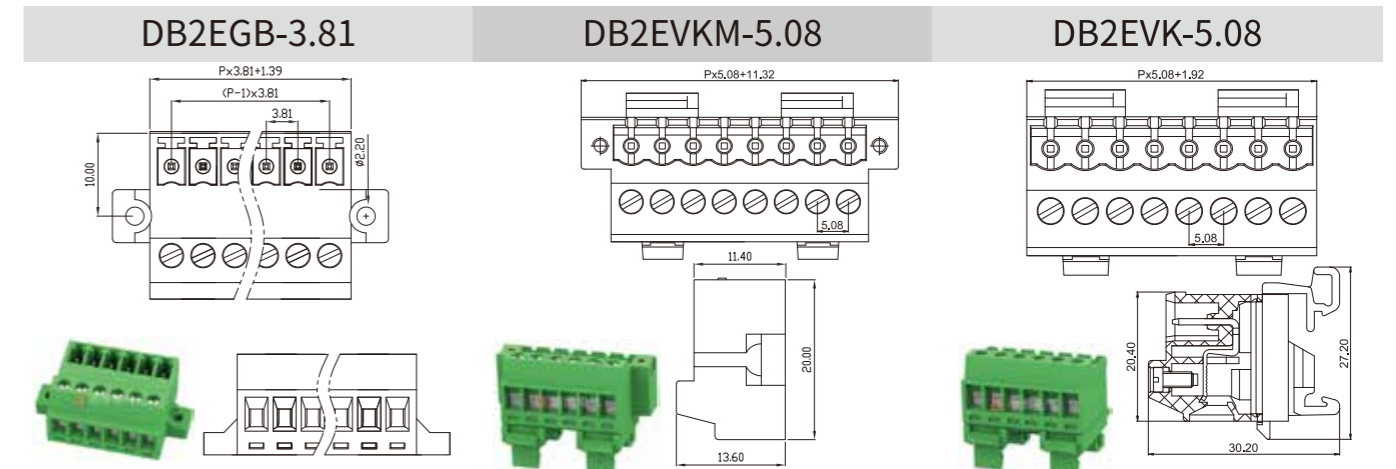

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10	额定电流 Rated Current [A]	15	-	10	额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12			接线范围 Wire Range	28-12			接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]			
间距 Pitch [mm]	5.08			间距 Pitch [mm]	5.08			间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5			螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5			螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		



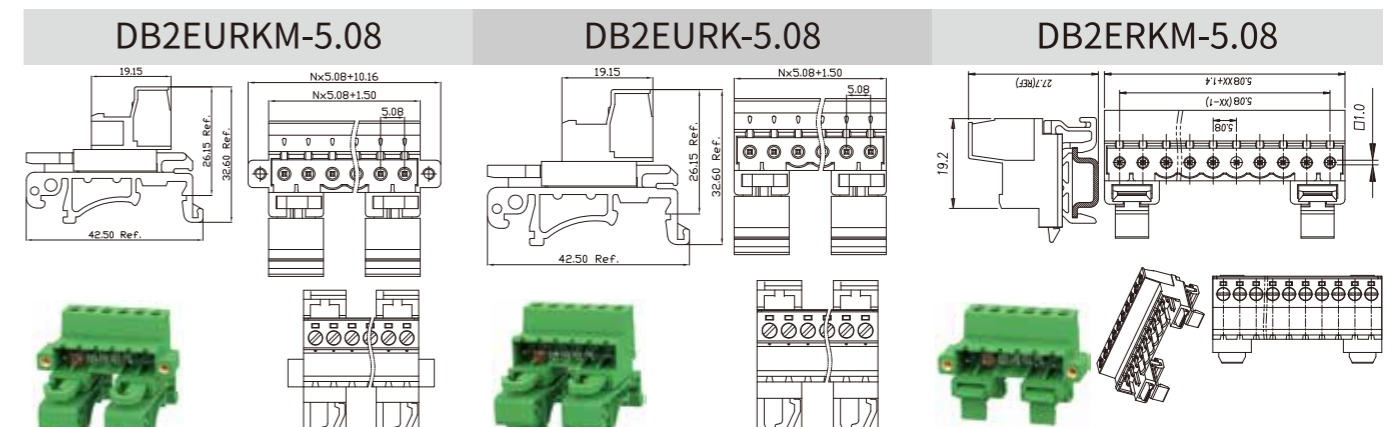


插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

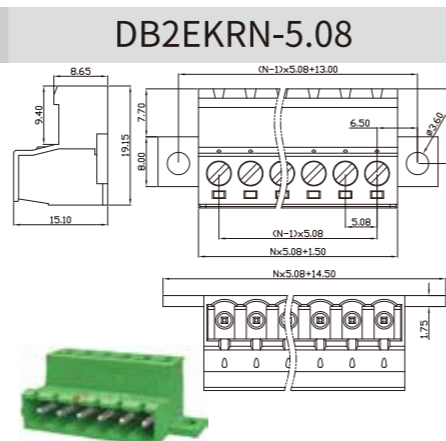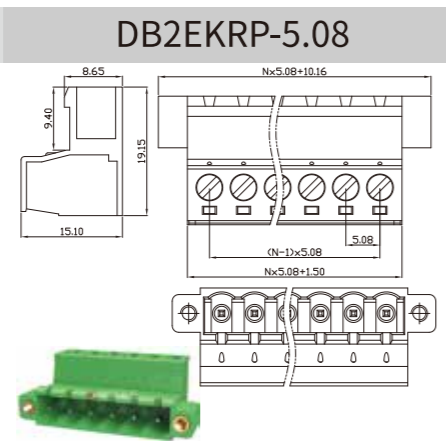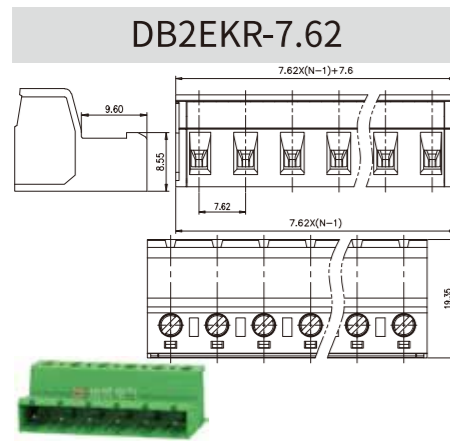

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		-	-	-
额定电流 Rated Current [A]		-	-	-
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

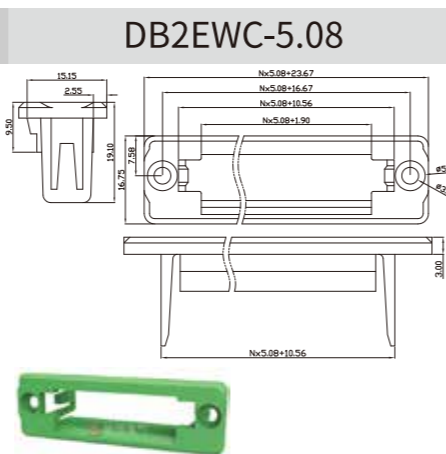
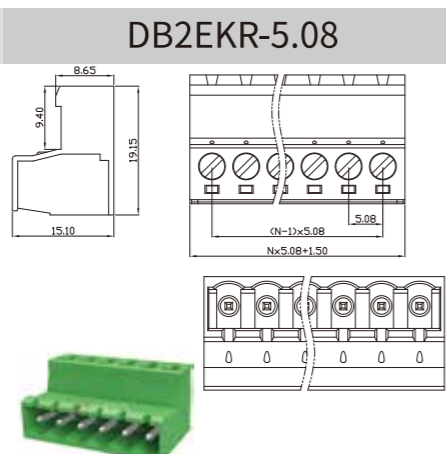
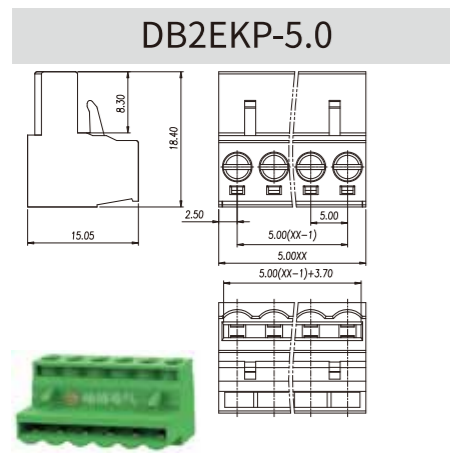


插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

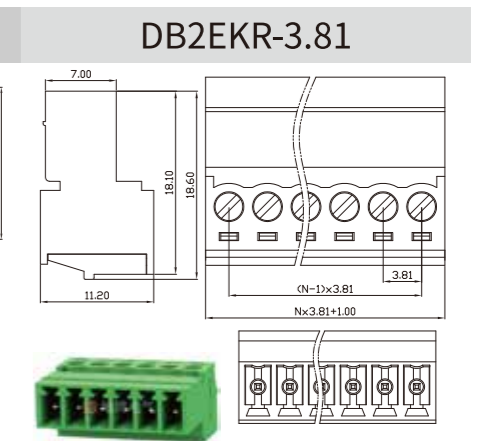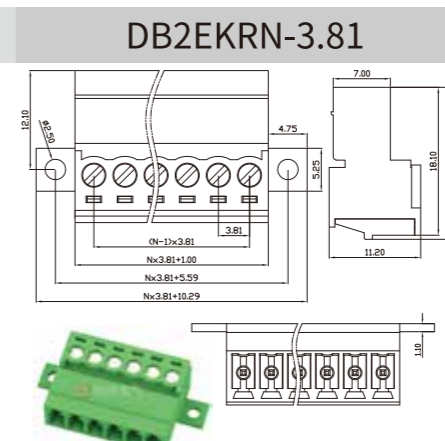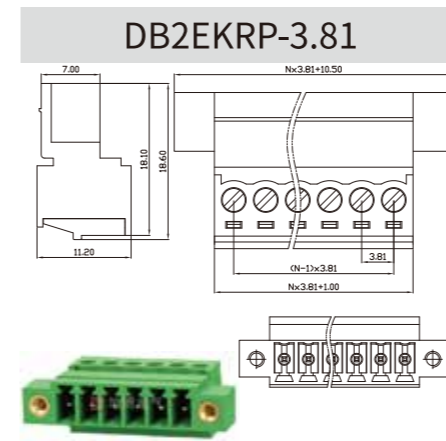

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		-	-	-
额定电流 Rated Current [A]		-	-	-
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	-	150
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		24-16		
单/多芯线 Solid/Stranded [AWG]		24-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		24-16		
单/多芯线 Solid/Stranded [AWG]		24-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

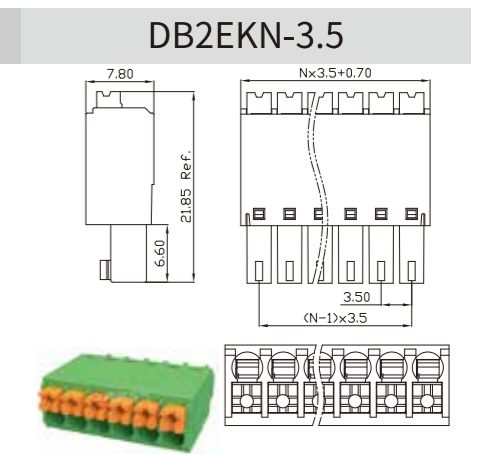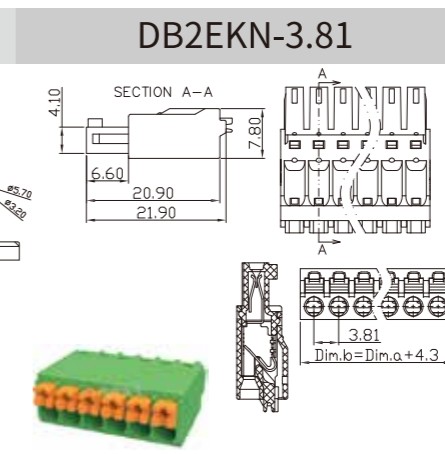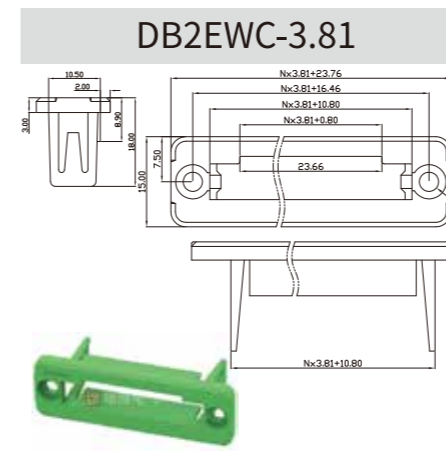


插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

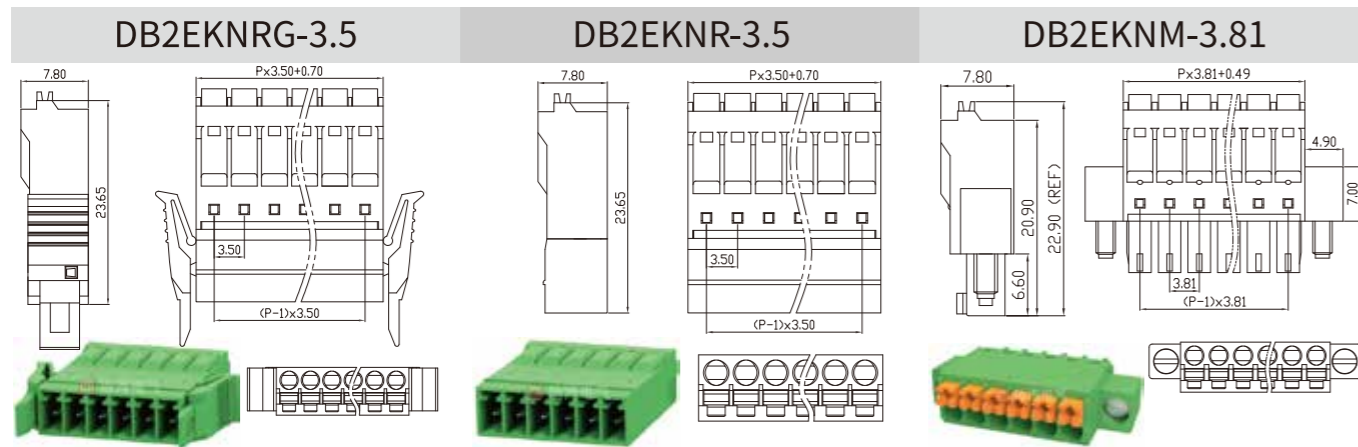


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	-	150
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		24-16		
单/多芯线 Solid/Stranded [AWG]		24-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

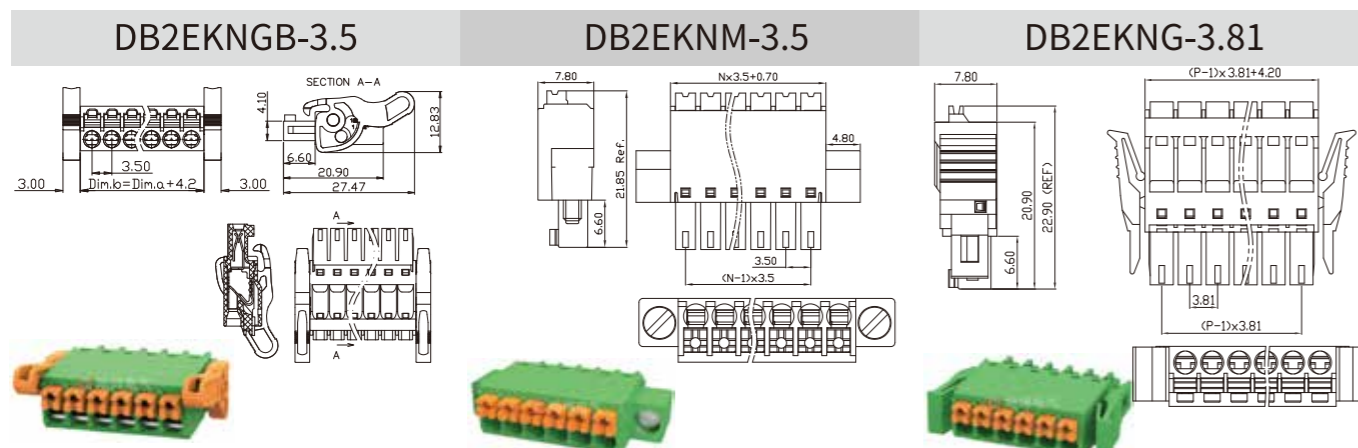


插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

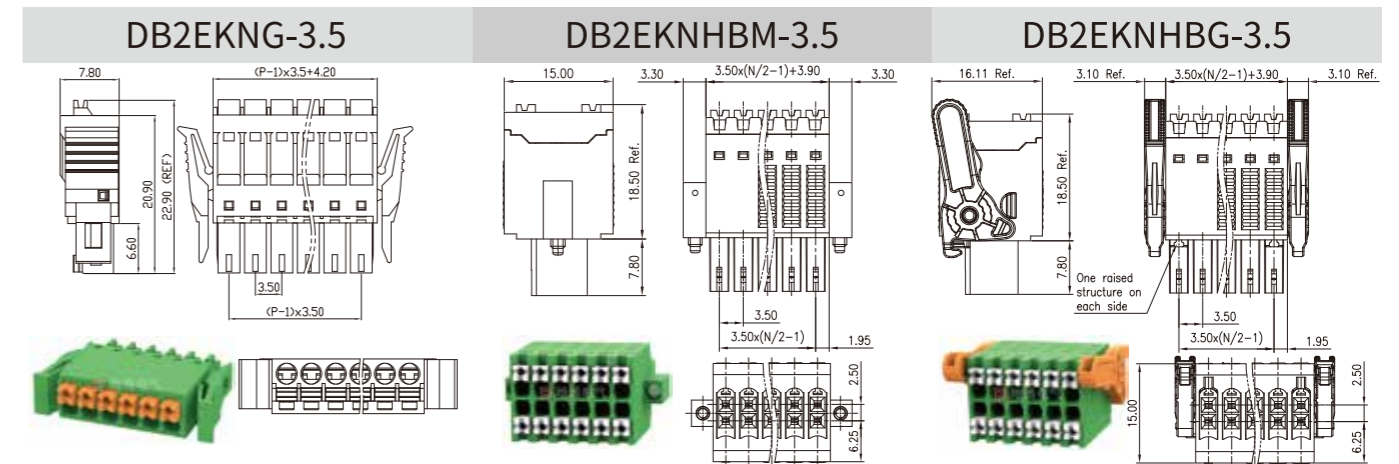

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	50	300
额定电流 Rated Current [A]		10	10	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		



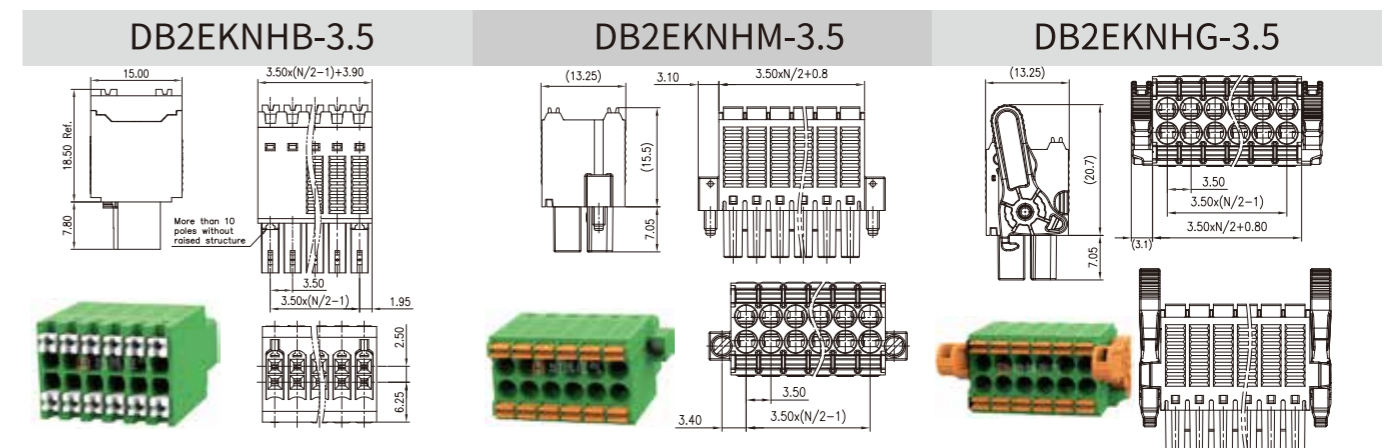


插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	50	-
额定电流 Rated Current [A]		8	8	-
接线范围 Wire Range		26-16		
单/多芯线 Solid/Stranded [AWG]		26-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

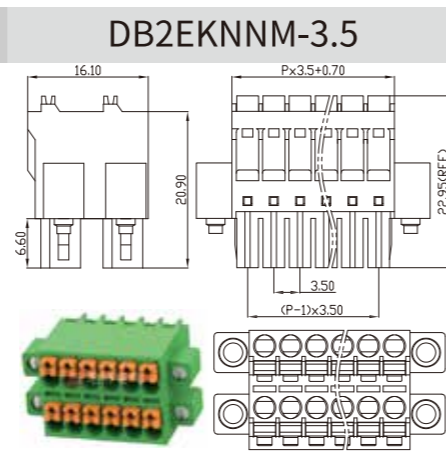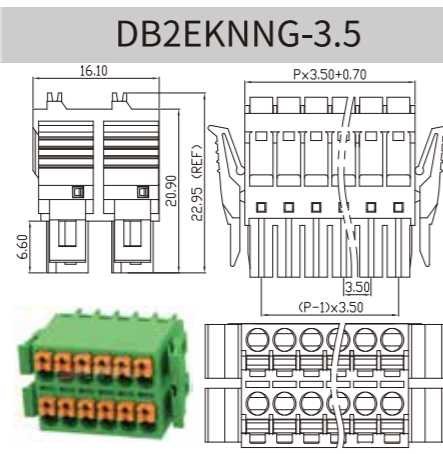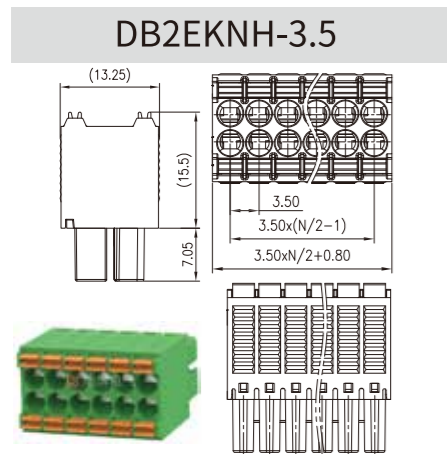

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

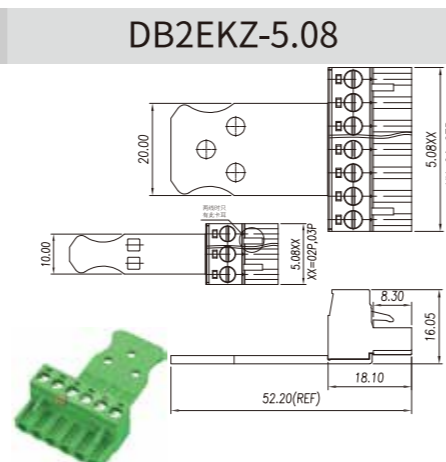
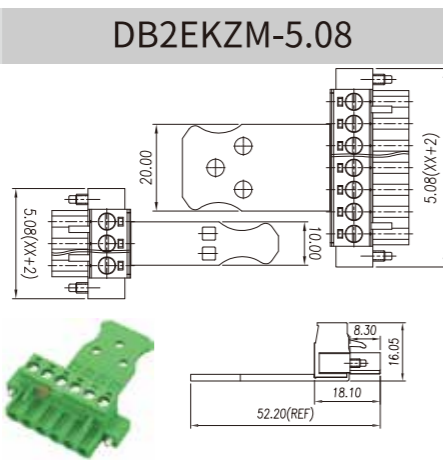
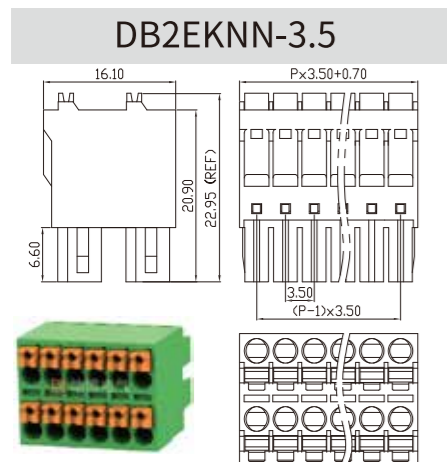


插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

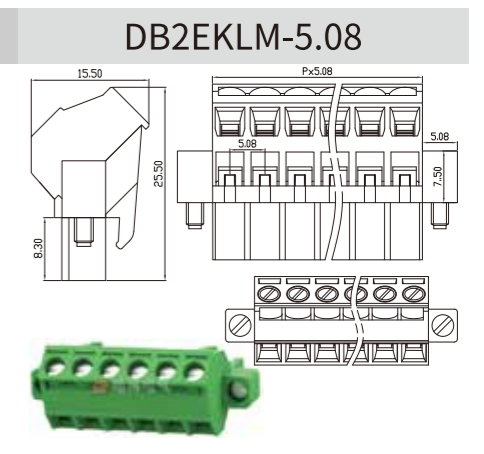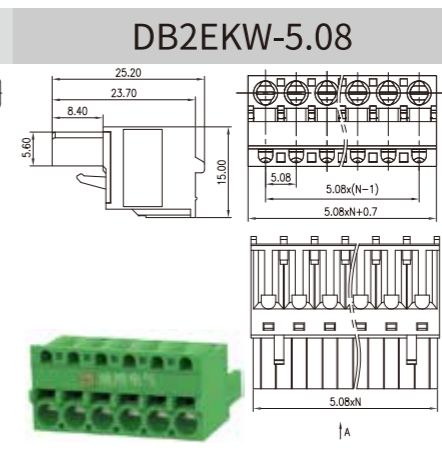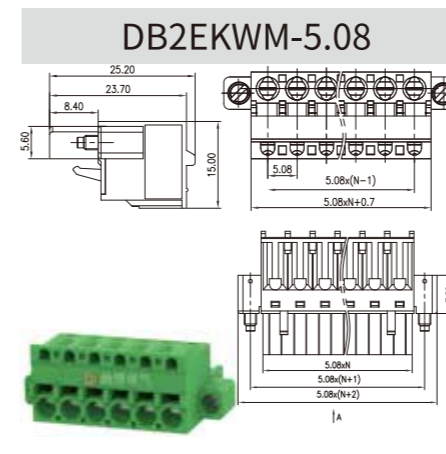

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	12
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		18	-	12
接线范围 Wire Range		30-12		
单/多芯线 Solid/Stranded [AWG]		30-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.6		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

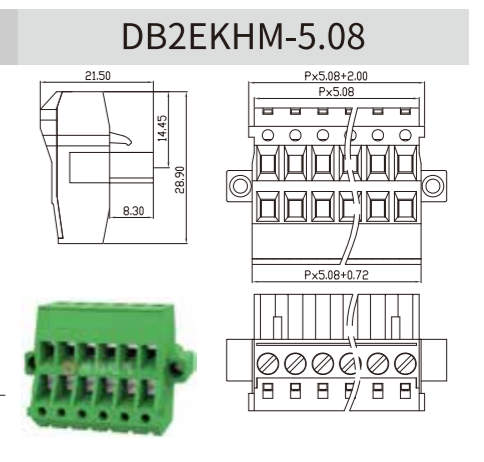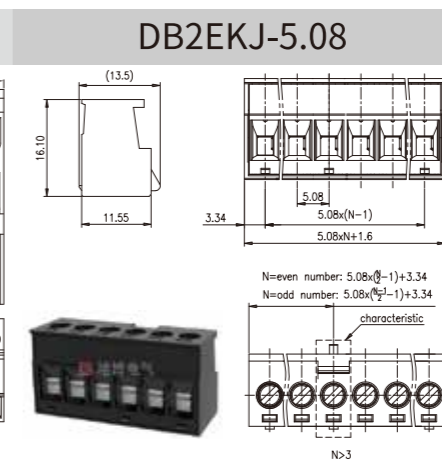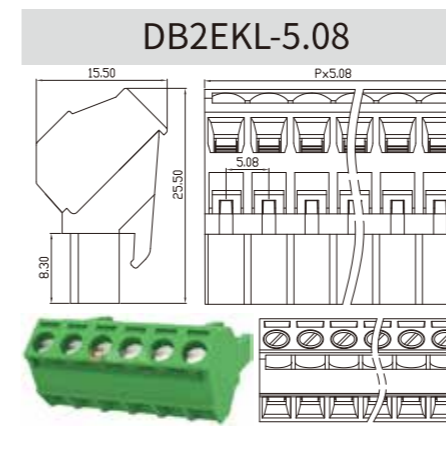

插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

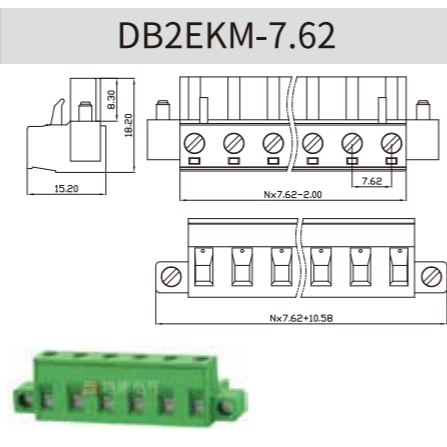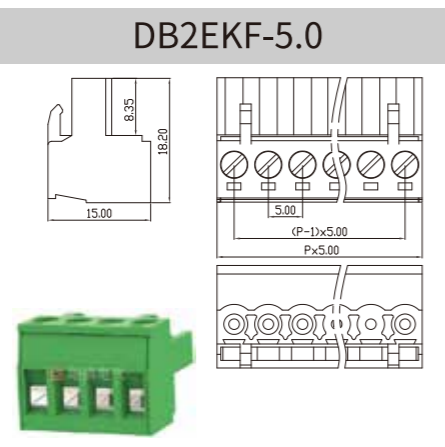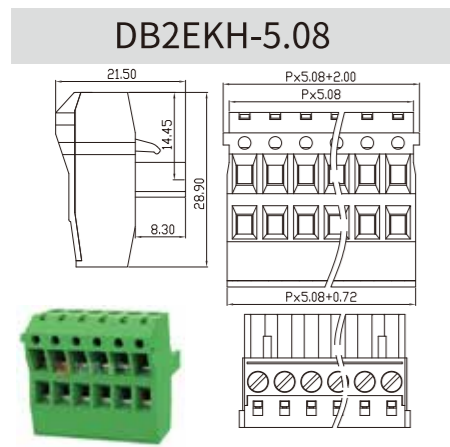

插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

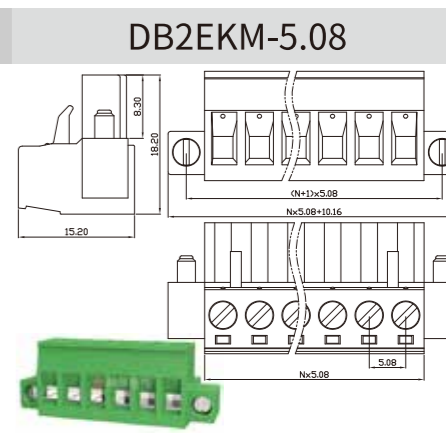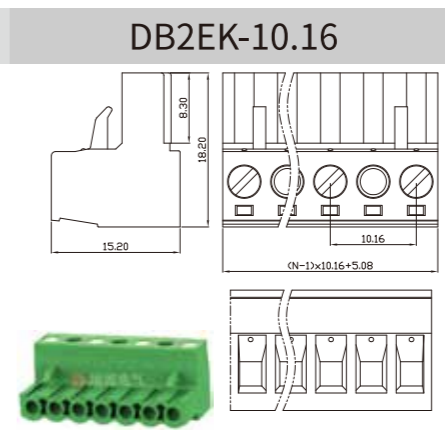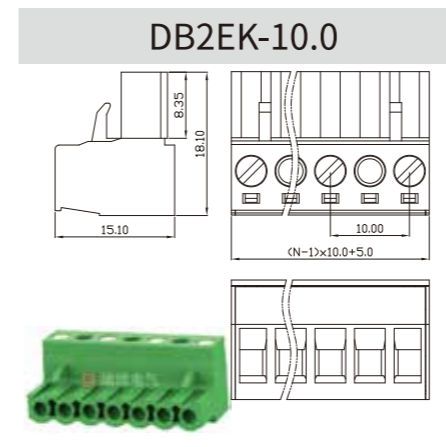

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--







等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

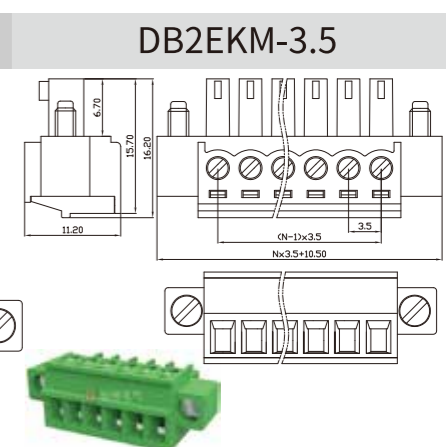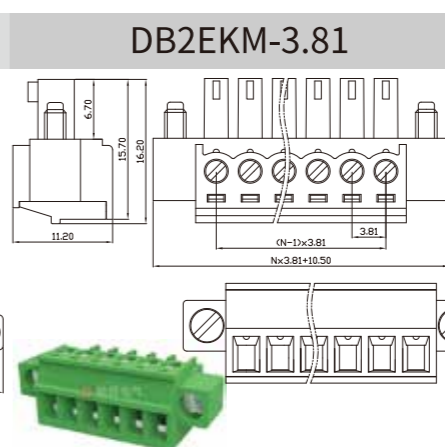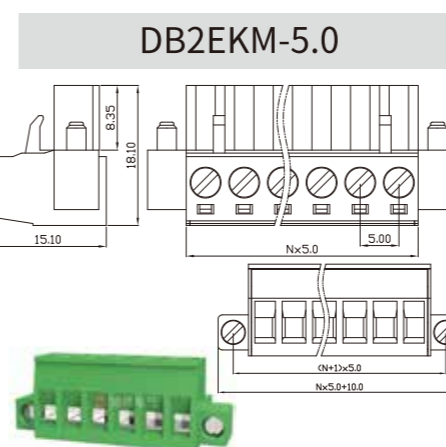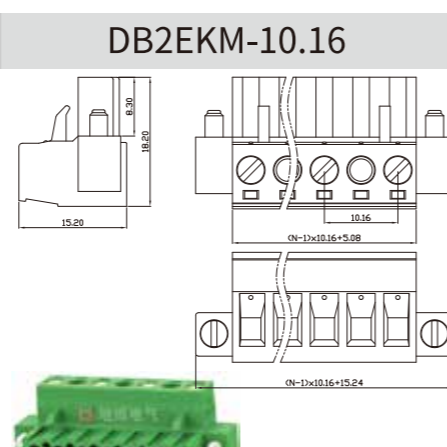
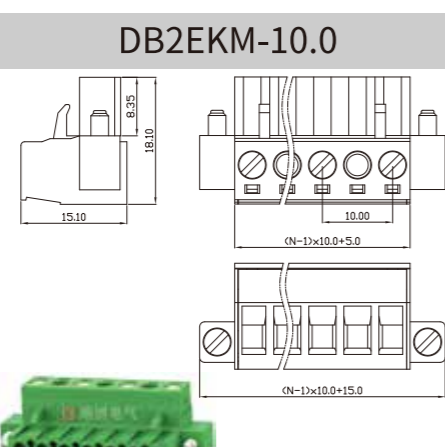
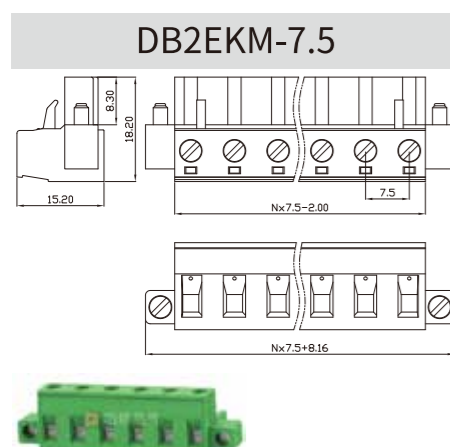


插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		24-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

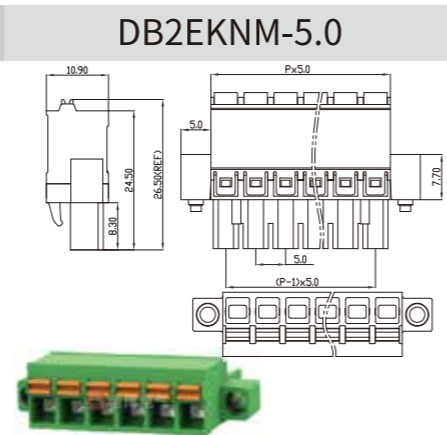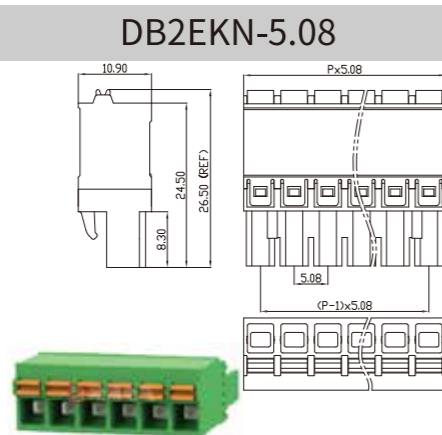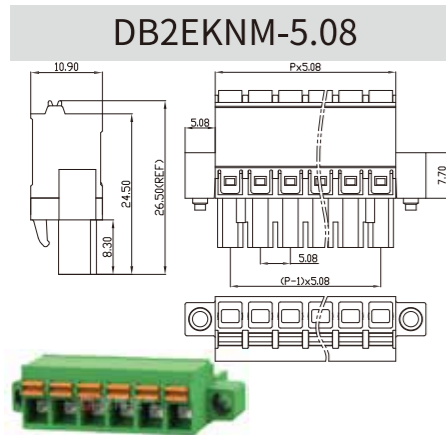

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

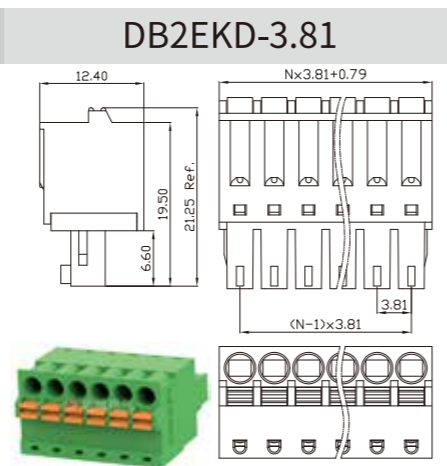
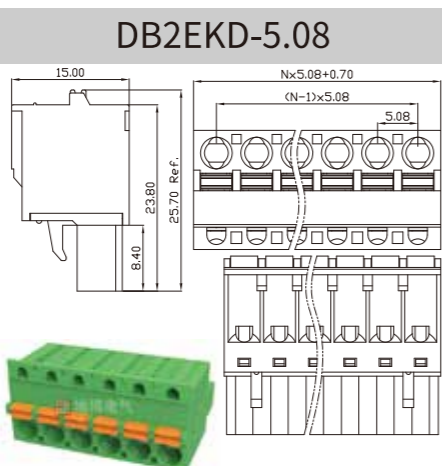
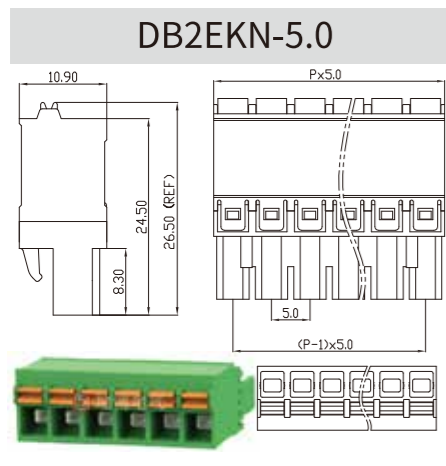


插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	-	-
额定电流 Rated Current [A]		15	-	-
接线范围 Wire Range		26-20		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		2.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

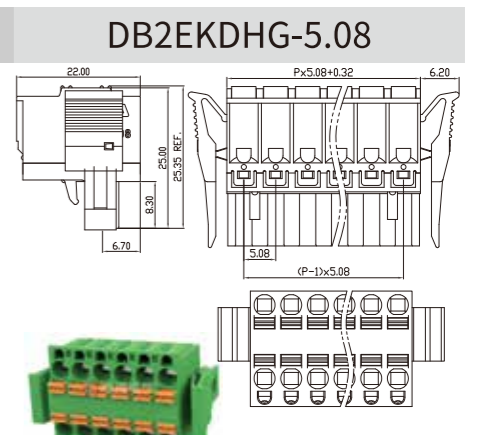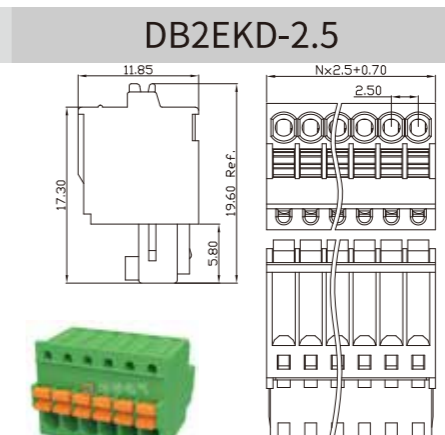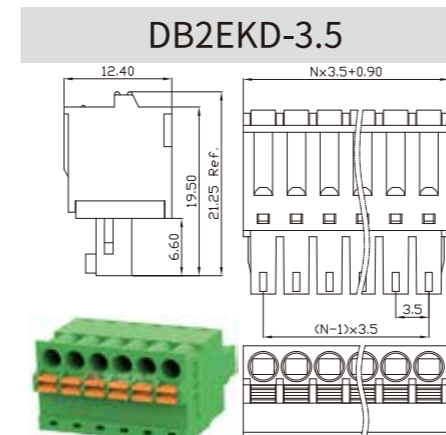

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

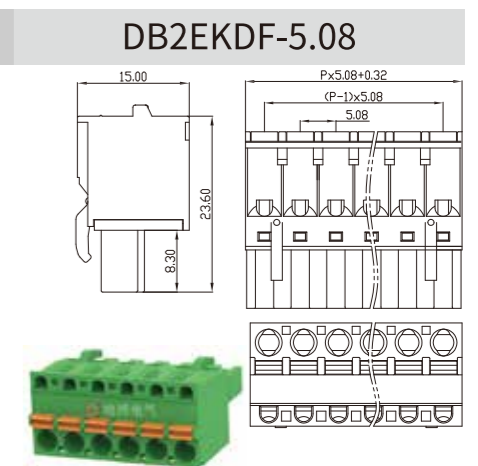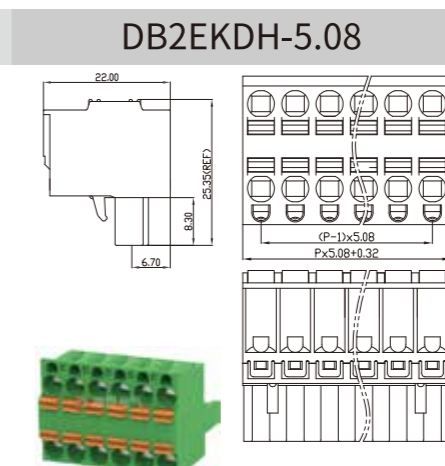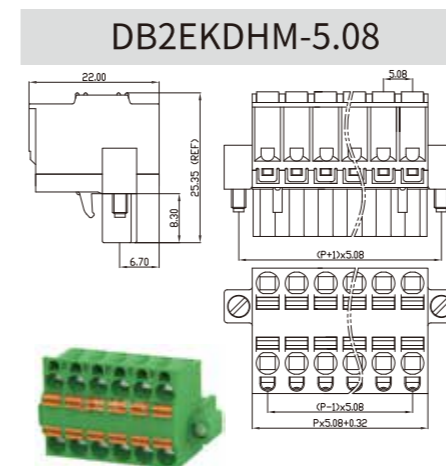

插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

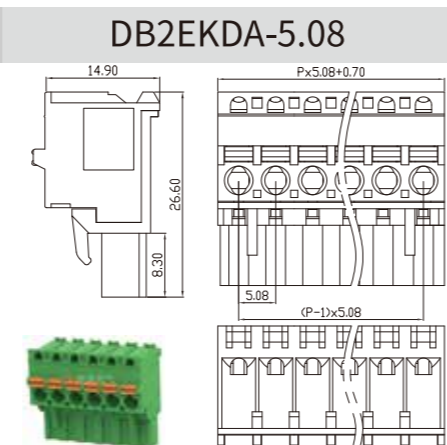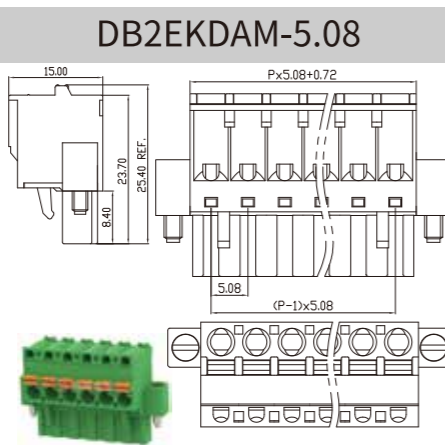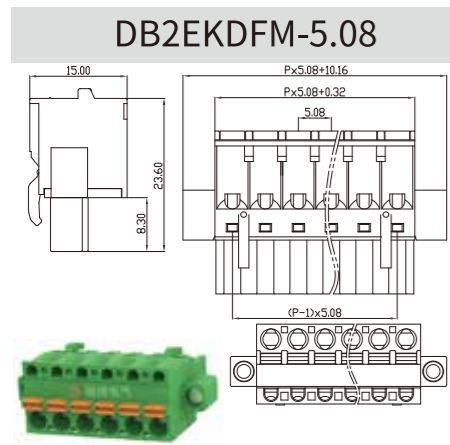

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

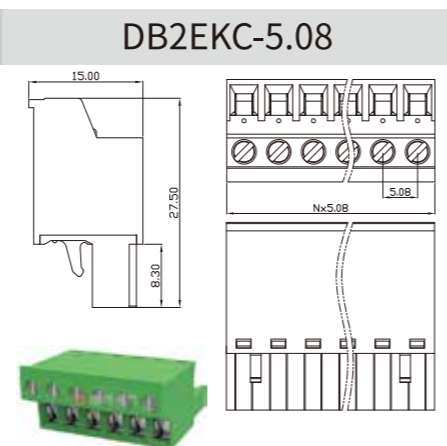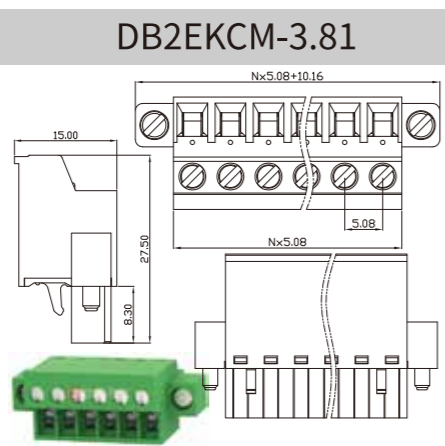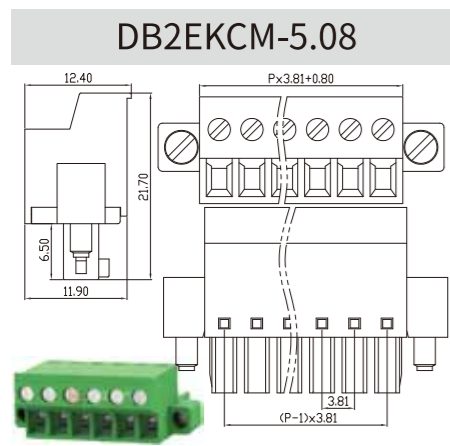

插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

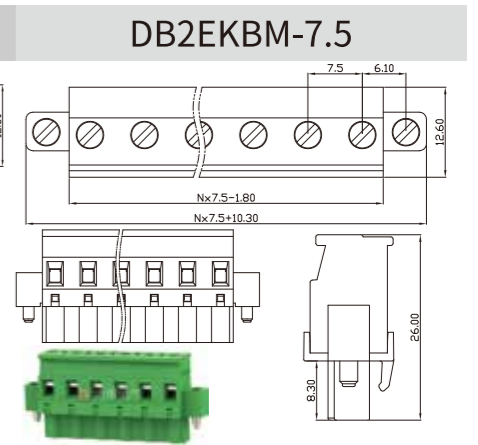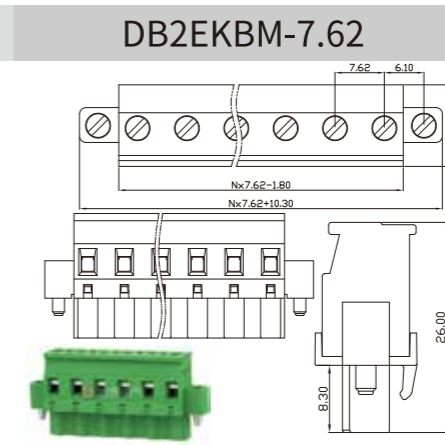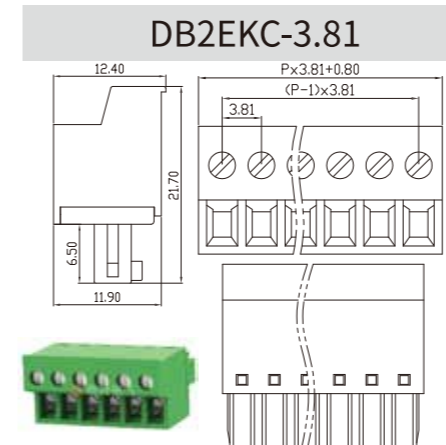

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
--------------------------------------	--	---------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

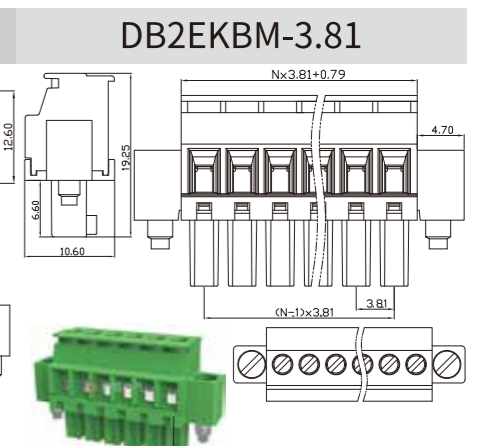
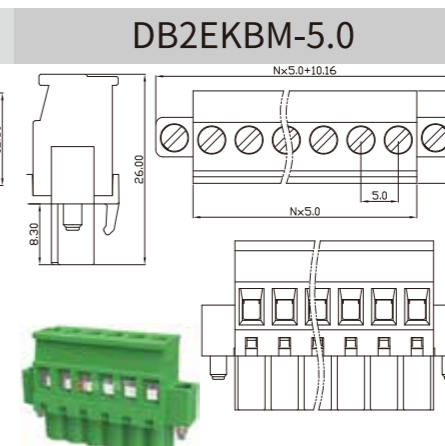
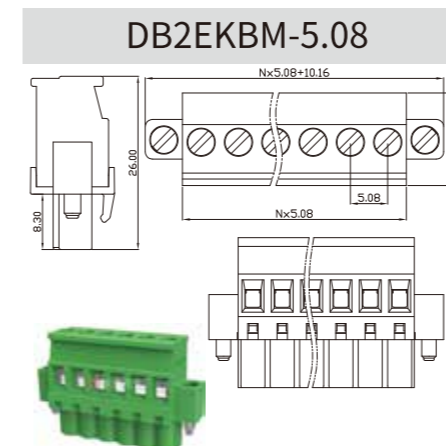


插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

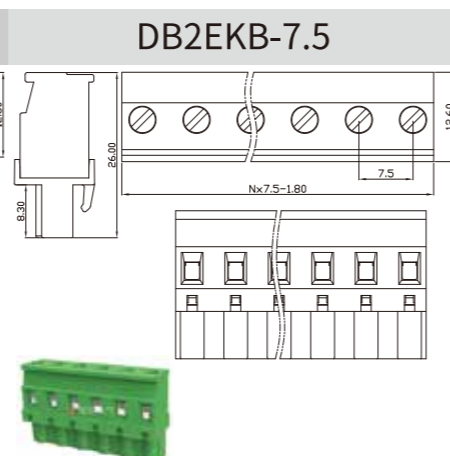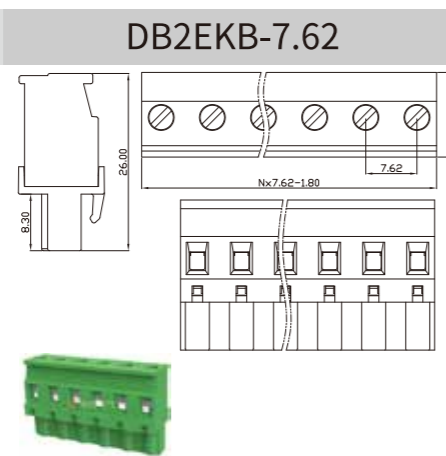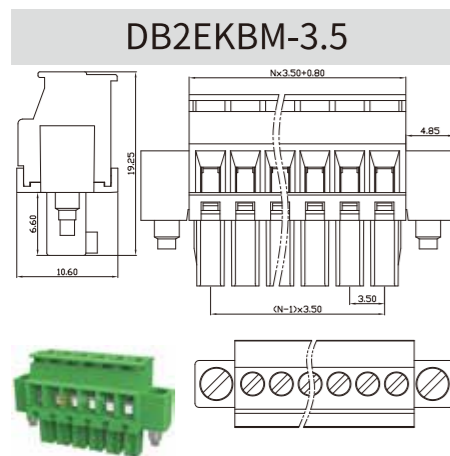

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

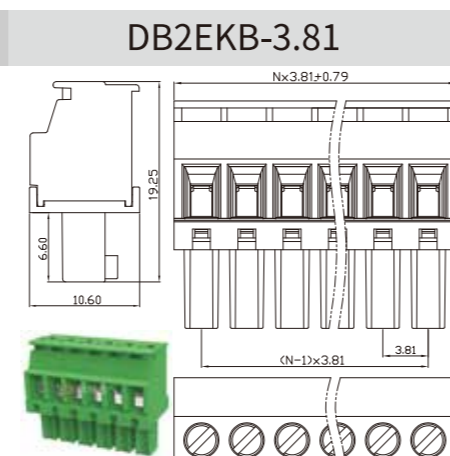
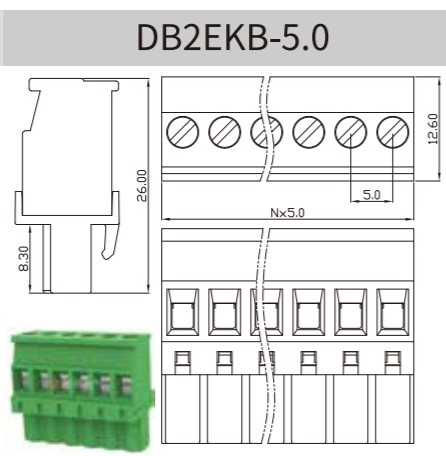
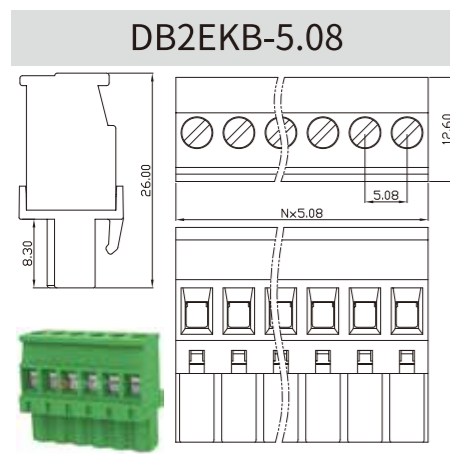


插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

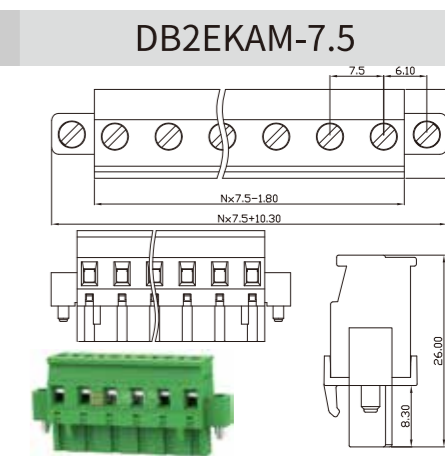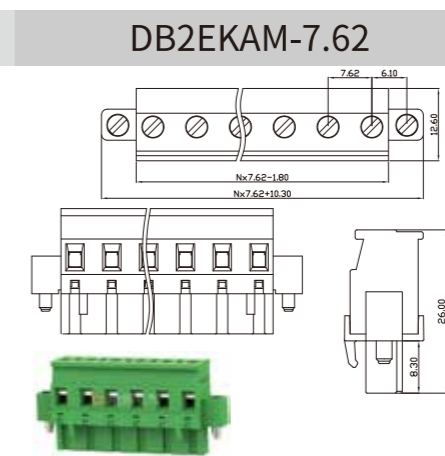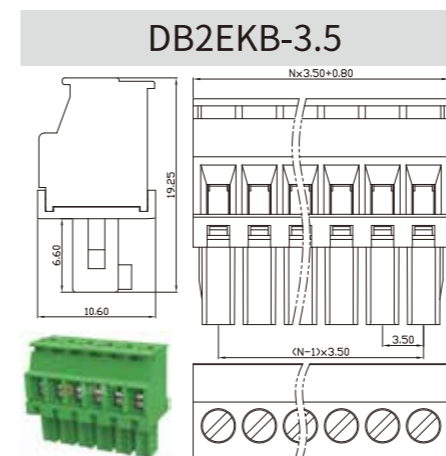

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

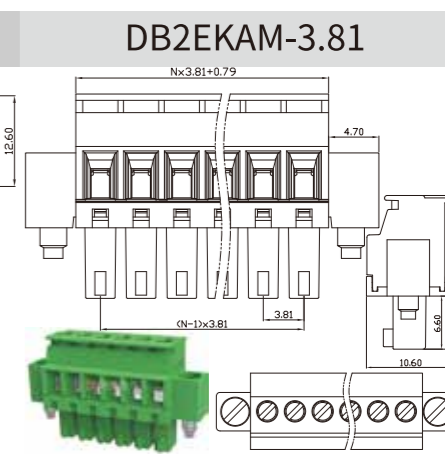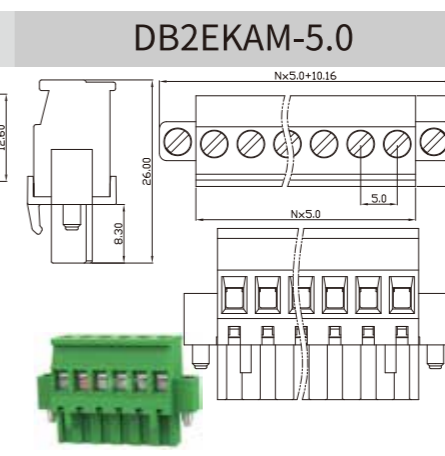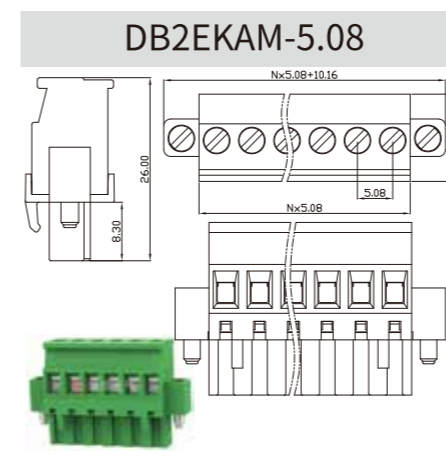


插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

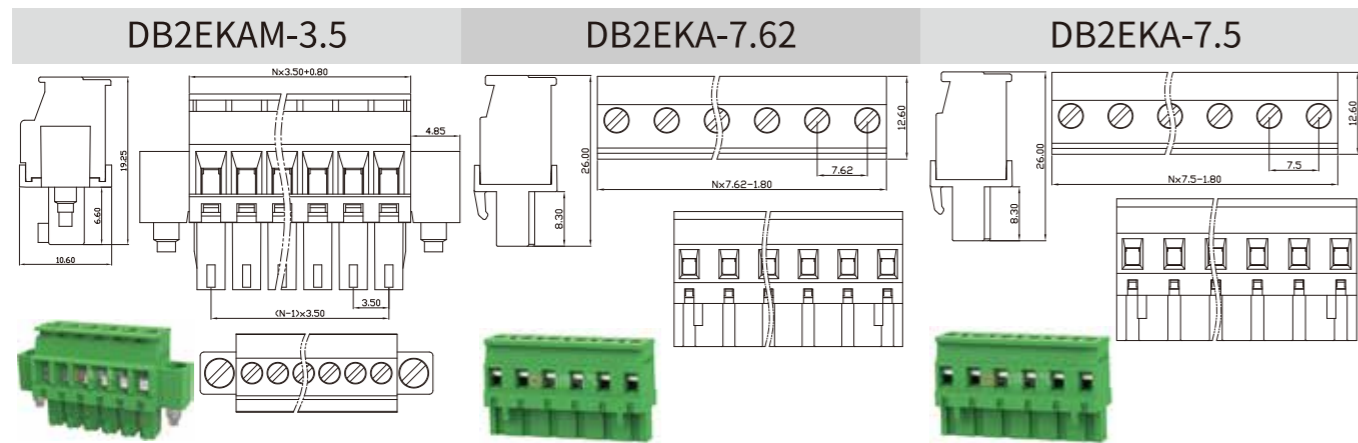


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

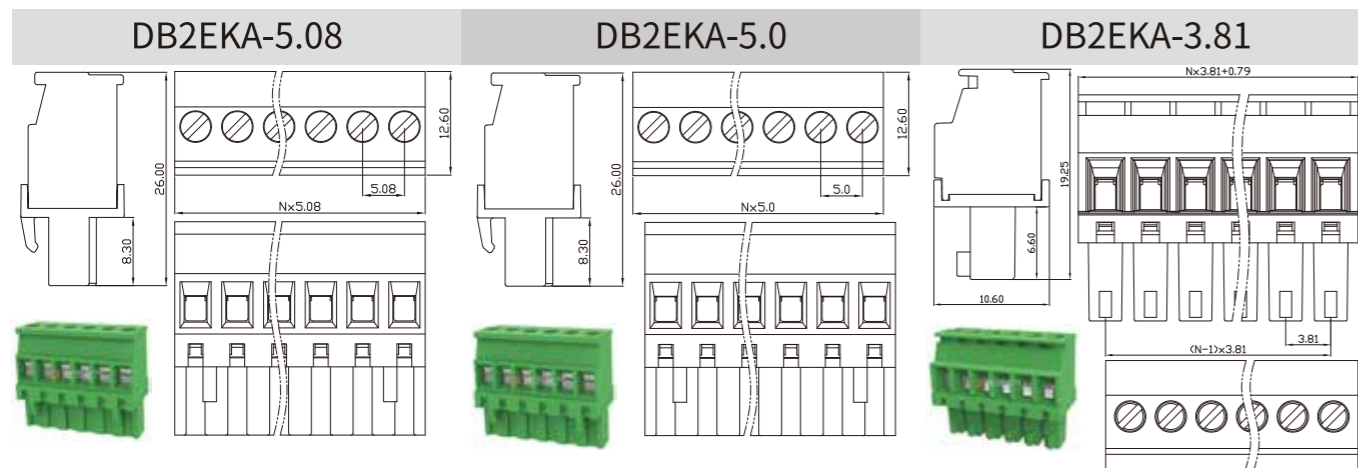


插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

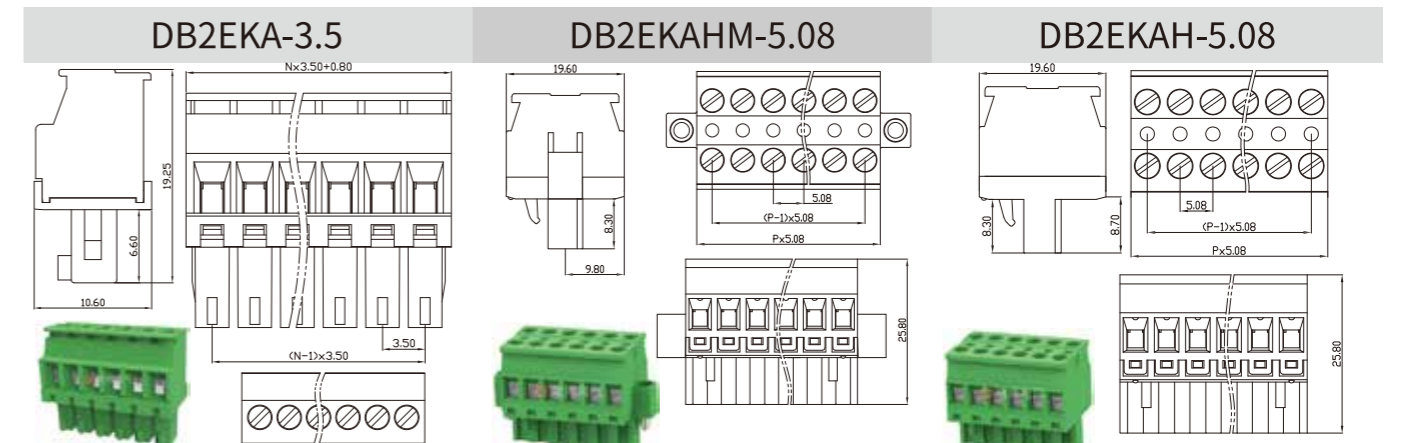

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		



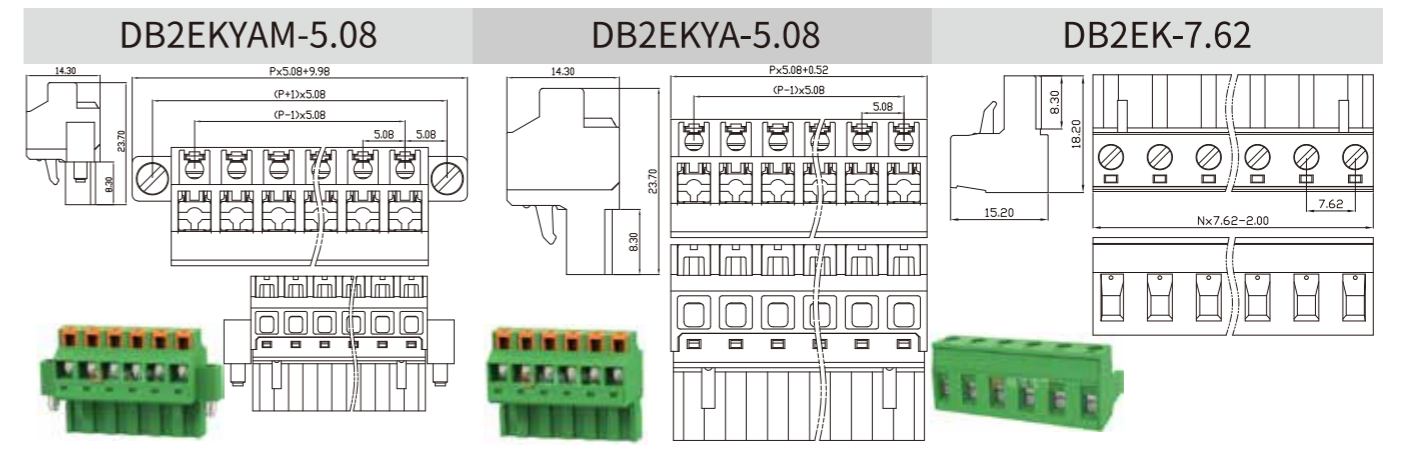


插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	28-12	28-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	7.5	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	28-12	28-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	5.0	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5	M3/0.5		




UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	28-12	28-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	5.0	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5	M3/0.5		

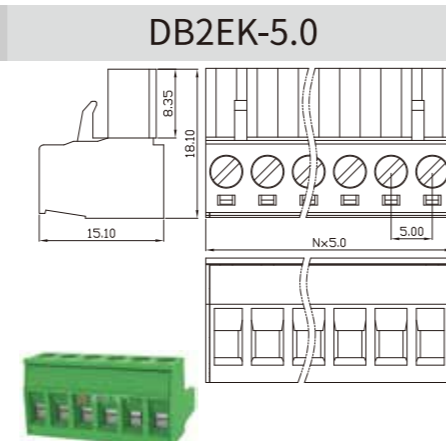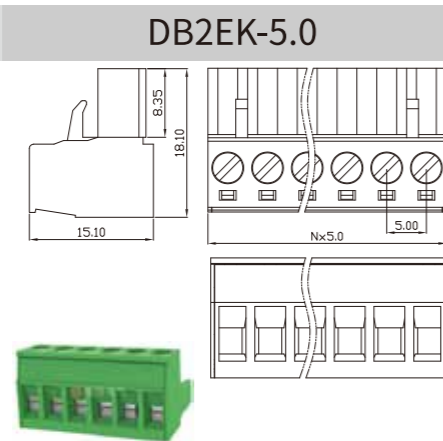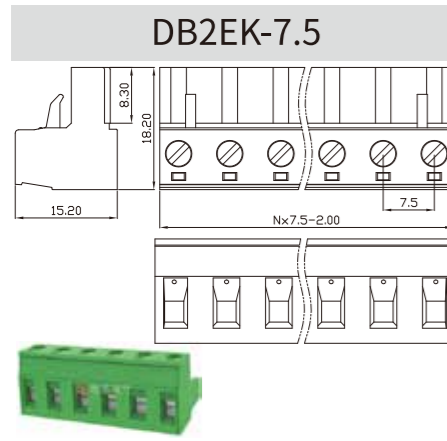

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 8	8	-	8
接线范围 Wire Range	28-16	28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	3.81	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2	M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 8	8	-	8
接线范围 Wire Range	28-16	28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	3.5	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2	M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	150 - -	150	-	-
额定电流 Rated Current [A]	50 - -	50	-	-
接线范围 Wire Range	26-20	26-20		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	2.54	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M1.6/0.1	M1.6/0.1		

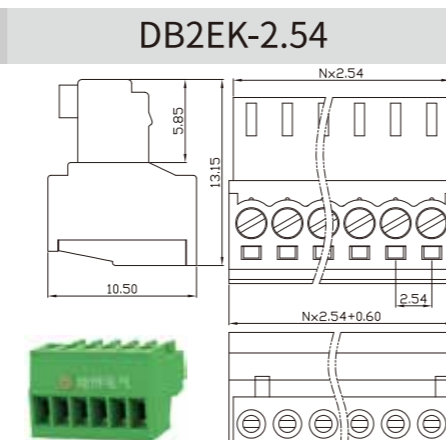
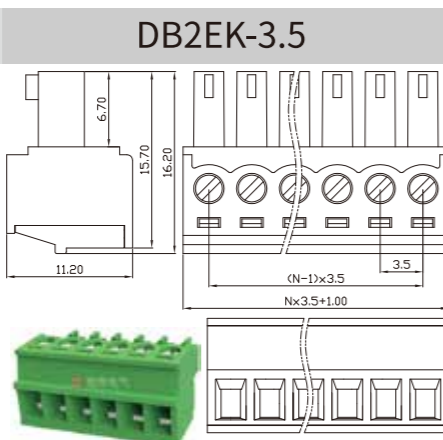
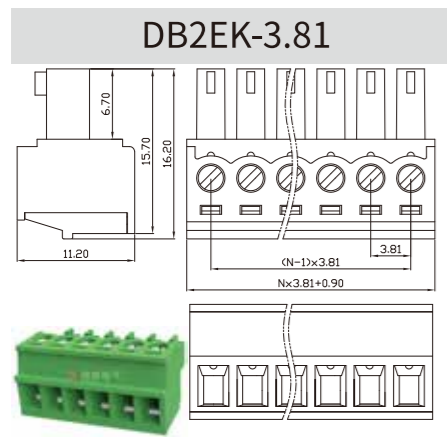


插拔式接线端子 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	150 50 -	150	50	-
额定电流 Rated Current [A]	8 8 -	8	8	-
接线范围 Wire Range	-	-		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	3.5	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	7 - 7	7	-	7
接线范围 Wire Range	24-14	24-14		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	5.0	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		


UL/CUL 技术参数 UL/CUL Technical Data		cULus		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	10 - 10	10	-	10
接线范围 Wire Range	24-12	24-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	5.08	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	0.4	0.4		

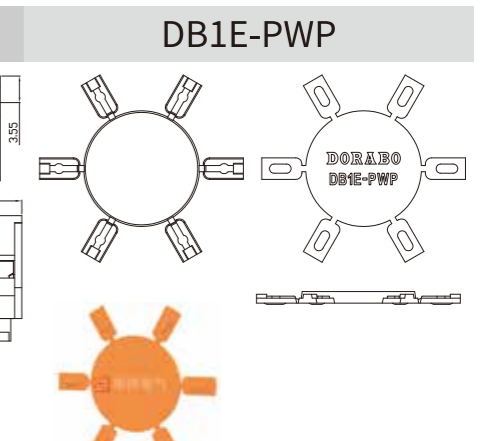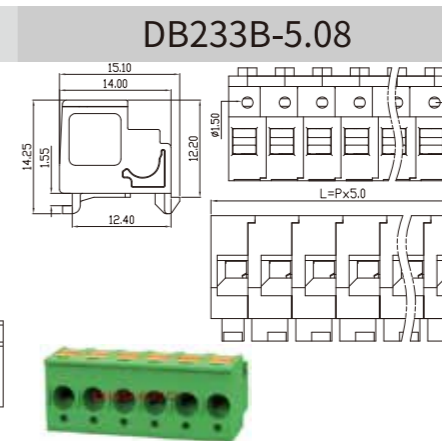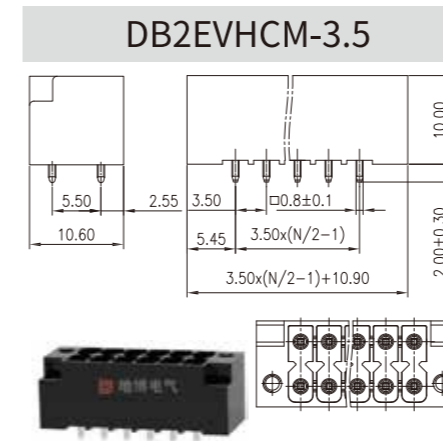

Barrier terminal block

栅栏式接线端子

The design of the fence type terminal block provides multiple specifications of foot pitch options ranging from 6.35 to 13mm. Various specifications can be paired with various terminals, corresponding to a voltage of 150-600V. The current is 10~40A. The product provides double-sided and three-sided partition designs for convenient protection and guidance of different circuit wiring. The product design complies with IEC60998 International standards such as UL1059. We have obtained CQC certification in China and UL certification in the United States.



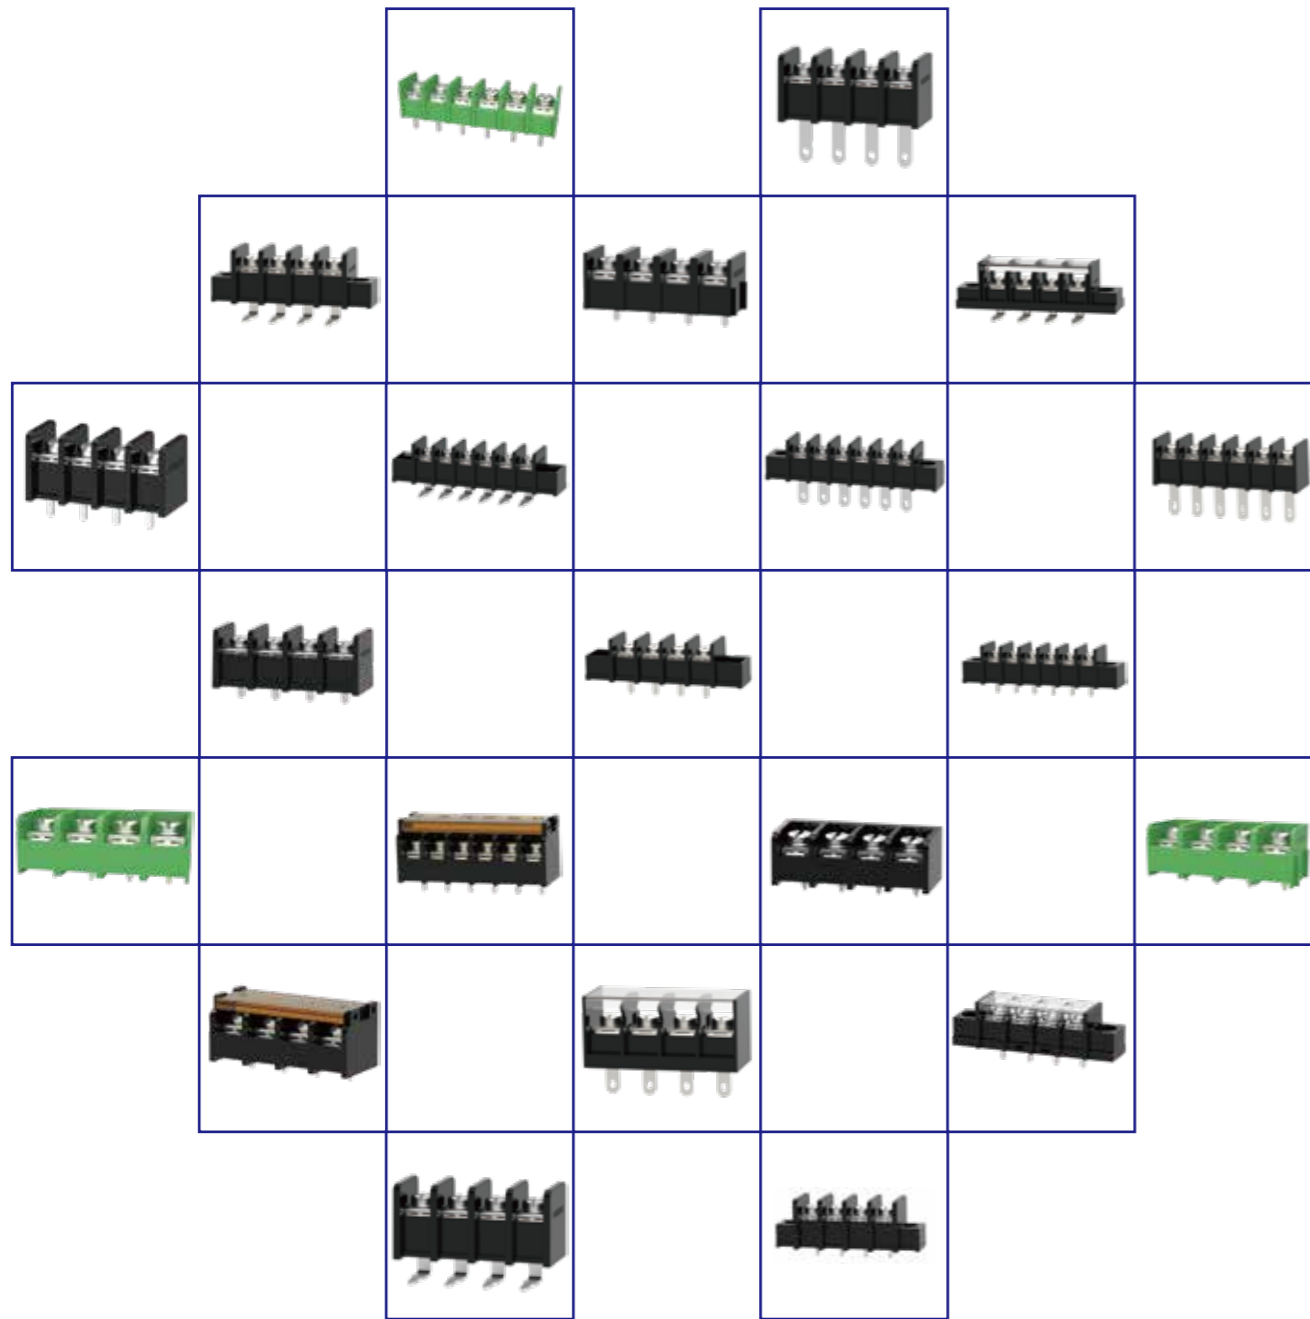


栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	300
额定电流 Rated Current [A]		30	30	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		11.11		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	150	300
额定电流 Rated Current [A]		30	30	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		11.00		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

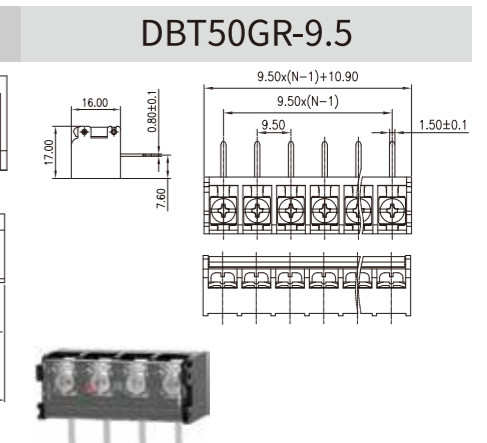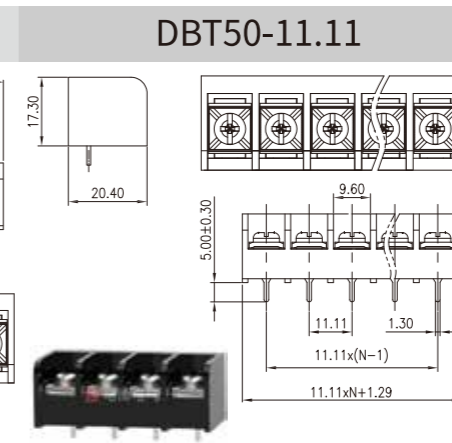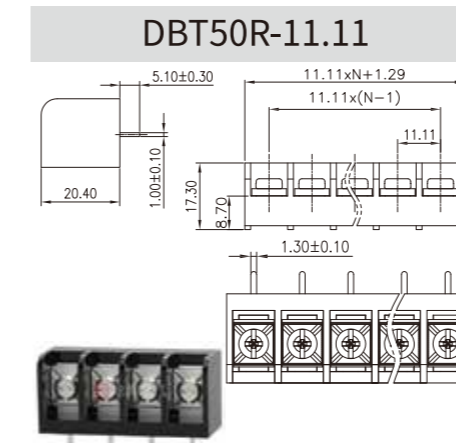

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]		22-14		
间距 Pitch [mm]		8.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]		22-14		
间距 Pitch [mm]		8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

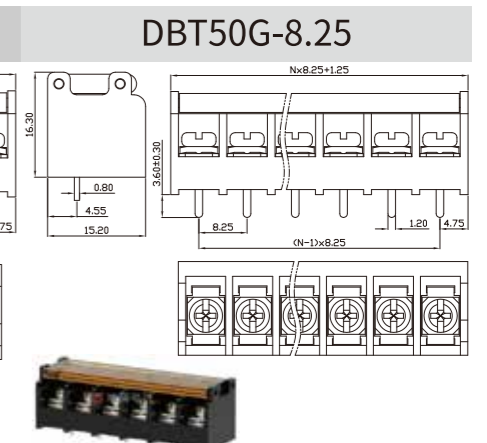
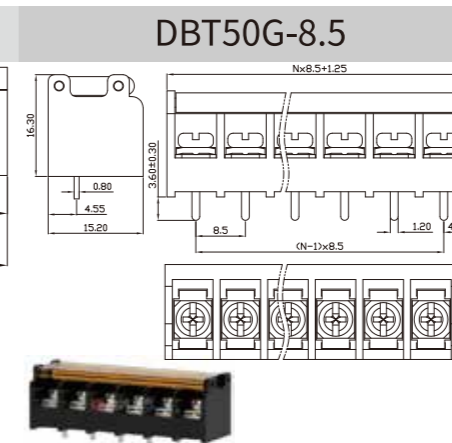
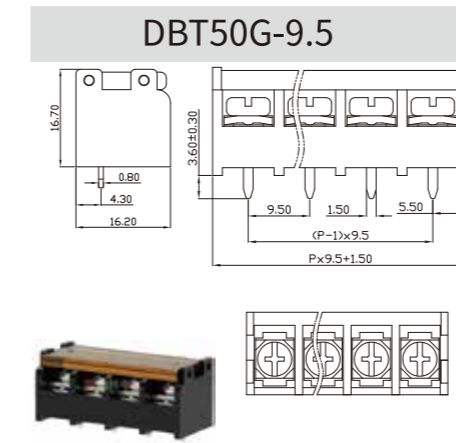


栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]		22-14		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		22-16		
单/多芯线 Solid/Stranded [AWG]		22-16		
间距 Pitch [mm]		6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

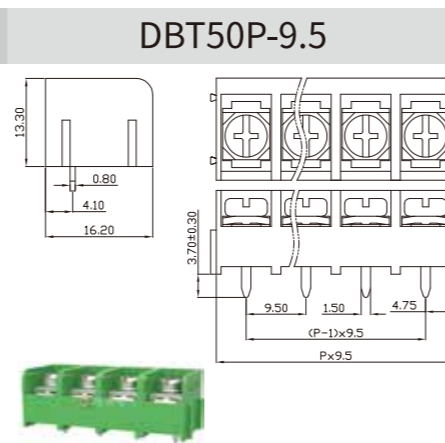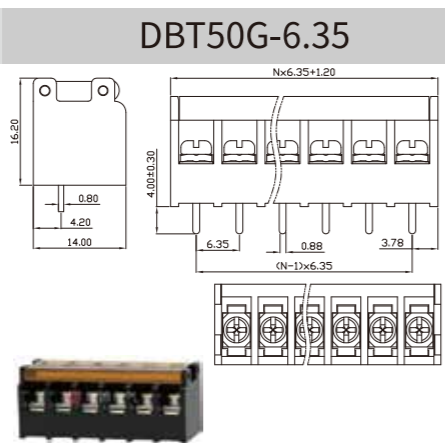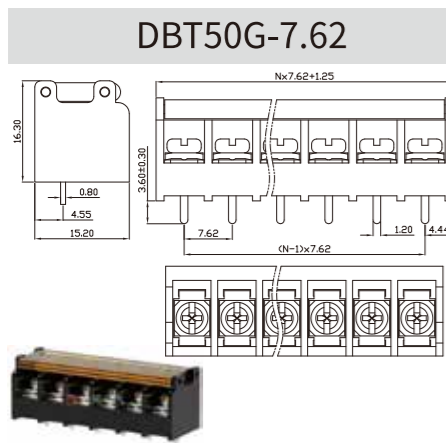

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	150	300
额定电流 Rated Current [A]		20	20	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M4/1.2		

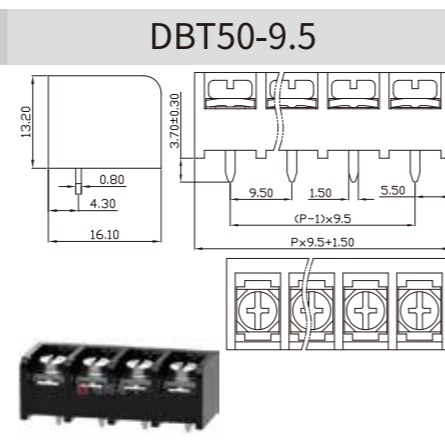
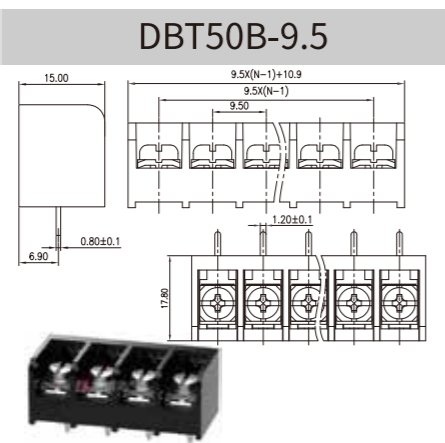
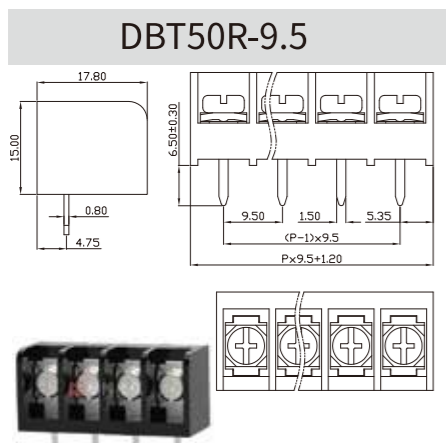


栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		8.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M./0.8		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.8		




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

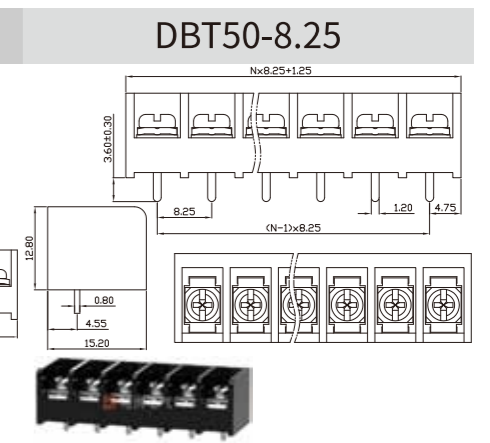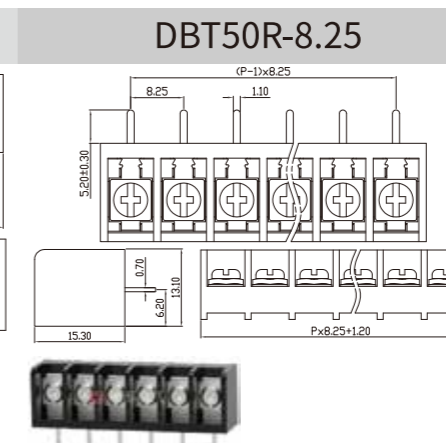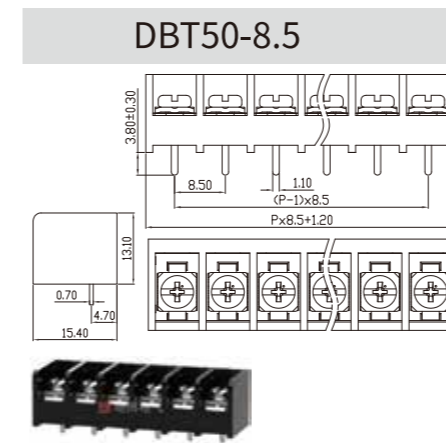

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		22-10		
单/多芯线 Solid/Stranded [AWG]		22-10		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		22-16		
单/多芯线 Solid/Stranded [AWG]		22-16		
间距 Pitch [mm]		6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		20	-	-
接线范围 Wire Range		22-12		
单/多芯线 Solid/Stranded [AWG]		22-12		
间距 Pitch [mm]		3.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.8		

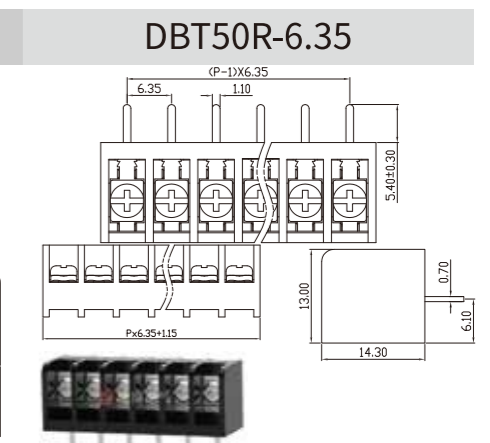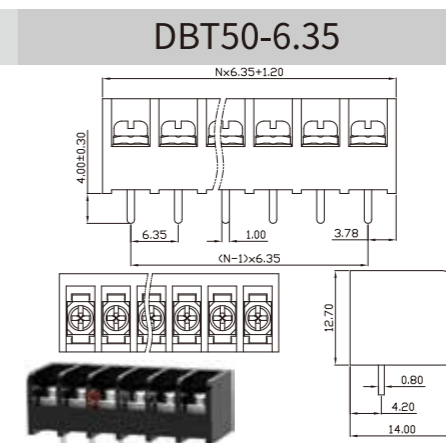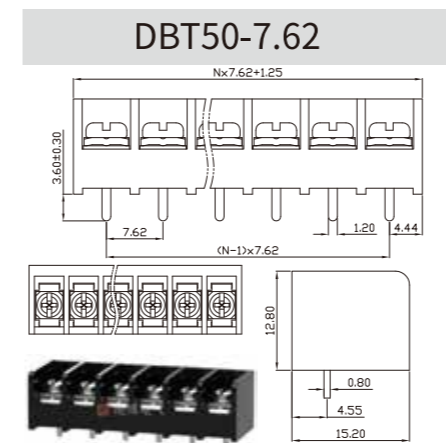

栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	22-16		
单/多芯线 Solid/Stranded [AWG]	22-16		
间距 Pitch [mm]	6.35		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	65	-	-
接线范围 Wire Range	14-6		
单/多芯线 Solid/Stranded [AWG]	14-6		
间距 Pitch [mm]	16.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M6/3.0		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	40	-	5
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	13.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


DBT50P-6.35

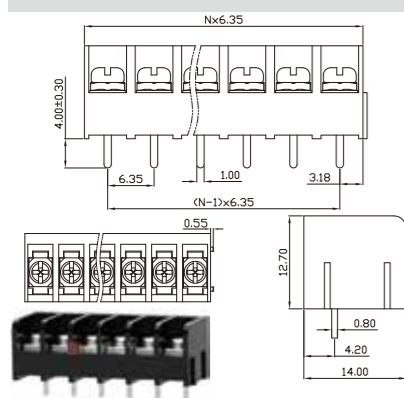


DBT40CC-16.0

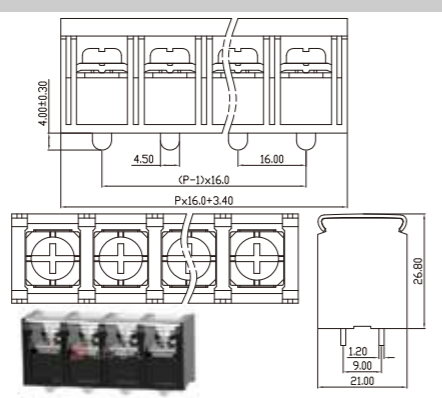


DBT40RM-13.0

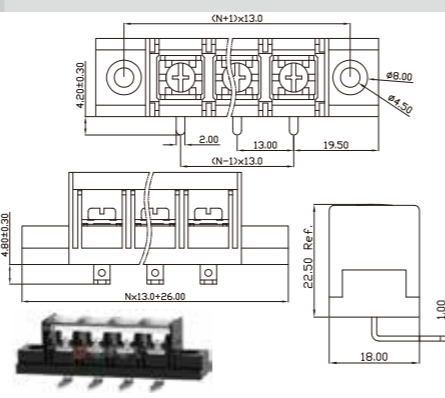


DBT40R-13.0

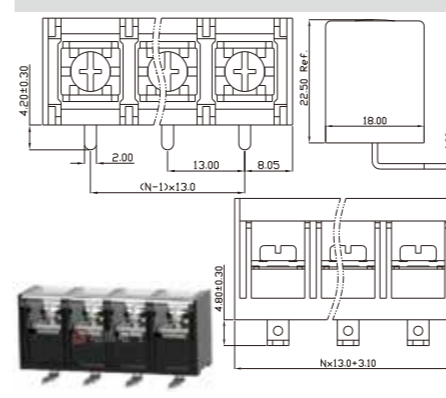

DBT40H-13.0

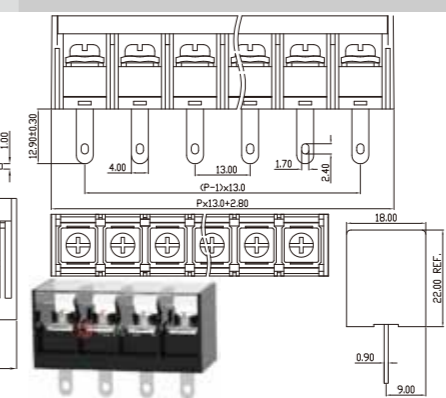

DBT40S-13.0

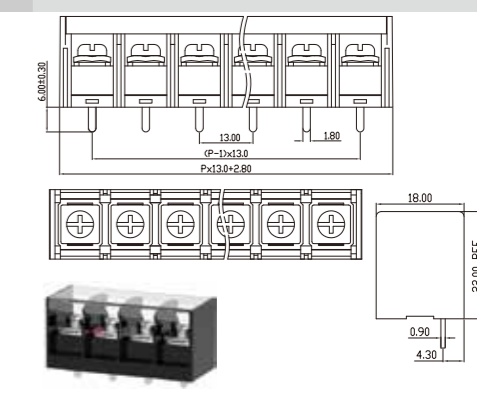

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-0		
单/多芯线 Solid/Stranded [AWG]	18-0		
间距 Pitch [mm]	13.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-0		
单/多芯线 Solid/Stranded [AWG]	18-0		
间距 Pitch [mm]	13.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-0		
单/多芯线 Solid/Stranded [AWG]	18-0		
间距 Pitch [mm]	13.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	13.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-12		
单/多芯线 Solid/Stranded [AWG]	18-12		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		


DBT40HM-13.0

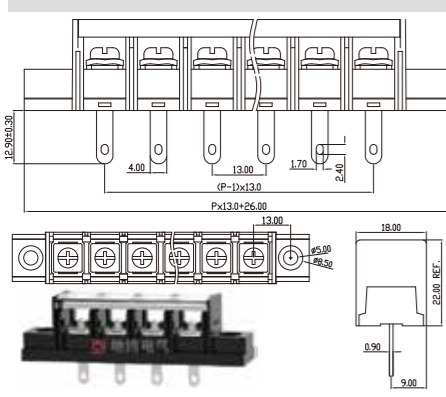


DBT40SM-13.0

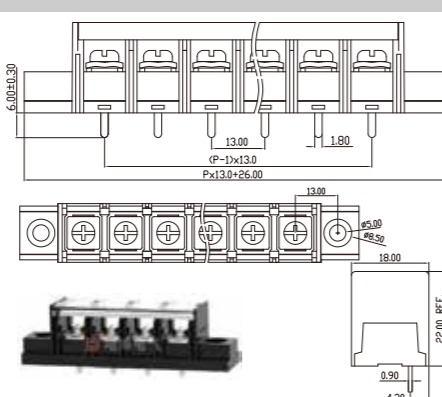


DBT40CM-13.0

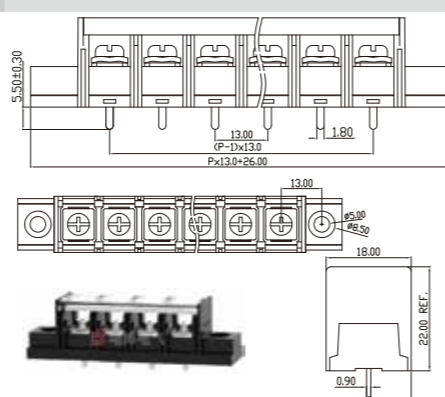


DBT40C-13.0

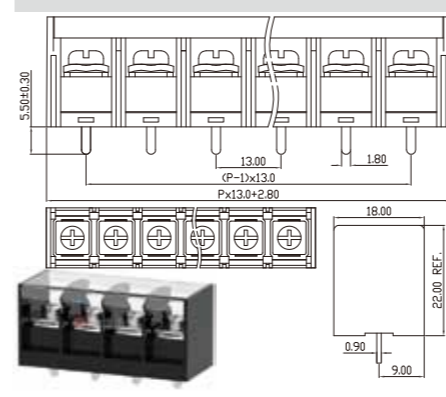

DBT40RM-11.0

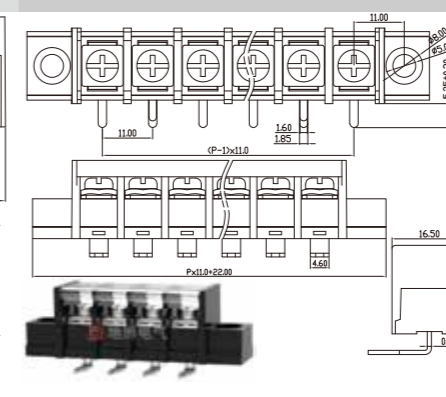

DBT40HM-11.0

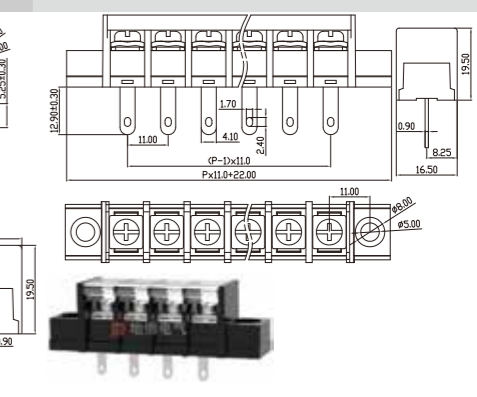

栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	40	-	5
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	13.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	13.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/1.4		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	13.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

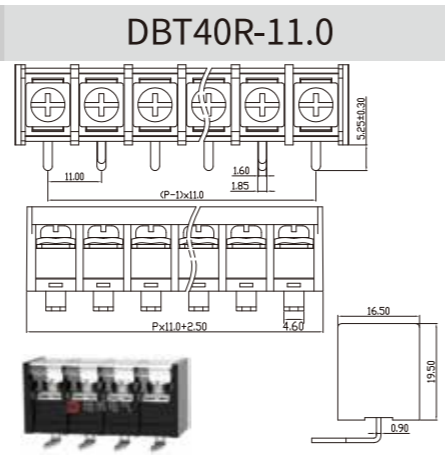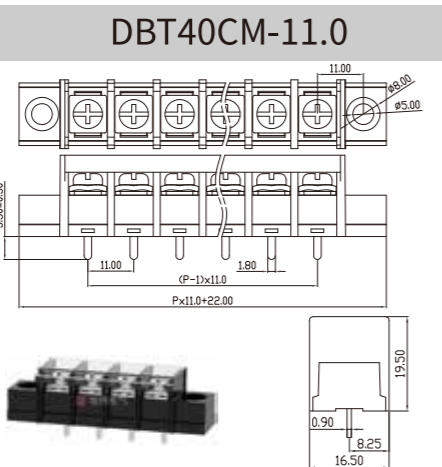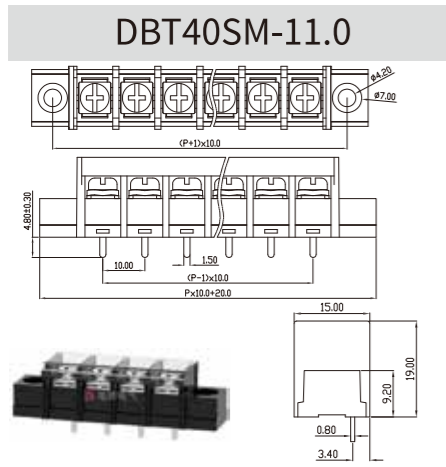

UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

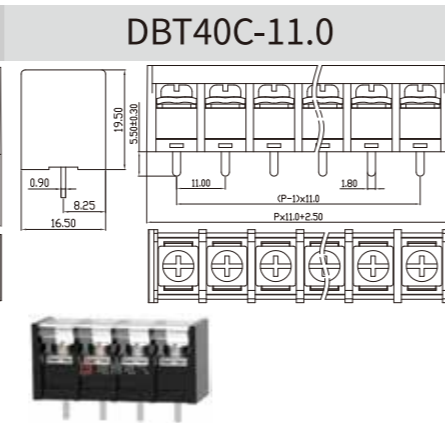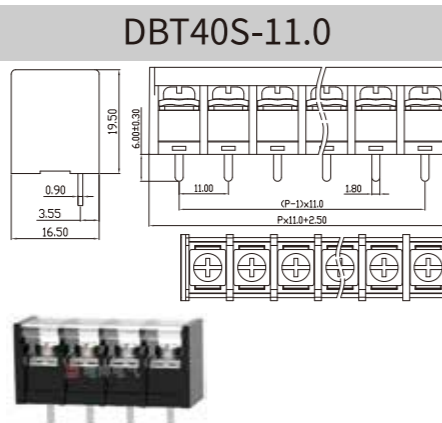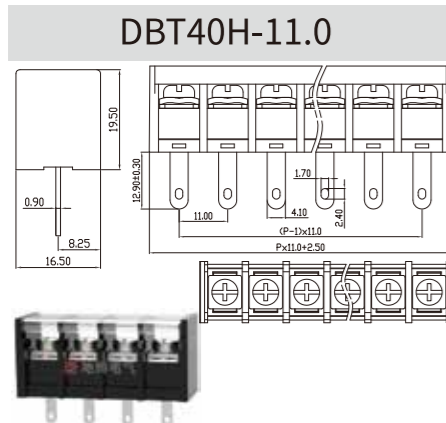

栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

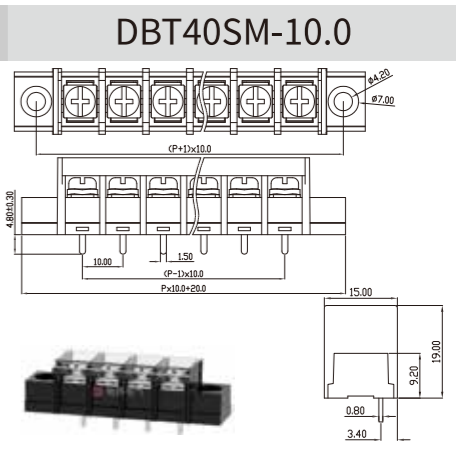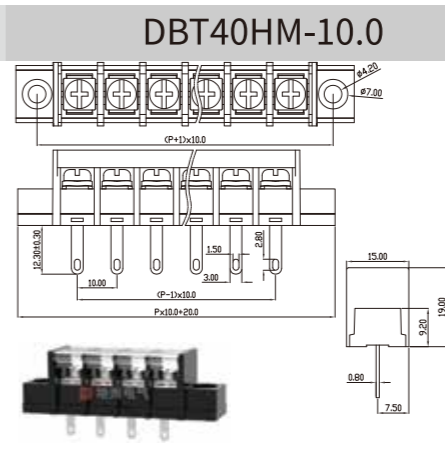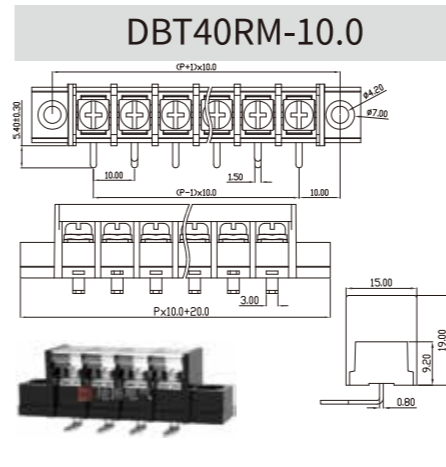

UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

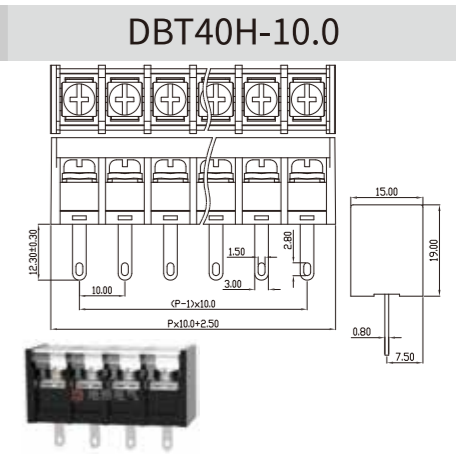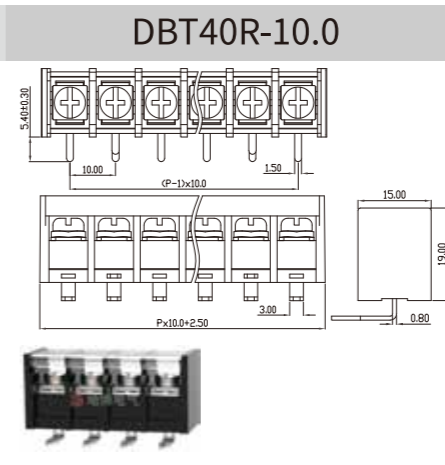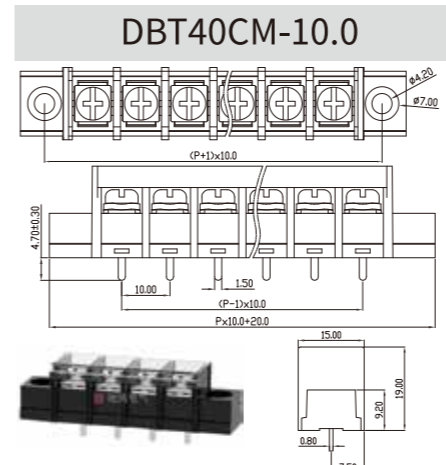

栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	230	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

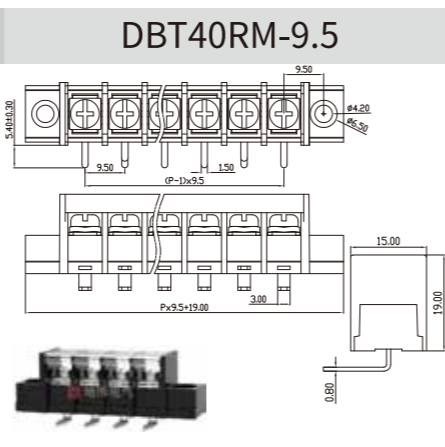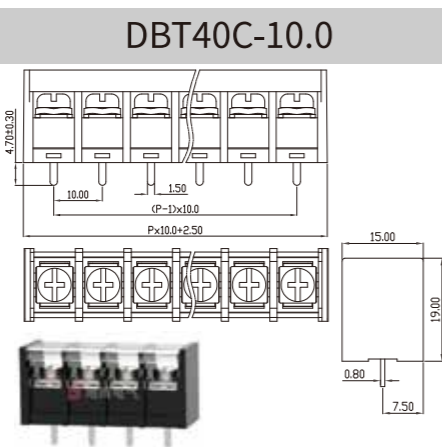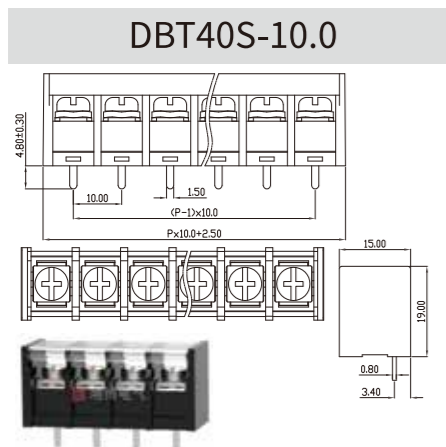

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-10		
单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-10		
单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

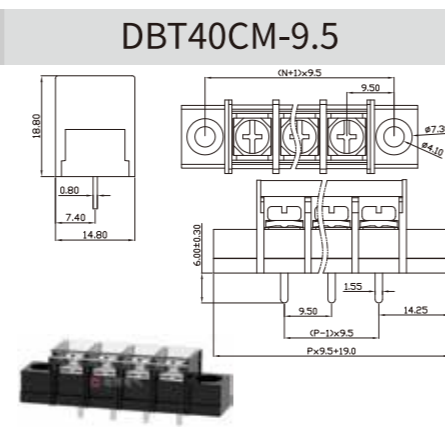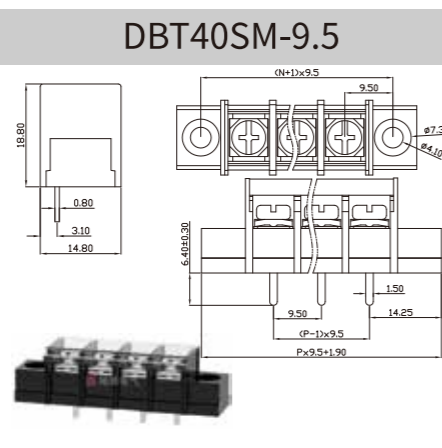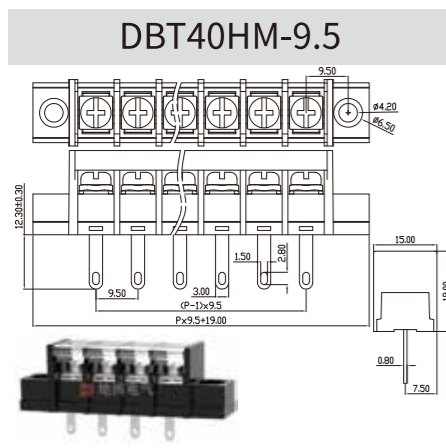

栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

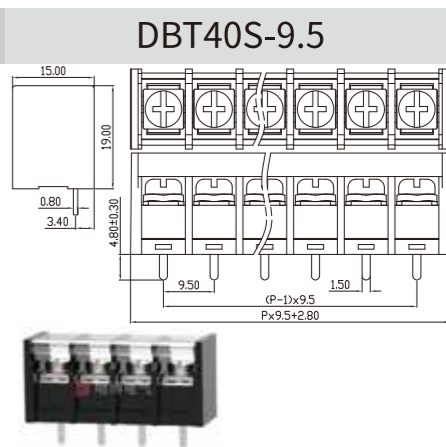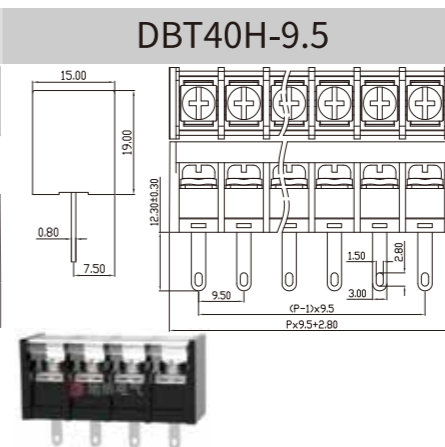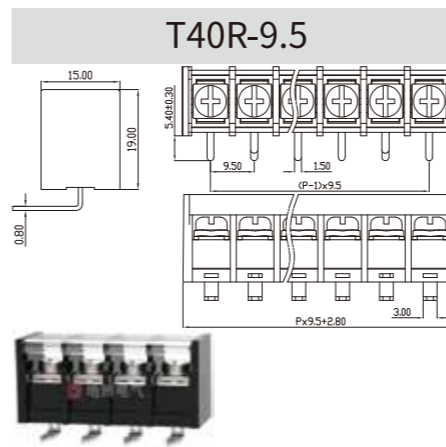

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

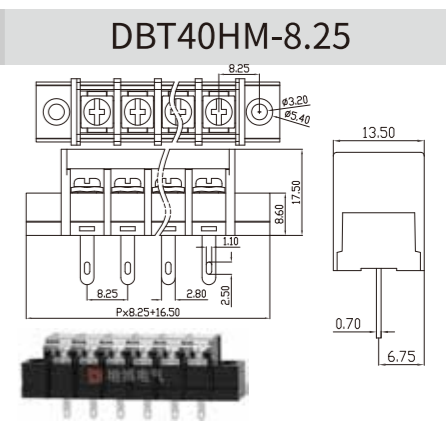
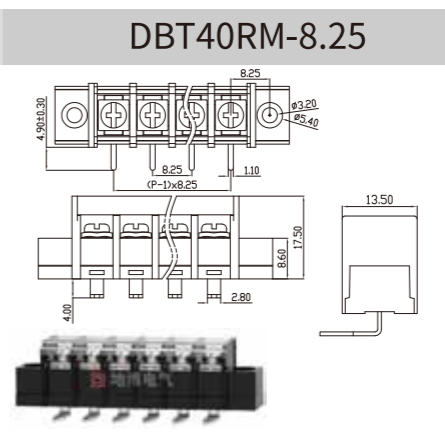
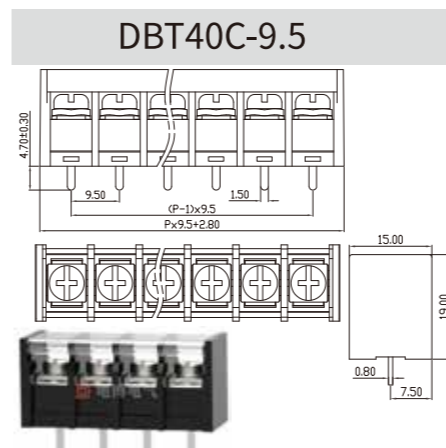


栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	8.25			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	8.25			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	8.25			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

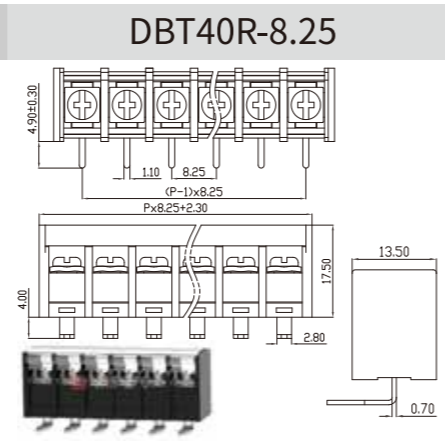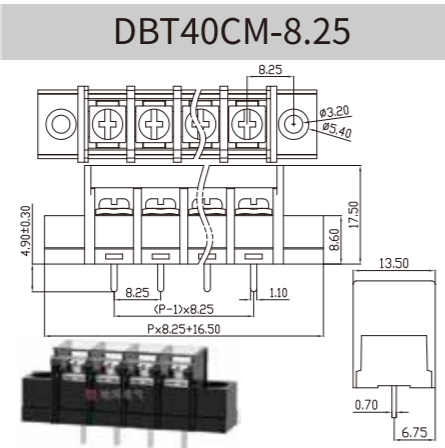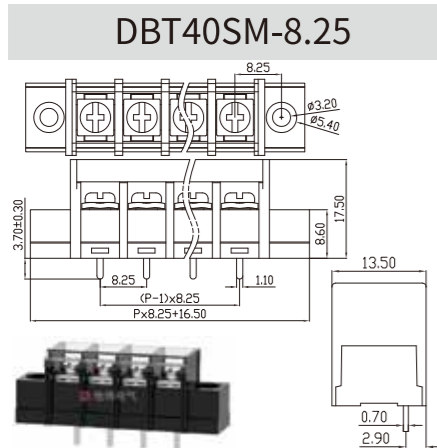

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	8.25			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	8.25			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	8.25			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

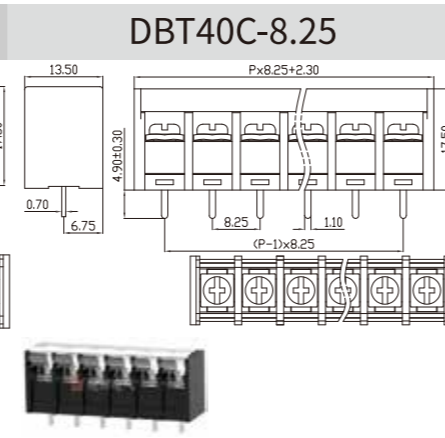
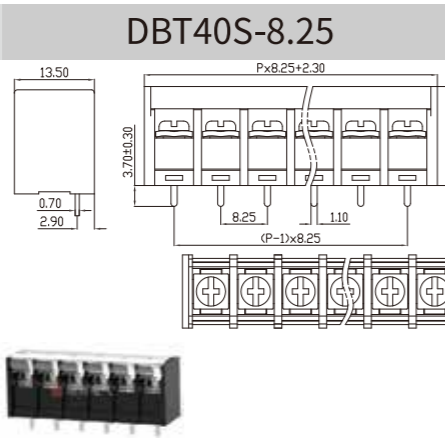
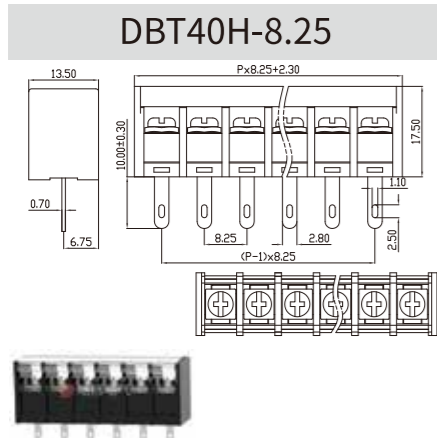


栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	7.62			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	7.62			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	7.62			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

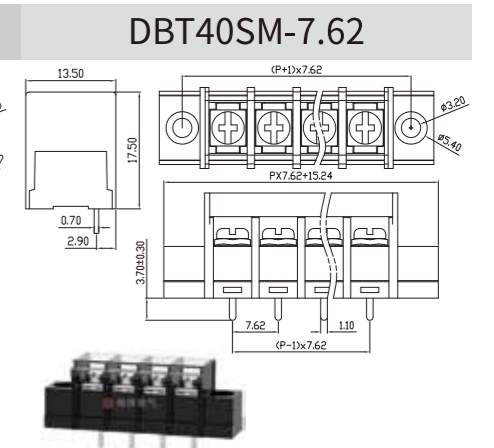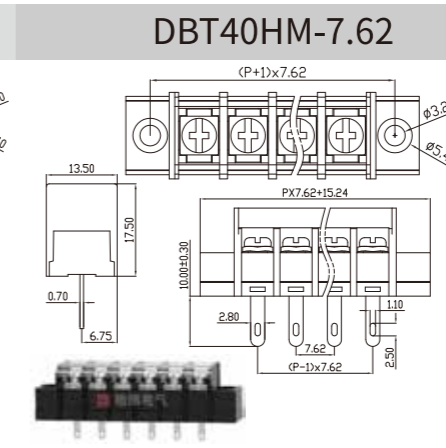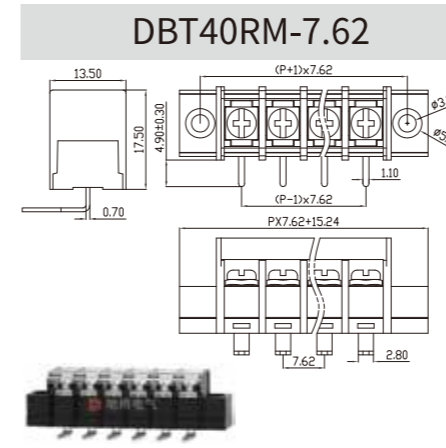

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	15 - -			
接线范围 Wire Range	22-14			
单/多芯线 Solid/Stranded [AWG]	22-14			
间距 Pitch [mm]	7.62			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	7.62			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group	B C D			
额定电压 Rated Voltage [V]	300 - -			
额定电流 Rated Current [A]	20 - -			
接线范围 Wire Range	22-12			
单/多芯线 Solid/Stranded [AWG]	22-12			
间距 Pitch [mm]	7.62			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8			

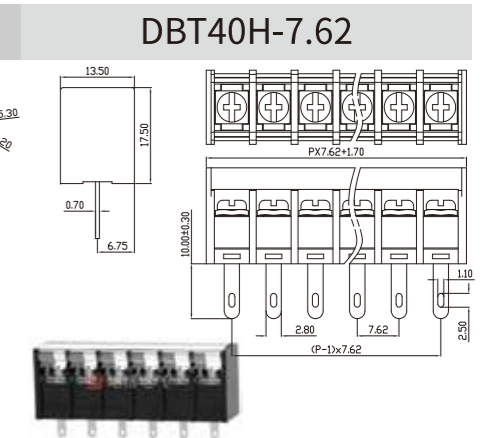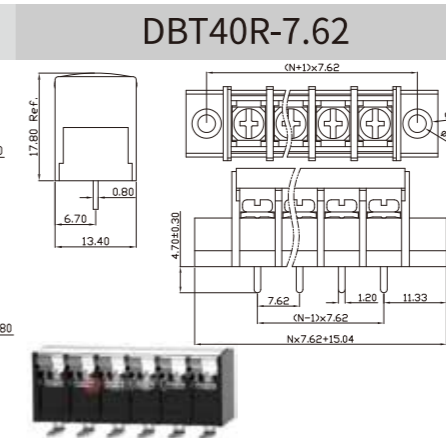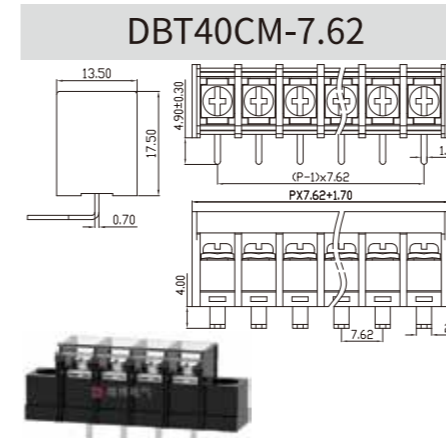

栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		


UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range	22-14		
单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	30	-	5
接线范围 Wire Range	22-10		
单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


DBT40S-7.62

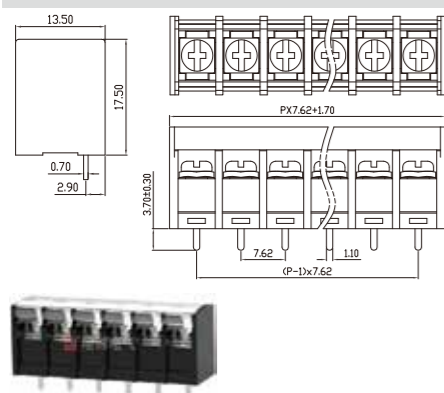


DBT40C-7.62

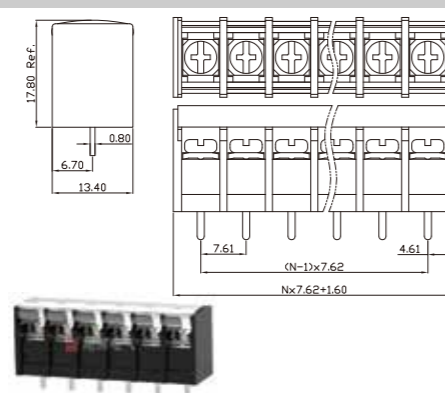


DBT30RM-11.0

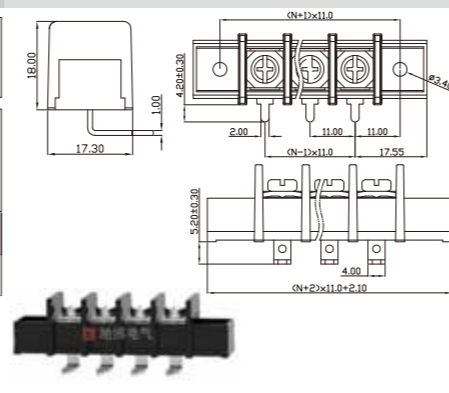


DBT30R-11.0

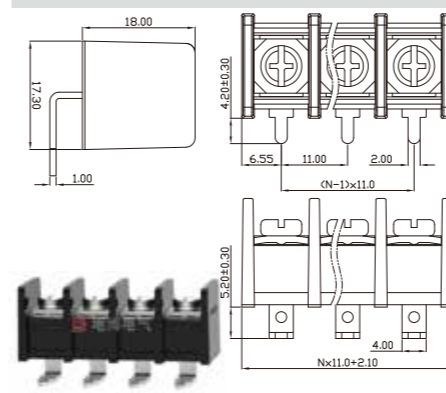

DBT30H-11.0

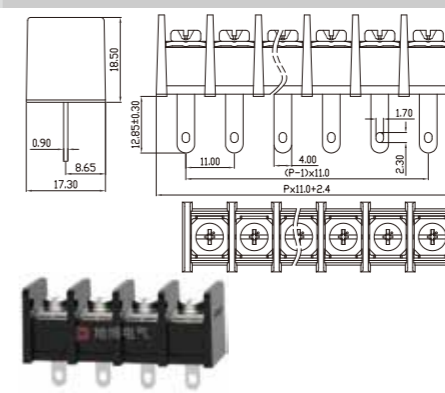

DBT30S-11.0

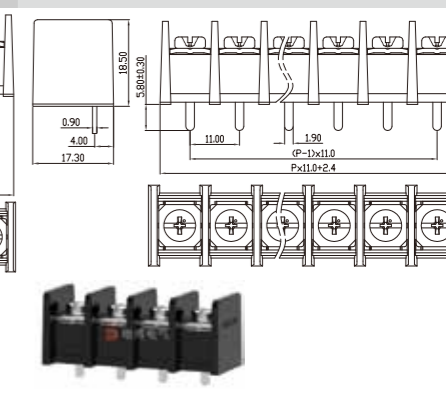

UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	30	-	5
接线范围 Wire Range	22-10		
单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	600
额定电流 Rated Current [A]	30	-	5
接线范围 Wire Range	22-10		
单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		


UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	11.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		


DBT30HM-11.0

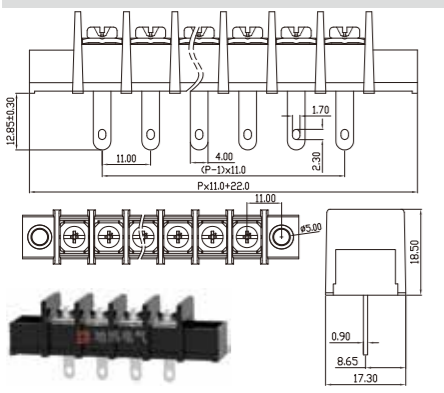


DBT30SM-11.0

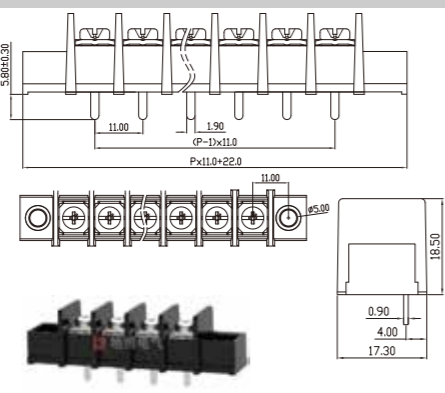


DBT30CM-11.0

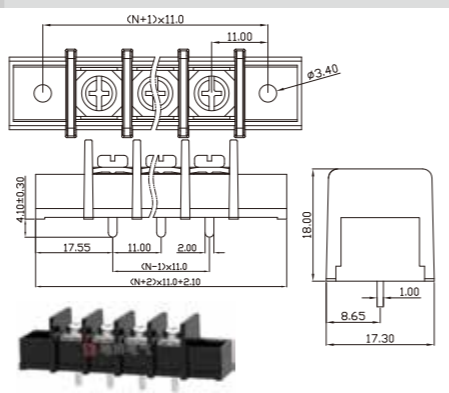


DBT30C-11.0

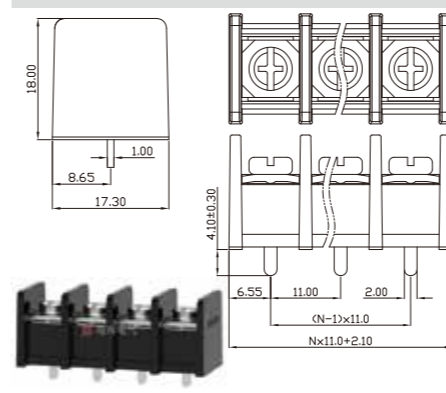

DBT30RM-10.0

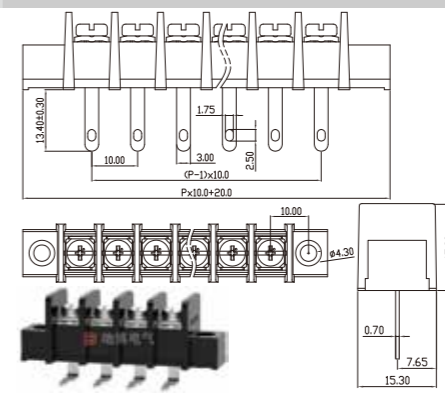

DBT30HM-10.0

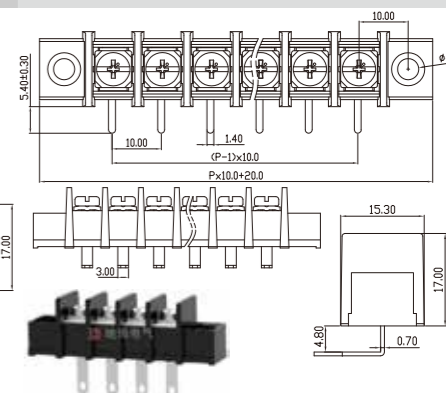

栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	18-10		
单/多芯线 Solid/Stranded [AWG]	18-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-10		
单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


DBT30SM-10.0

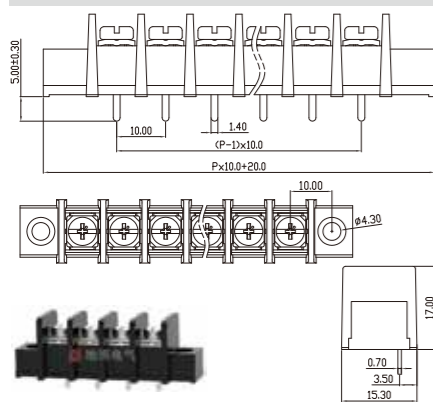

DBT30CM-10.0

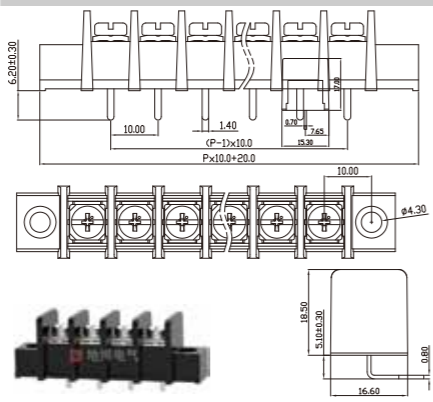

DBT30R-10.0

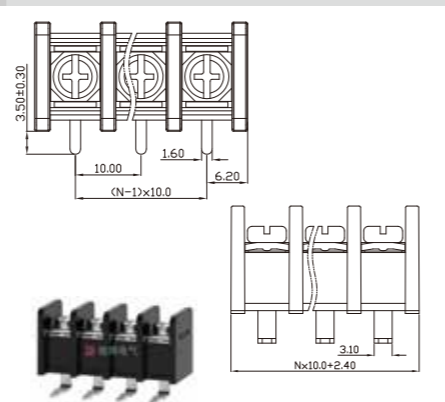

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-10		
单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-10		
单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-10		
单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


DBT30H-10.0

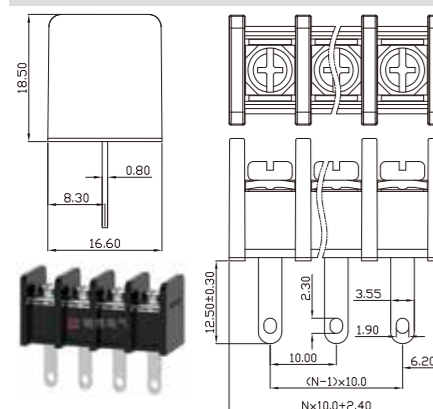

DBT30S-10.0

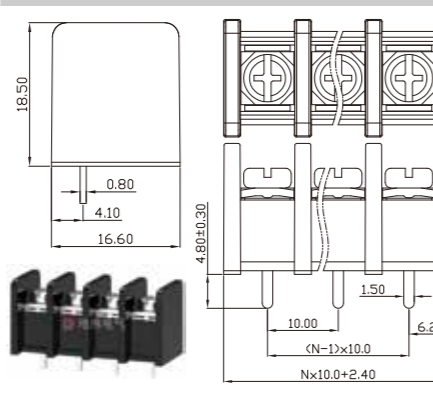

DBT30C-10.0

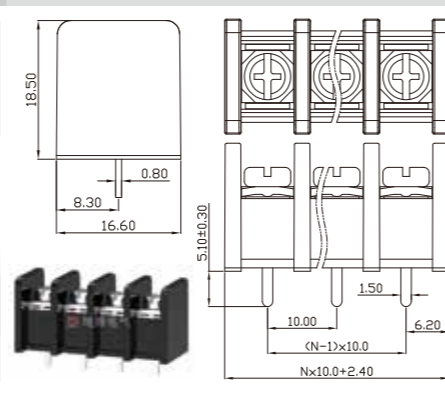

栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		


DBT30RM-9.5

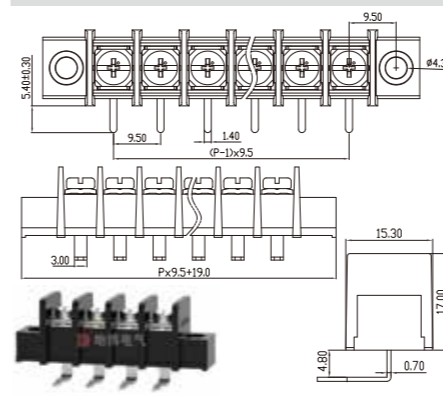

DBT30HM-9.5

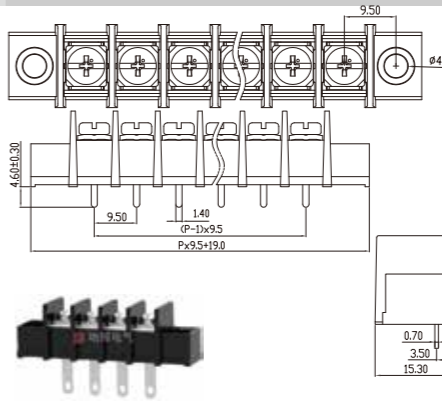

DBT30SM-9.5

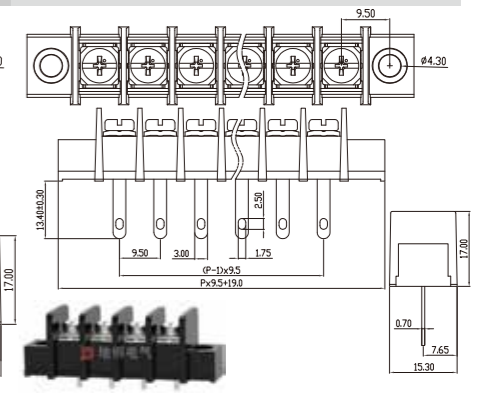

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.0		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-10		
单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-10		
单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		


DBT30CM-9.5

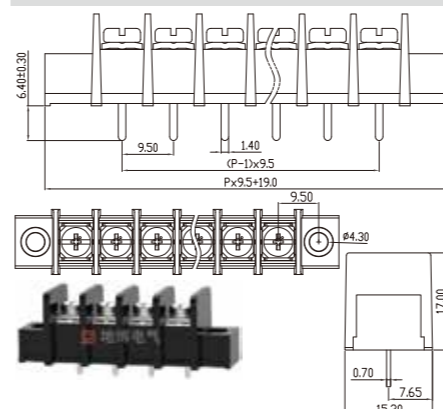

DBT30R-9.5

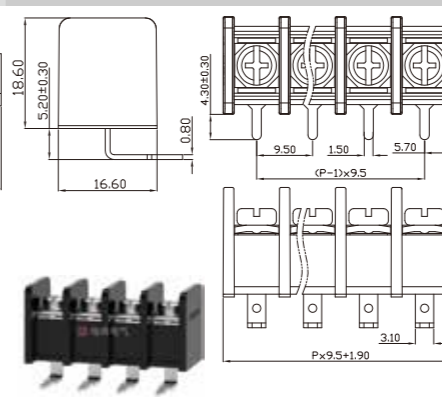

DBT30H-9.5

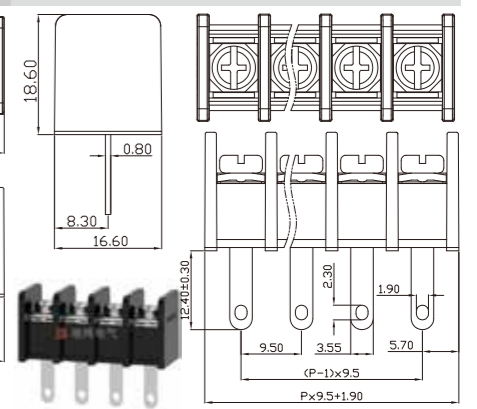

栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-10		
单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	10
接线范围 Wire Range	22-10		
单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	9.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

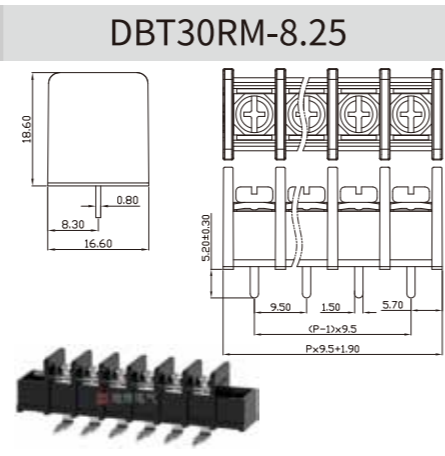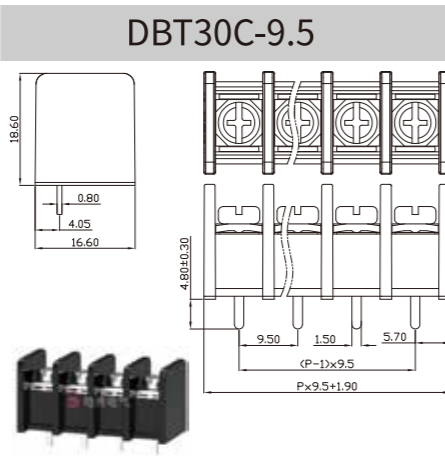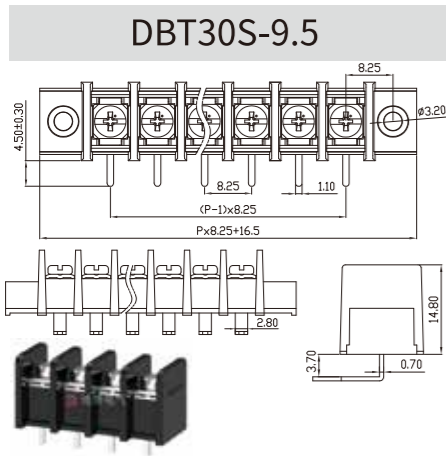

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-10		
单/多芯线 Solid/Stranded [AWG]	22-10		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

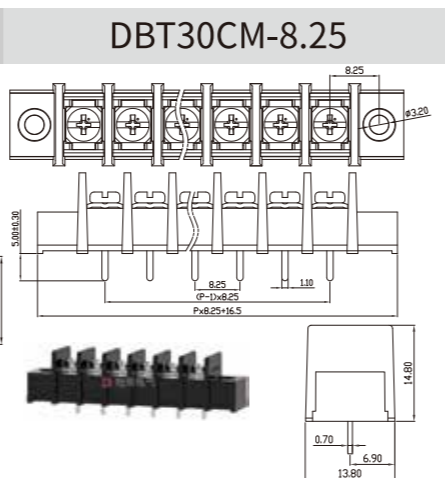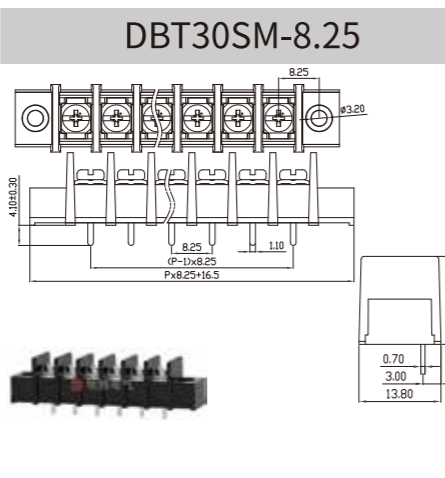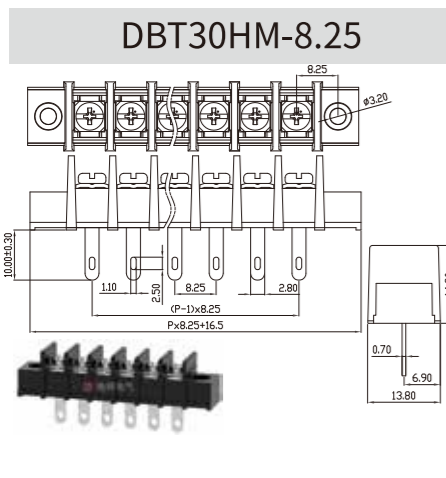

栅栏式接线端子 Barrier terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	12	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

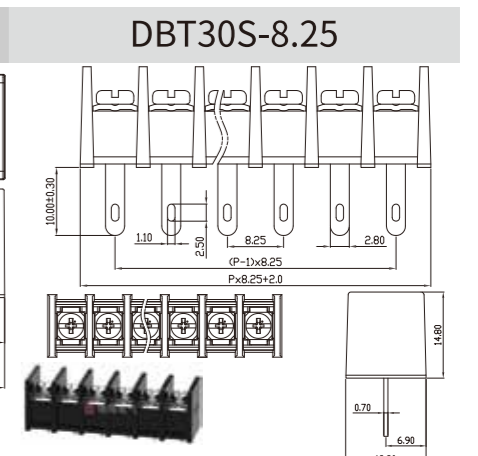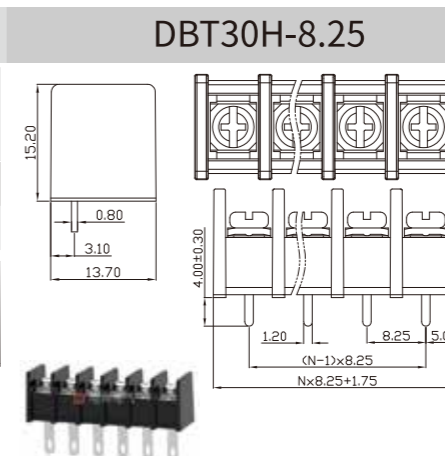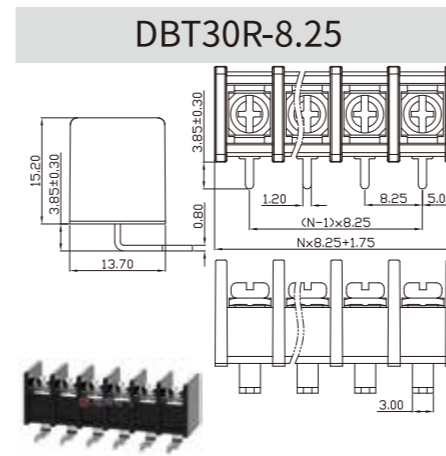

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	8.25		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	15	-	-
接线范围 Wire Range	22-14		
单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C _{RU} US		
--------------------------------------	--------------------	--	--


等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	20	-	-
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.8		

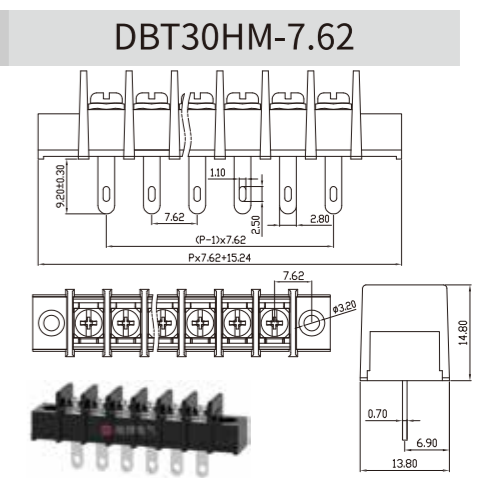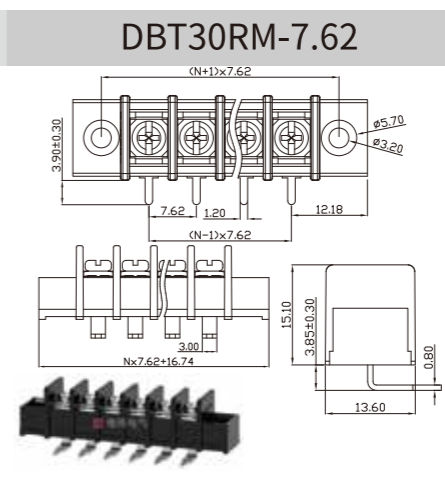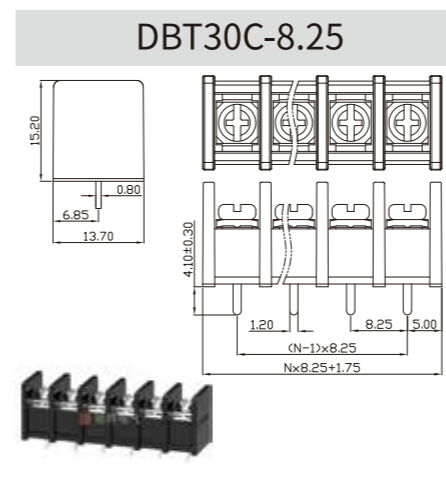

Spring-type terminal block

弹簧式接线端子

Spring type PCB wiring terminals, with cage and V-shaped spring connection methods, have vibration resistance characteristics and can be connected with a cross-sectional area of 0.08mm² To 16mm². All types of wires with a spacing of 2.5mm to 10.16mm are available for selection, and can be used interchangeably with screw connected PCB wiring terminals, increasing flexibility Sex. The product design complies with international standards such as IEC60998 and UL1059. Has obtained UL certification in the United States.



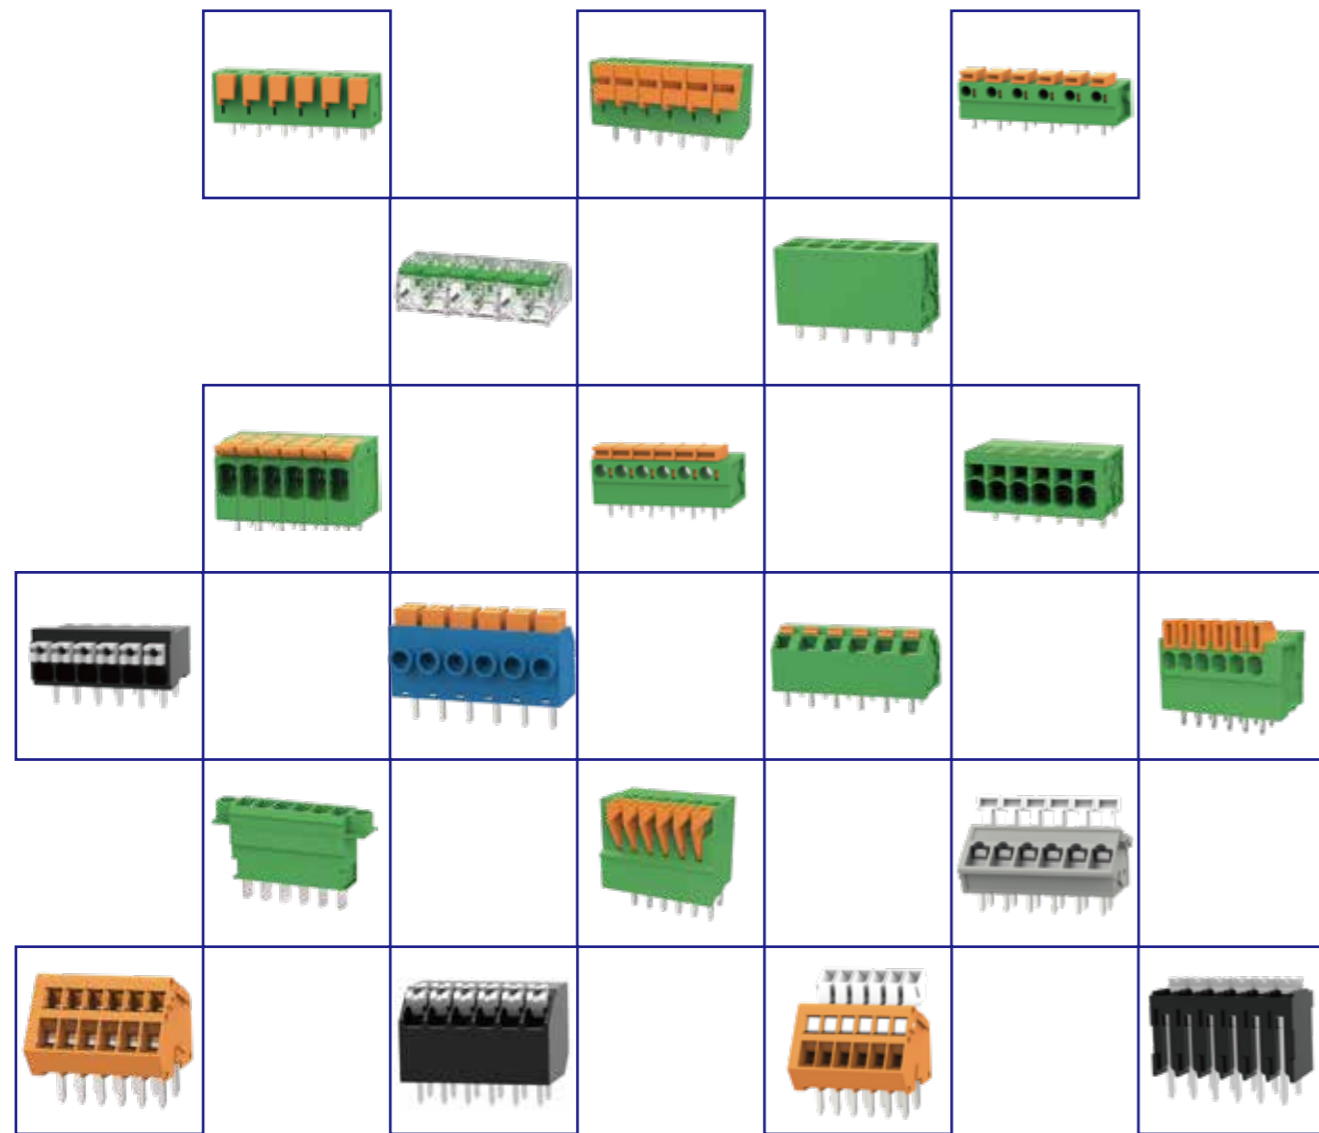


弹簧式接线端子 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		41	41	5
接线范围 Wire Range		8-24		
单/多芯线 Solid/Stranded [AWG]		8-24		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	-
额定电流 Rated Current [A]		6	6	-
接线范围 Wire Range		18-4		
单/多芯线 Solid/Stranded [AWG]		18-4		
间距 Pitch [mm]		10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

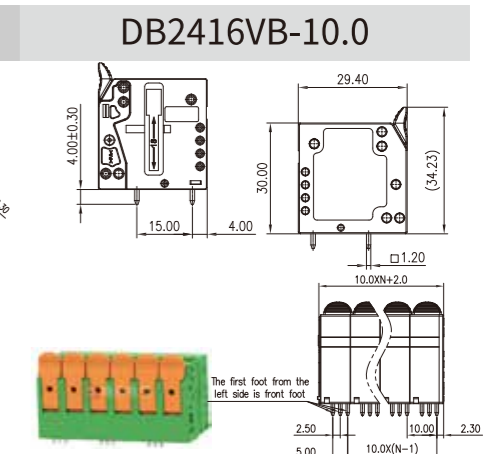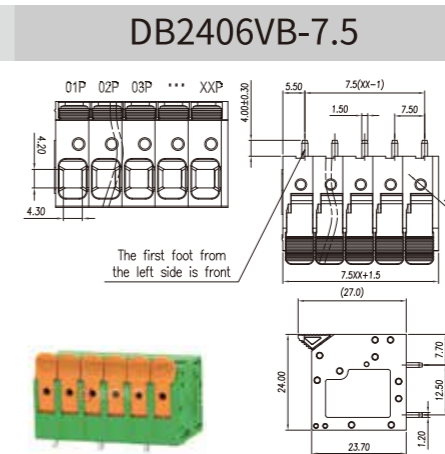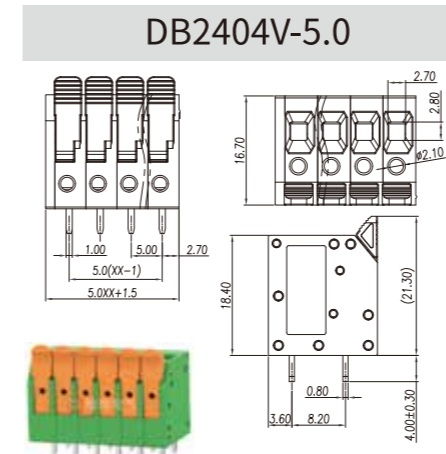

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		20	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	-
额定电流 Rated Current [A]		66	66	-
接线范围 Wire Range		18-4		
单/多芯线 Solid/Stranded [AWG]		18-4		
间距 Pitch [mm]		10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		41	41	5
接线范围 Wire Range		8-24		
单/多芯线 Solid/Stranded [AWG]		8-24		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

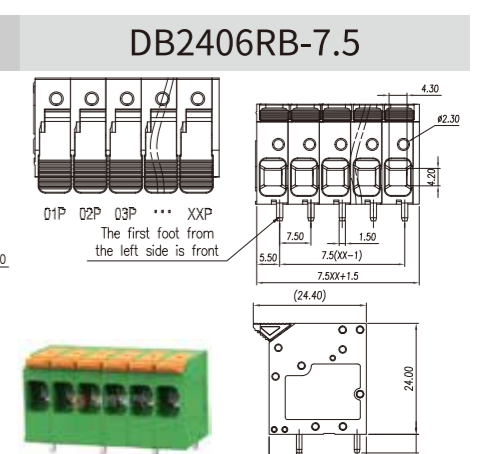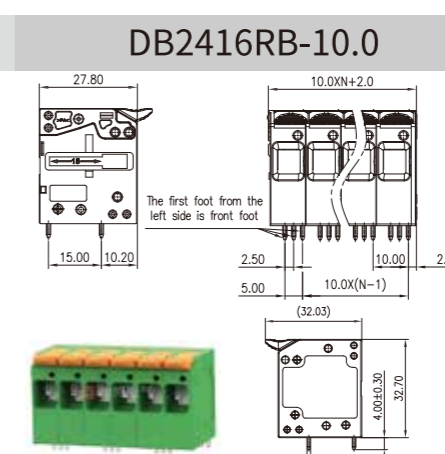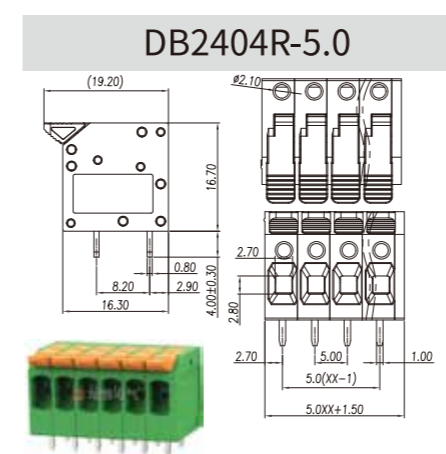

弹簧式接线端子 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	4	-	-
接线范围 Wire Range	26-18		
单/多芯线 Solid/Stranded [AWG]	26-18		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	600
额定电流 Rated Current [A]	27	27	5
接线范围 Wire Range	10-14		
单/多芯线 Solid/Stranded [AWG]	10-14		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	70	-	-
接线范围 Wire Range	18-4		
单/多芯线 Solid/Stranded [AWG]	18-4		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB141V-2.54

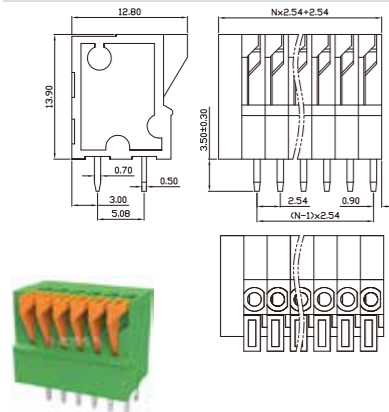


DB240RB-7.5

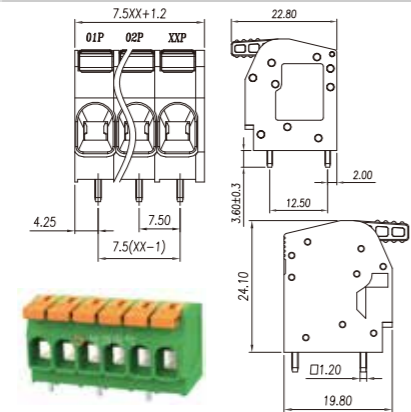


DB239RA-10.0

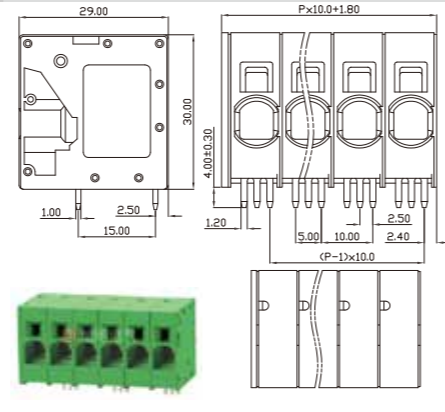


DB241R-5.0

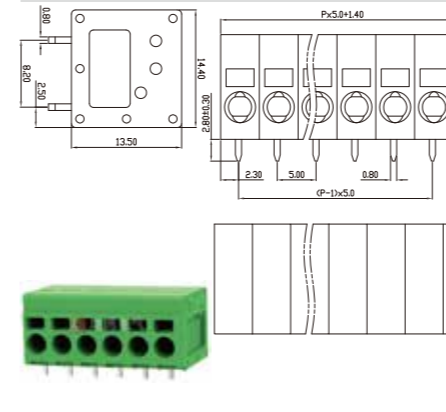

DB241R-3.5

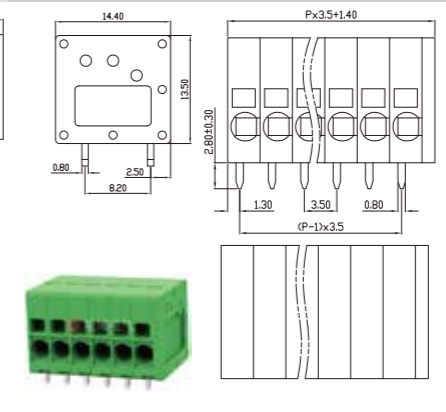

DB241V-5.0

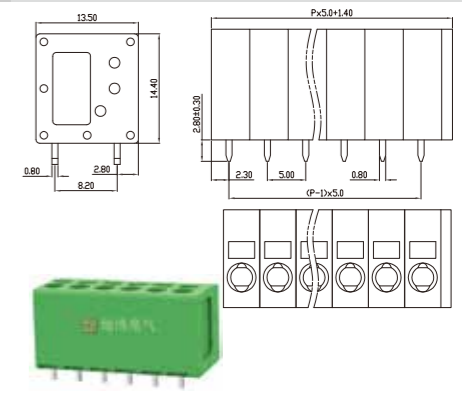

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	70	-	-
接线范围 Wire Range	18-4		
单/多芯线 Solid/Stranded [AWG]	18-4		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	24-10		
单/多芯线 Solid/Stranded [AWG]	24-10		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB239RA-7.5

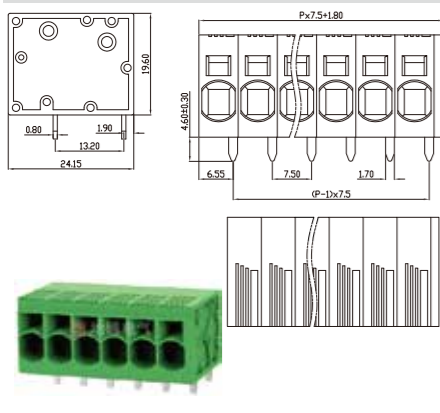


DB239VA-10.0

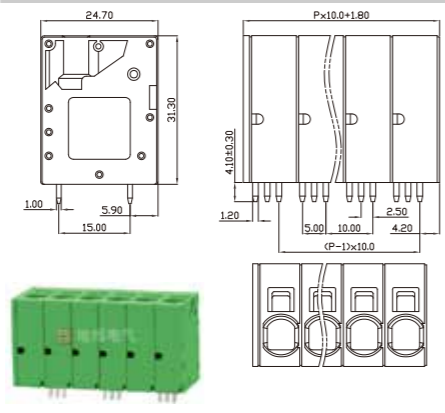


DB239VA-7.5

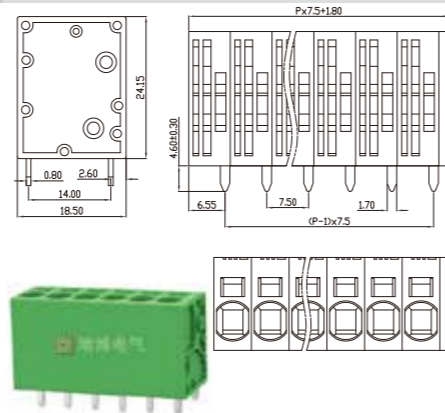


DB241V-3.5

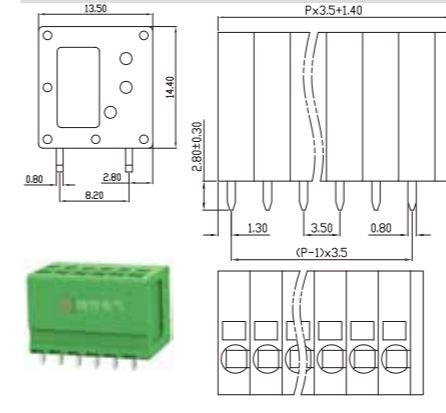

DB2EKDV-5.0

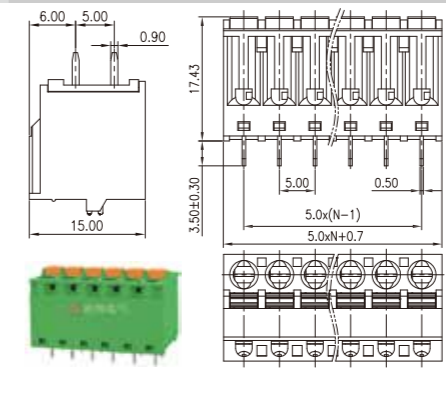

DB804-10.0

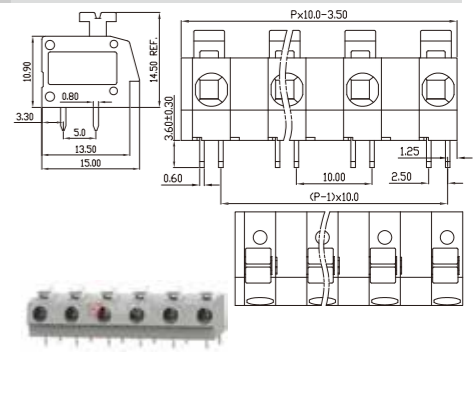

弹簧式接线端子 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	15
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	24-16		
单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	20	-	15
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB241R-5.0

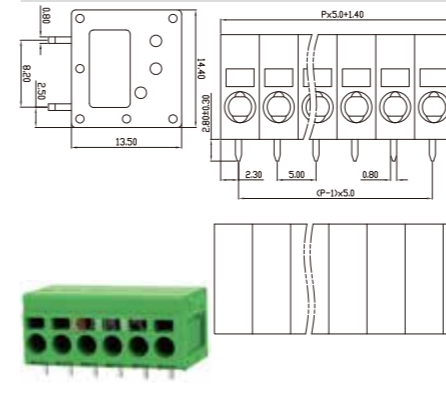

DB241R-3.5

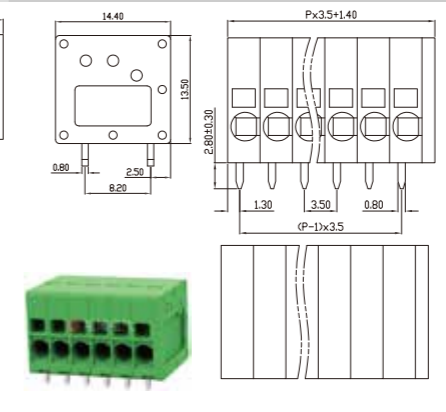

DB241V-5.0

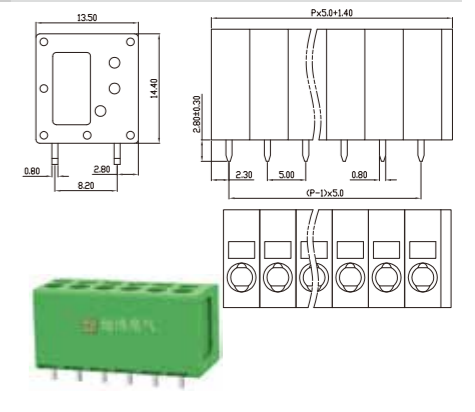

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	24-16		
单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	12	-	-
接线范围 Wire Range	26-12		
单/多芯线 Solid/Stranded [AWG]	26-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	600
额定电流 Rated Current [A]	41	41	5
接线范围 Wire Range	8-24		
单/多芯线 Solid/Stranded [AWG]	8-24		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

弹簧式接线端子 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
--------------------------------------	--	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
--------------------------------------	--	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
--------------------------------------	--	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB804-7.5

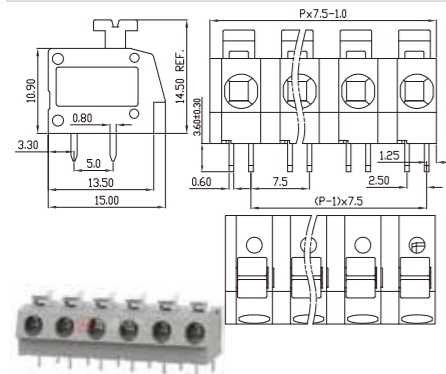


DB804-5.0

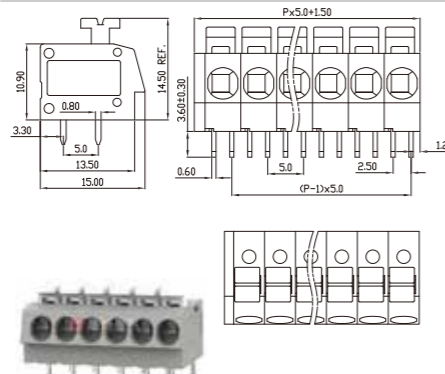


DB252-5.0

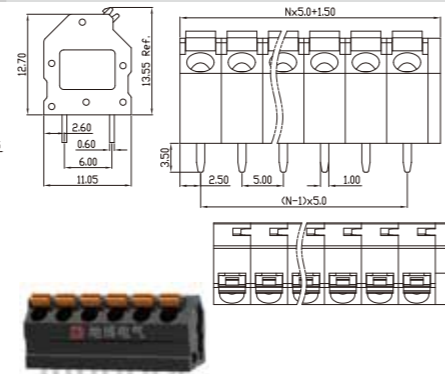


DB500V-5.0

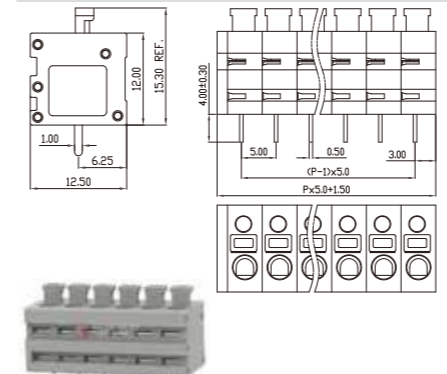

DB500V-2.54

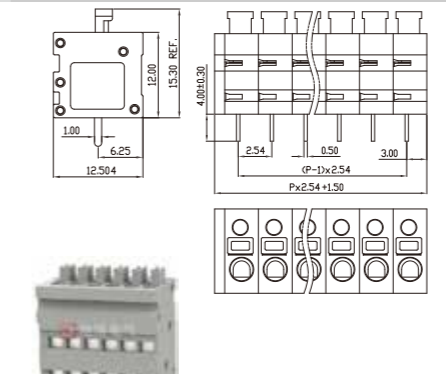

DB500R-5.0

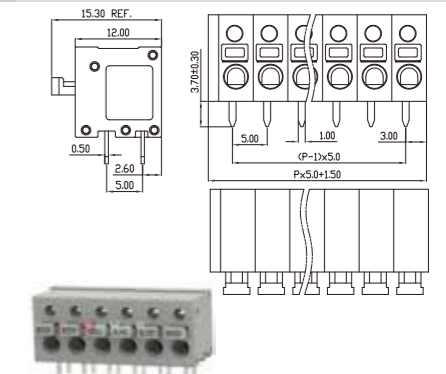

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
--------------------------------------	--	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
--------------------------------------	--	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
--------------------------------------	--	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	30-16		
单/多芯线 Solid/Stranded [AWG]	30-16		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB252H-5.0

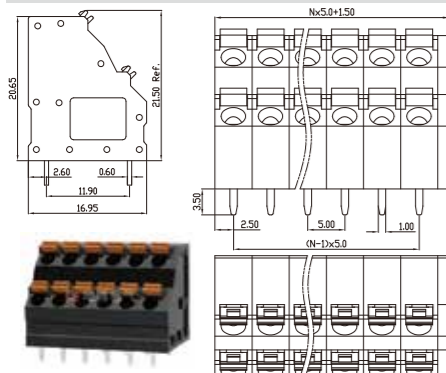

DB252H3-5.0

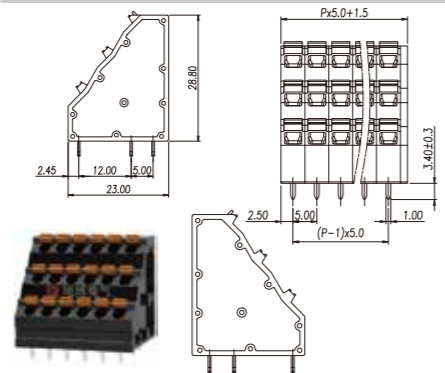

DB252H4-5.0

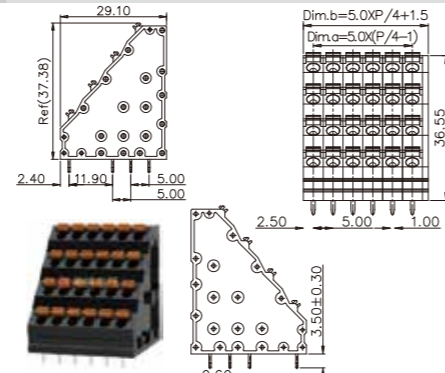

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
--------------------------------------	--	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	140	-	-
额定电流 Rated Current [A]	4	-	-
接线范围 Wire Range	22-14		
单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
--------------------------------------	--	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	22-16		
单/多芯线 Solid/Stranded [AWG]	22-16		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
--------------------------------------	--	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	8	-	-
接线范围 Wire Range	22-18		
单/多芯线 Solid/Stranded [AWG]	22-18		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB500R-2.54

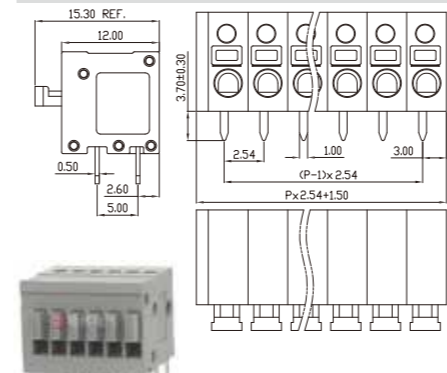

DB280-5.08

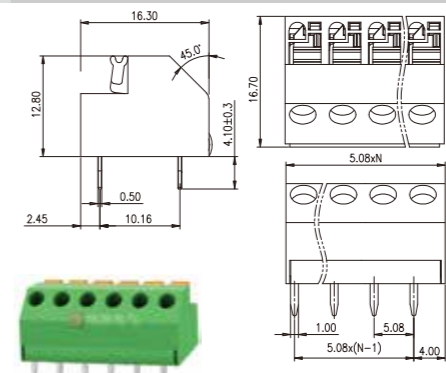

DB271-5.0

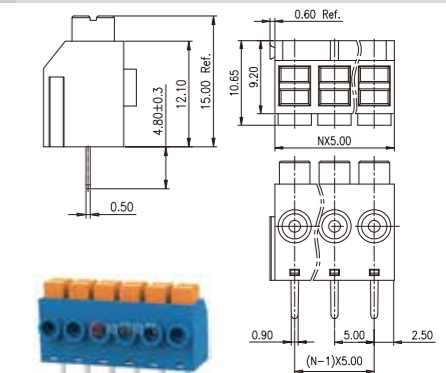

弹簧式接线端子 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data



等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	8	8	8
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	8	8	8
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	8	8	8
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB270-7.5

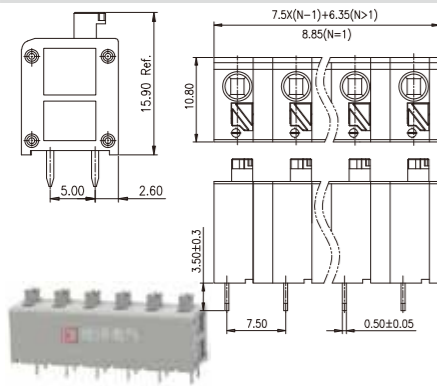

DB270-5.0

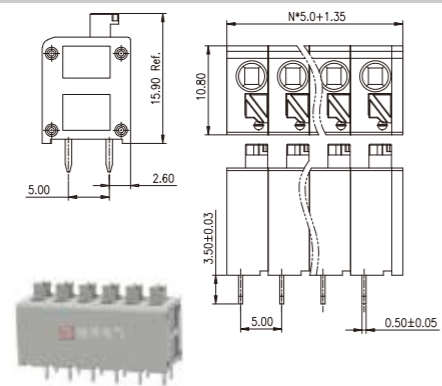

DB270-3.81

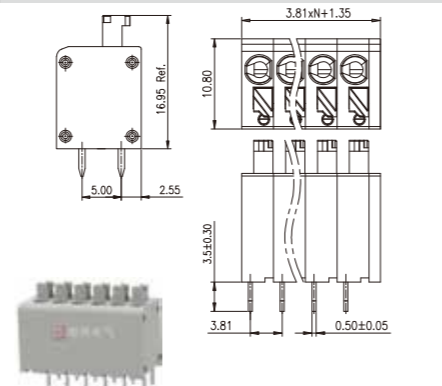

UL/CUL 技术参数 UL/CUL Technical Data



等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	5	5	5
接线范围 Wire Range	20-18		
单/多芯线 Solid/Stranded [AWG]	20-18		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	5	5	5
接线范围 Wire Range	20-18		
单/多芯线 Solid/Stranded [AWG]	20-18		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	5	5	5
接线范围 Wire Range	20-18		
单/多芯线 Solid/Stranded [AWG]	20-18		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB260W-10.0

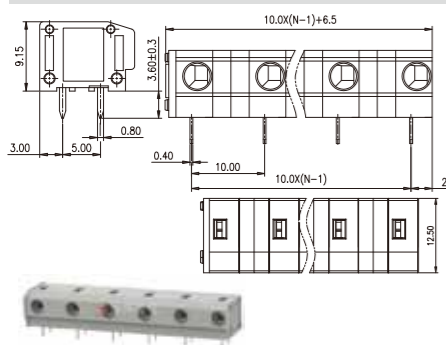

DB260W-7.5

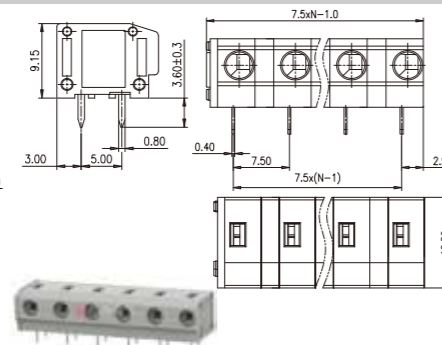

DB260W-5.0

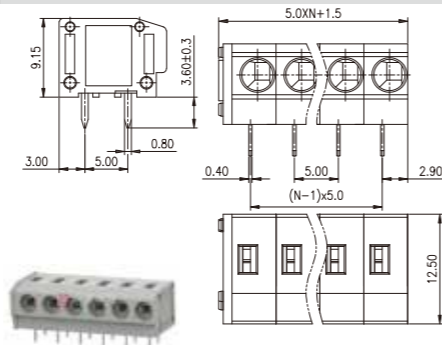

弹簧式接线端子 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data



等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	5	5	5
接线范围 Wire Range	20-18		
单/多芯线 Solid/Stranded [AWG]	20-18		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range	20-14		
单/多芯线 Solid/Stranded [AWG]	20-14		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	5	-	5
接线范围 Wire Range	22-18		
单/多芯线 Solid/Stranded [AWG]	22-18		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB260-10.0

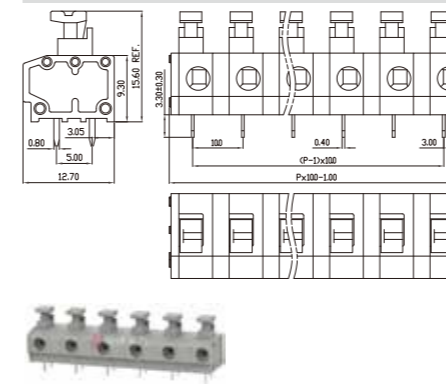

DB260-7.5

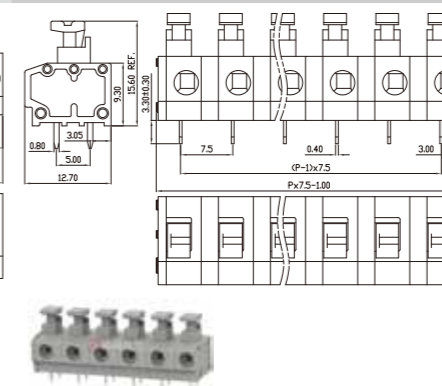

DB260-5.0

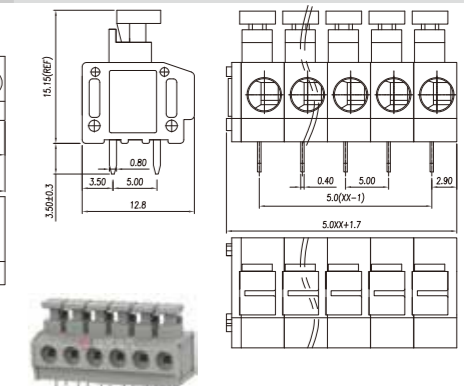

UL/CUL 技术参数 UL/CUL Technical Data



等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range	20-14		
单/多芯线 Solid/Stranded [AWG]	20-14		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	-
额定电流 Rated Current [A]	4	4	-
接线范围 Wire Range	22-18		
单/多芯线 Solid/Stranded [AWG]	22-18		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	-
额定电流 Rated Current [A]	4	4	-
接线范围 Wire Range	22-18		
单/多芯线 Solid/Stranded [AWG]	22-18		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB260-3.81

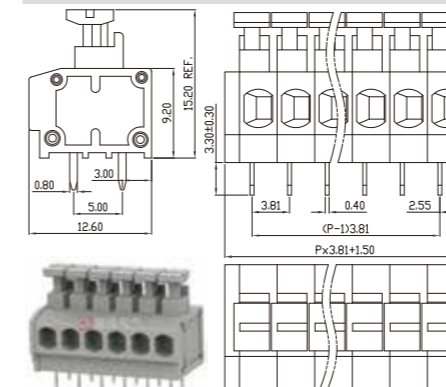

DB250WB-3.5

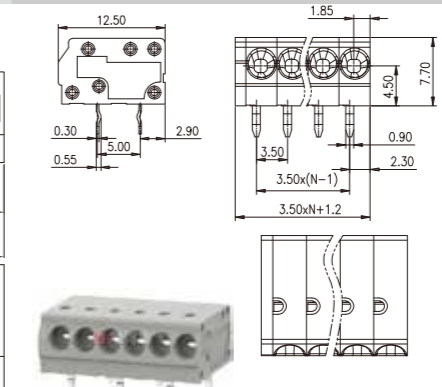

DB250WA-3.5

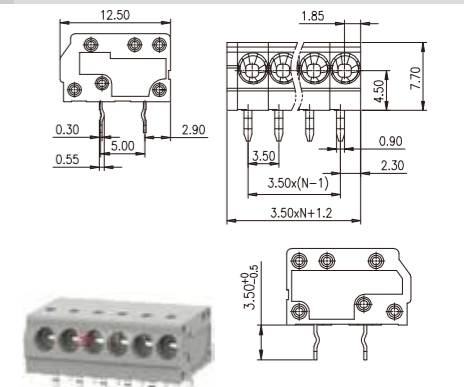

弹簧式接线端子 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data



等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	8	8	8
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	7.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		




UL/CUL 技术参数 UL/CUL Technical Data



等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	8	8	8
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	7.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	600
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	22-16		
单/多芯线 Solid/Stranded [AWG]	22-16		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

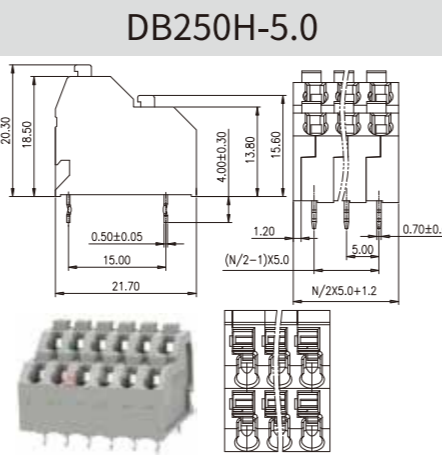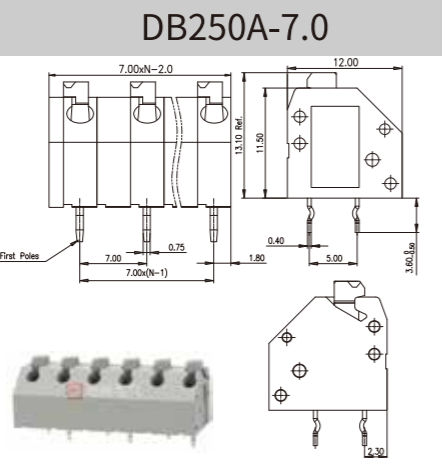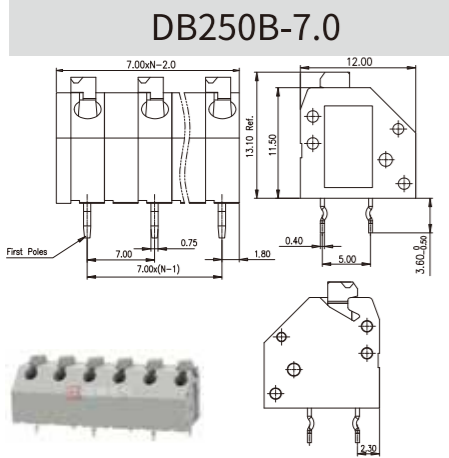

UL/CUL 技术参数 UL/CUL Technical Data



等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	8	8	8
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		




UL/CUL 技术参数 UL/CUL Technical Data



等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	8	8	8
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	2	2	2
接线范围 Wire Range	24-20		
单/多芯线 Solid/Stranded [AWG]	24-20		
间距 Pitch [mm]	2.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

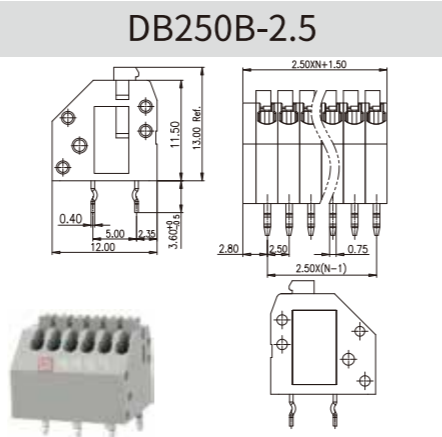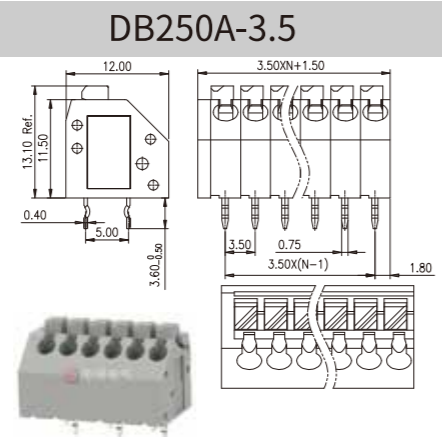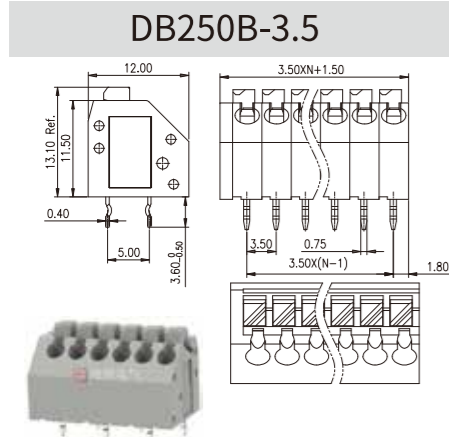

弹簧式接线端子 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data



等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	300	300
额定电流 Rated Current [A]	2	2	2
接线范围 Wire Range	24-20		
单/多芯线 Solid/Stranded [AWG]	24-20		
间距 Pitch [mm]	2.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data






等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	150	150
额定电流 Rated Current [A]	4	4	4
接线范围 Wire Range	28-20		
单/多芯线 Solid/Stranded [AWG]	28-20		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data



等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	150	150
额定电流 Rated Current [A]	4	4	4
接线范围 Wire Range	28-20		
单/多芯线 Solid/Stranded [AWG]	28-20		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

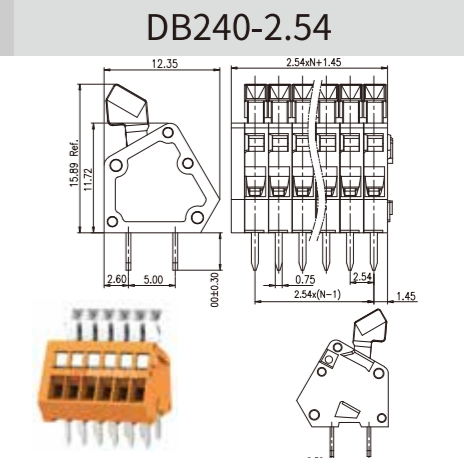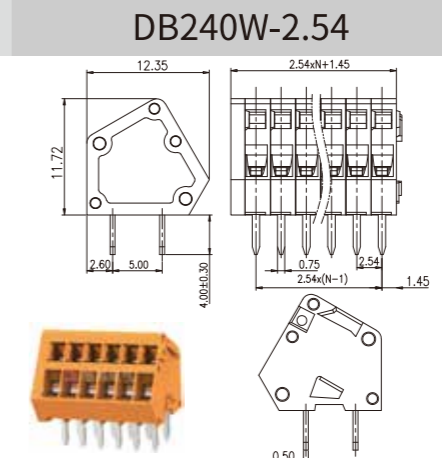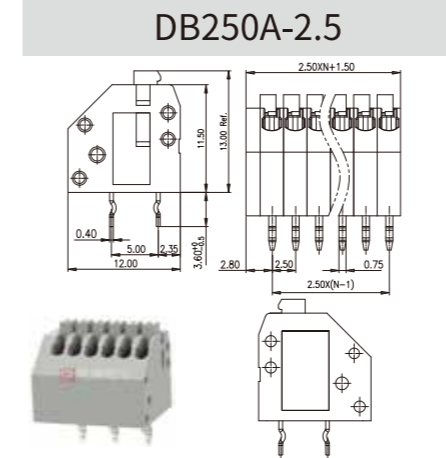

UL/CUL 技术参数 UL/CUL Technical Data



等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	8	-	-
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data






等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	8	-	-
接线范围 Wire Range	20-16		
单/多芯线 Solid/Stranded [AWG]	20-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data



等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	150	300
额定电流 Rated Current [A]	66	66	10
接线范围 Wire Range	28-4		
单/多芯线 Solid/Stranded [AWG]	28-4		
间距 Pitch [mm]	10.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

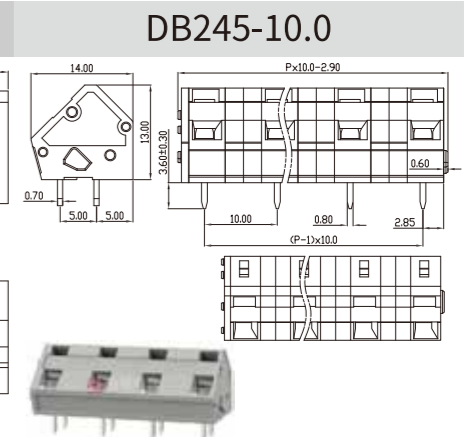
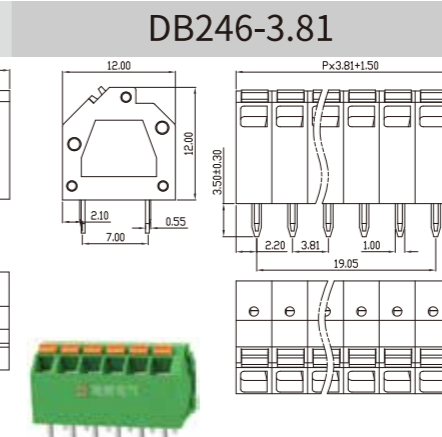
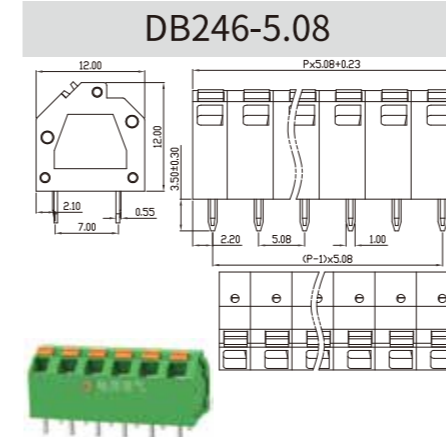


弹簧式接线端子 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

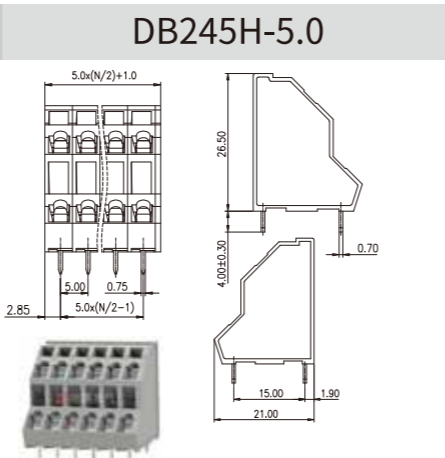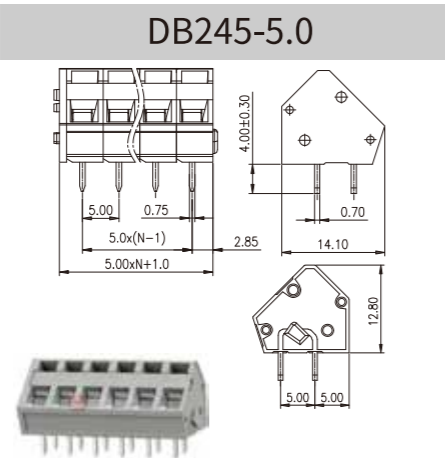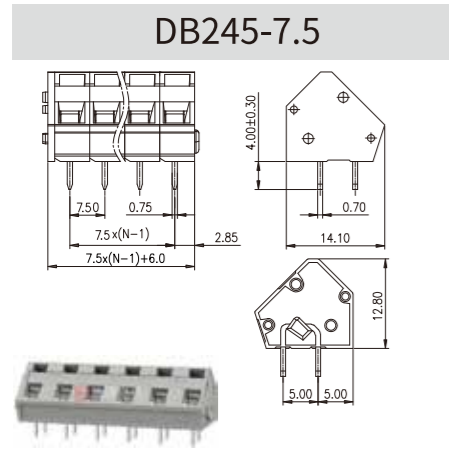

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

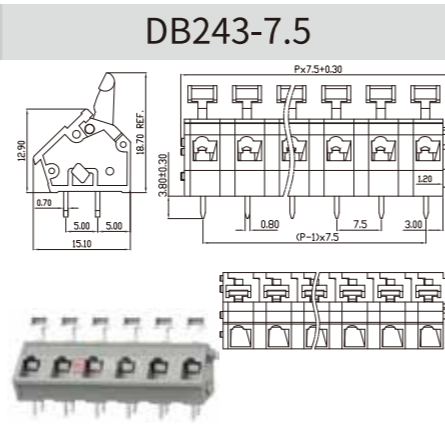
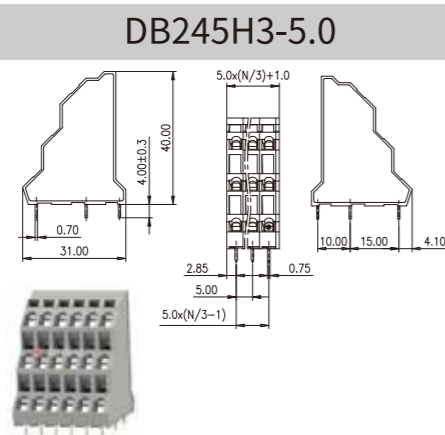
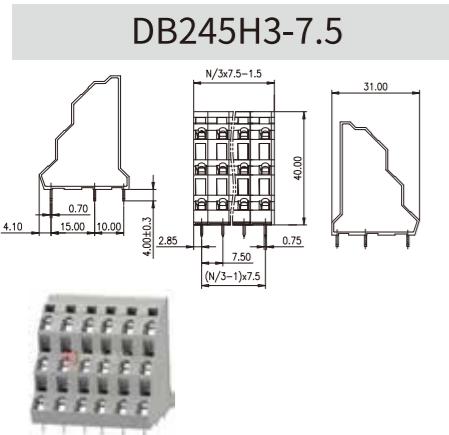


弹簧式接线端子 Spring-type terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		22-18		
单/多芯线 Solid/Stranded [AWG]		22-18		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	-	-
额定电流 Rated Current [A]		4	-	-
接线范围 Wire Range		26-18		
单/多芯线 Solid/Stranded [AWG]		26-18		
间距 Pitch [mm]		2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		6	-	10
接线范围 Wire Range		28-14		
单/多芯线 Solid/Stranded [AWG]		28-14		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

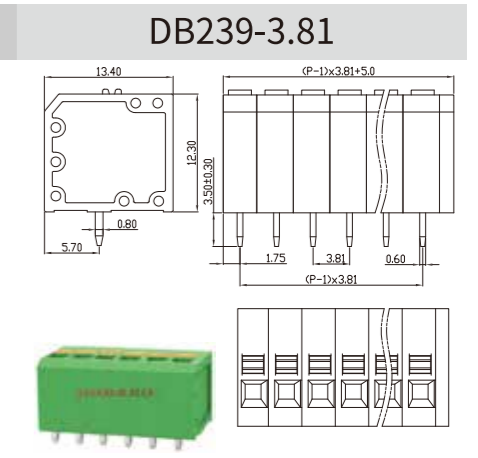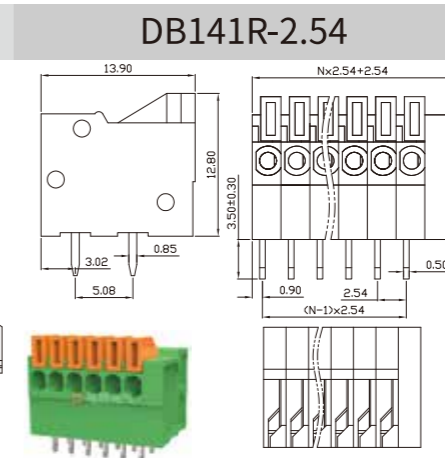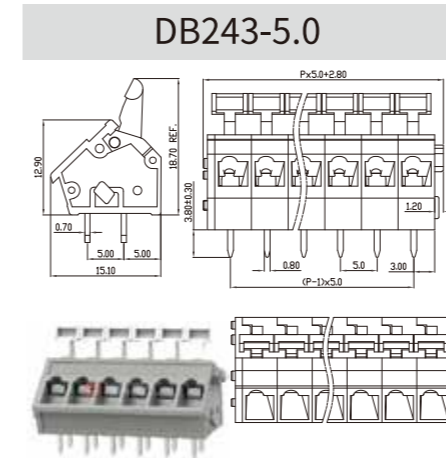

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		28-14		
单/多芯线 Solid/Stranded [AWG]		28-14		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		28-14		
单/多芯线 Solid/Stranded [AWG]		28-14		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		28-14		
单/多芯线 Solid/Stranded [AWG]		28-14		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

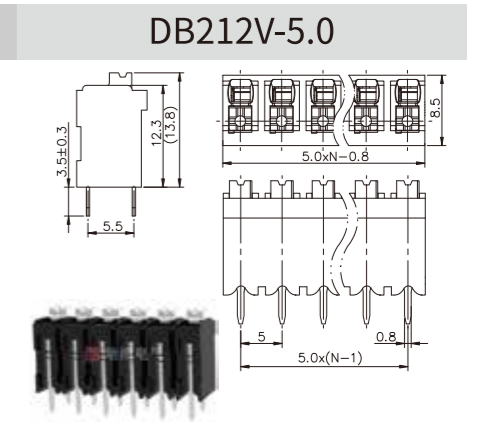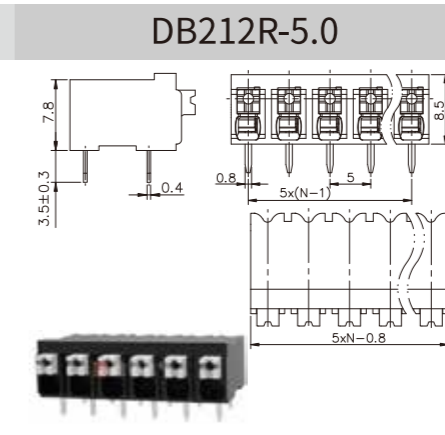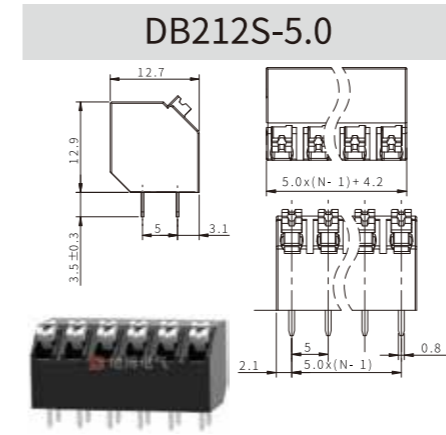

弹簧式接线端子 Spring-type terminal block

UL/CUL 技术参数
UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range	28-14		
单/多芯线 Solid/Stranded [AWG]	28-14		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range	28-14		
单/多芯线 Solid/Stranded [AWG]	28-14		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range	28-14		
单/多芯线 Solid/Stranded [AWG]	28-14		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

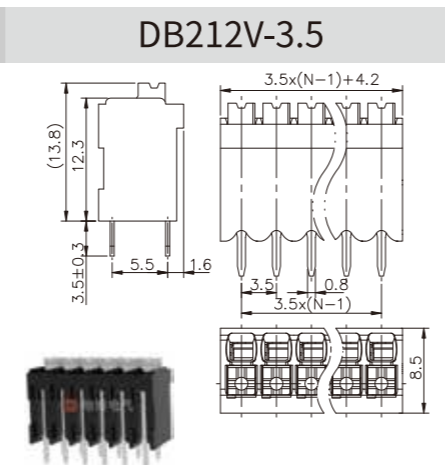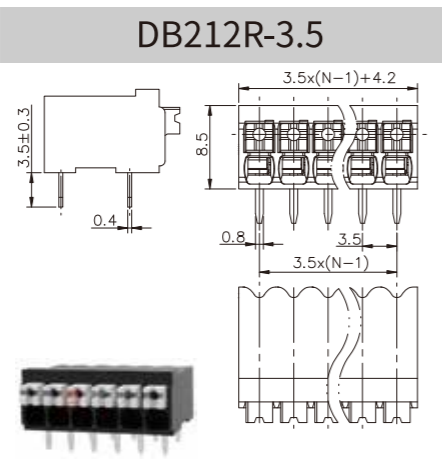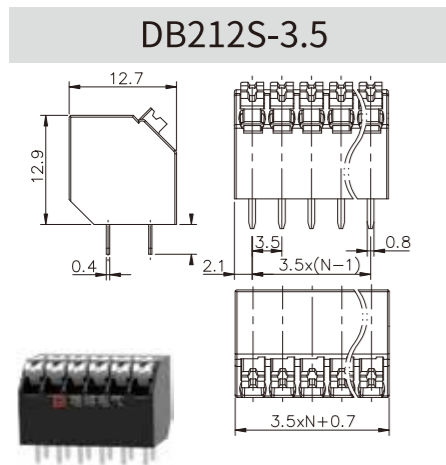

UL/CUL 技术参数
UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range	28-14		
单/多芯线 Solid/Stranded [AWG]	28-14		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	24-14		
单/多芯线 Solid/Stranded [AWG]	24-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	24-14		
单/多芯线 Solid/Stranded [AWG]	24-14		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

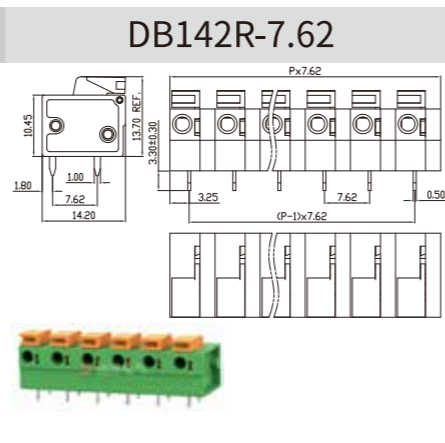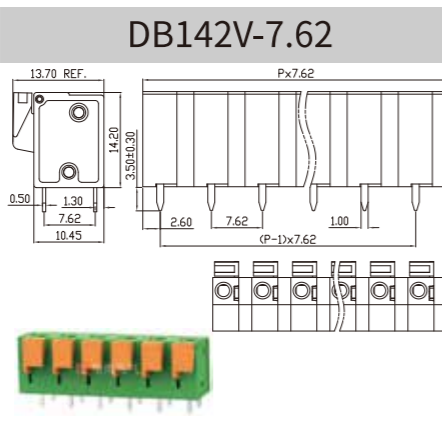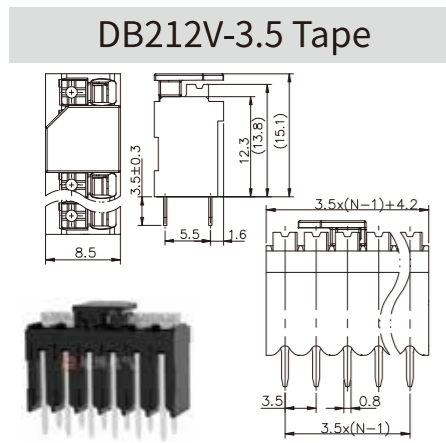

弹簧式接线端子 Spring-type terminal block

UL/CUL 技术参数
UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	24-14		
单/多芯线 Solid/Stranded [AWG]	24-14		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	24-14		
单/多芯线 Solid/Stranded [AWG]	24-14		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	-	-	-
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.6		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

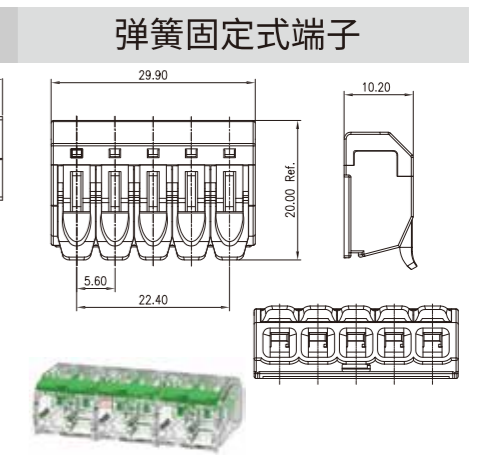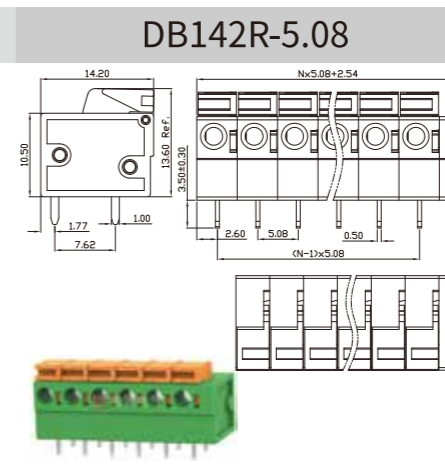
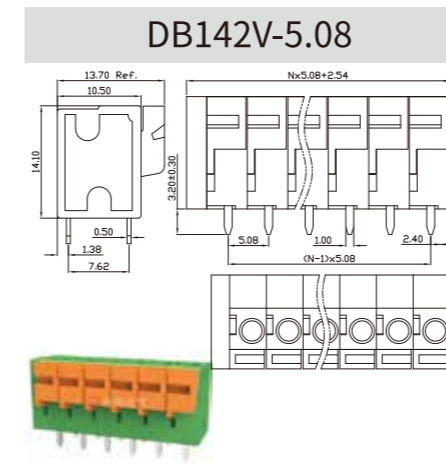


UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	3	-	3
接线范围 Wire Range	26-22		
单/多芯线 Solid/Stranded [AWG]	26-22		
间距 Pitch [mm]	3.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	300
额定电流 Rated Current [A]	9	-	9
接线范围 Wire Range	24-18		
单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	4.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

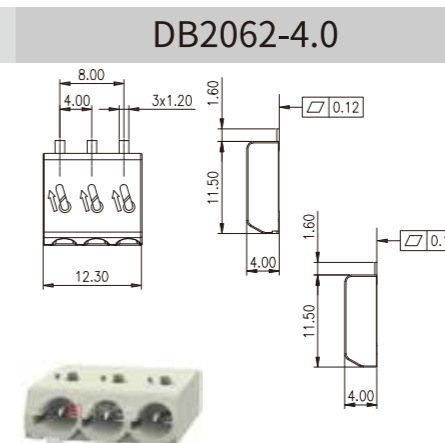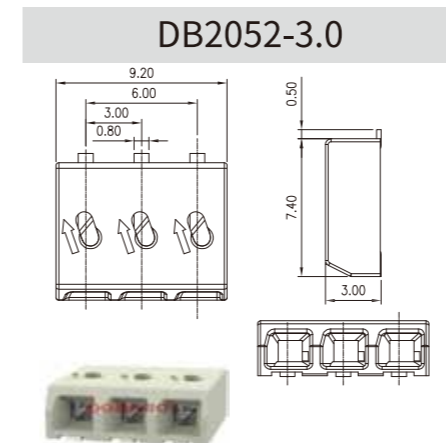

Feed-through terminal block

建筑布线式接线端子


Convenient and reliable connection of two conductors, with a connection cross-section of 0.5mm² To 16mm² All types of wires, with or without fuses Two types of silk. The product design complies with international standards such as IEC60998 and UL1059. We have obtained CQC certification in China and UL certification in the United States.



Rail terminal block

轨道式接线端子

The rail mounted wiring terminal adopts spring clip or wire pressing frame clamping technology, which is convenient for wiring operation, seismic stability, and supports DIN rail installation. Meet 0.2-16 square meters Connect all types of wires to safely and reliably connect various electrical signals in the circuit. The product design and manufacturing standards have been merged through IEC/EN60947 Testing according to relevant standards such as UL1059

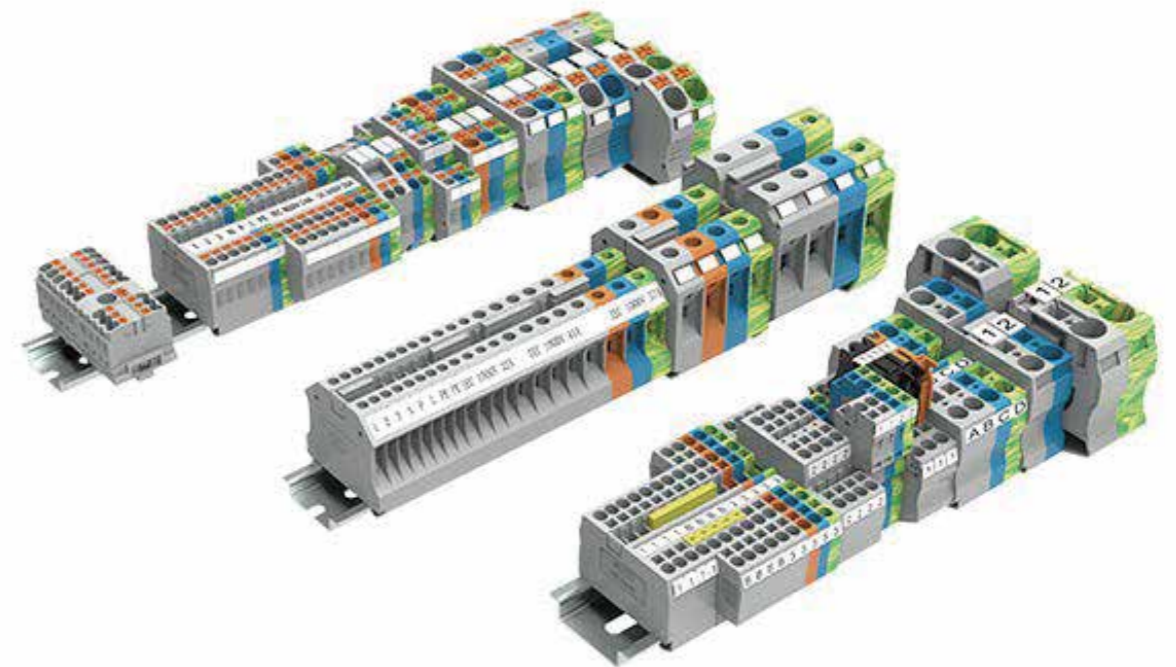

Energy storage connector

储能连接器

Dorabo Fence Connection Terminal Products cover various specifications such as welding, through type, relay type, etc. The maximum rated current can support up to 180A, meeting the voltage of 600V. The product is suitable for equipment and cabinet installation, especially supporting high-power application.



Circular Connector

圆形连接器

Dorabo circular connector has a high protection level of IP67 and a compact design structure, ensuring reliable transmission under various working conditions. Rich product range, providing customers with flexible choices to meet the needs of various fields. At the same time, we provide professional customized services to customers, from parts to complete solutions, providing one-stop services.

